

## 1 Products affected

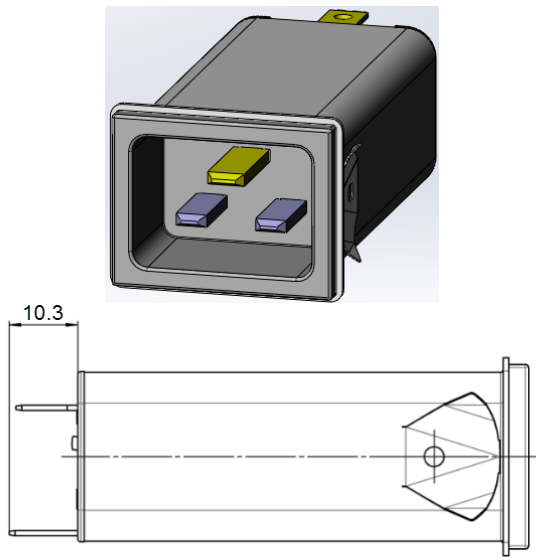
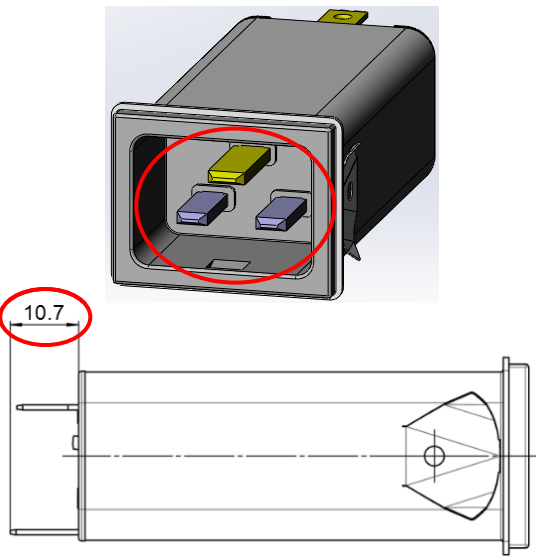
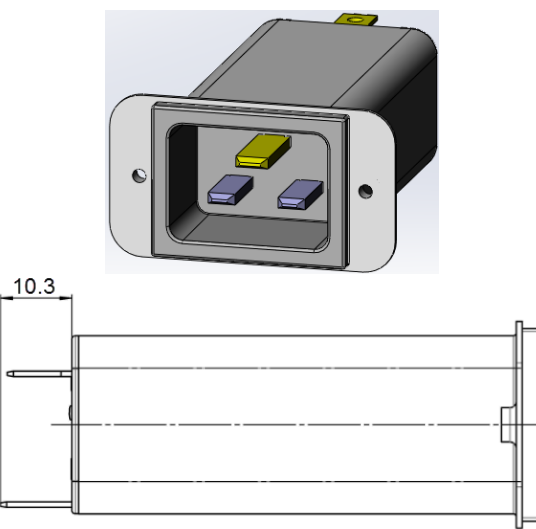
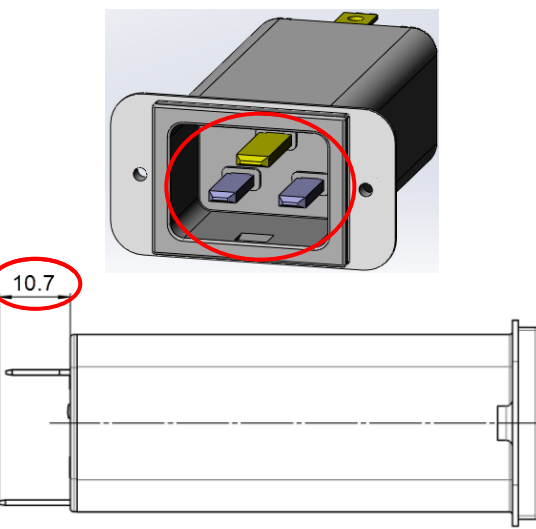
Product hierarchy no. *			Part no.	SBU	Type / Description	Customer part no.
SBU	PG	PGU	Type			
02	006	017	0000001531	See list below	Power Entry Modules with Line Filter	C20F

\*SBU (2-digit) / PG (3-digit) / PGU (3-digit) / Type (10-digit)

List of part numbers affected				
C20F.0011	C20F.0012	C20F.0013	C20F.0014	C20F.0021
C20F.0022	C20F.0023	C20F.0024	C20F.0025	C20F.0026
C20F.0111	C20F.0111.03	C20F.0112	C20F.0112.21	C20F.0113
C20F.0114	C20F.0121	C20F.0122	C20F.0123	C20F.0124
C20F.0125	C20F.0126	C20F.0221	C20F.0222	C20F.0222.21
C20F.0223	C20F.0224	C20F.0224.21		

## 2 Type of change

Change of socket material and integration of V-Lock cord retaining feature as standard.

Old product appearance	New product appearance
<p>Snap-in mounting from front side</p> 	<p>Snap-in mounting from front side</p> 
<p>Screw-on mounting from rear side</p> 	<p>Screw-on mounting from rear side</p> 

Product Change Notification						C20F snap-in and screw-on rear version PCN	
owner	creation date	release date	released by	change order no	rev	page	D10-015-728
sariogar	09.05.2017	30.10.2017	blumhe	2010167	A	1 of 2	

As the V-Lock notch and material for enhanced glow wire tests will be standard features, the material numbers with index .21 are obsolete and will be replaced by the standard numbers:

C20F.0112.21 ⇨ C20F.0112      C20F.0224.21 ⇨ C20F.0224  
C20F.0222.21 ⇨ C20F.0222

## 2 Reason of change

- Socket material change from PA6 to PA66/6 to pass the enhanced requirements of glow wire test acc. to IEC 60695-2-12 and -13
- V-Lock cord retaining integrated as standard feature (not an option anymore)

## 3 Release date

The change will be rolled-out starting ww 18/2018 (Date code 1818 or higher on label) and lasts approx. 12 months depending on the variant.

For new orders, the order numbers are continuing to use according to the data sheet.

The delivery of the new variants is dependent of sales.

## 4 Impact of change and recommended action

Form	Yes	Socket has notch for V-Lock cord retaining, new form on extended socket dimension and socket base.
Fit	Yes	Installation depth is 0.40 mm extended.
Function	Yes	V-Lock feature is standard (not an option anymore)
Production Site	No	There is no change of the production site
Product Label	No	No label change
Customer Action	Yes	PE-Terminal is 0.4mm longer. Check installation depth in the application. Change SCHURTER part number if affected.

## 5 Reference Documents / Attachments

Kind of document	Remarks
<a href="#">Data Sheet C20F</a>	

Product Change Notification					C20F snap-in and screw-on rear version PCN		
owner	creation date	release date	released by	change order no	rev	page	D10-015-728
sariogar	09.05.2017	30.10.2017	blumhe	2010167	A	2 of 2	