


1. Wiring Diagram.

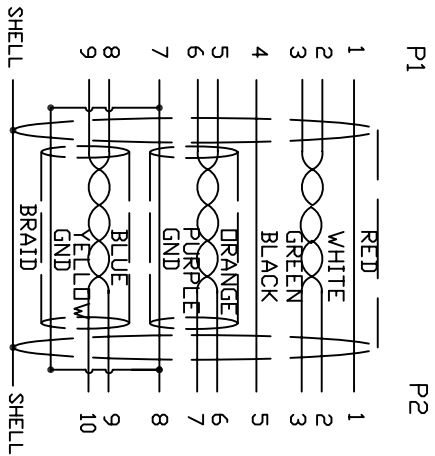

2. Cable test condition :

Open / Short : 100%

Insulation resistance : 5M ohms

Contact resistance : 2 ohm

Hipot : DC 300V / 1 sec

3. Each pcs with PE palybag

8	COPPER	COPPER FOIL 20*40MM	1	
7	COPPER	COPPER FOIL 15*40MM	1	
6	CORE	RH14.2*28.5*6.35mm	2	
5	CONN	USB3.0 MICRO B MAILE G/F BLACK	1	P2
4	PVC	45P PVC BLACK DVERMOLD	25g	
3	PE	LLDPE 500026 6201	16g	
2	CONN	USB3.0 A/M G/F BLUE	1	P1
1	CABLE	《28AWG (7/0.127T) *1P+D(7/0.127T)+AL+M》*2+28AWG (7/0.127T) *1P+24AWG(7/0.2T)*2C+A+D+B (1/1/6/0.12AM) OD5.5 BLACK	1	5000mm
NO.	PART NO.	DESCRIPTION	QTY	UNIT/REF
BILL OF MATERIAL				

A	2015123	INITIAL RELEASE	2015/11/24
REV/ECN#		DESCRIPTION	DATE
<b>Cnc Tech,LLC</b>			
DRAWN	EDWIN/EA	DATE	11/24/15
CHECKED	WENC	DATE	11/24/15
APPROVAL		CUSTOMER P/N:	
		CUSTOMER:	
		TITLE	USB3.0 A/M-MICRO B W/PERIPHERALS,5M
		DWN NO.	103-1092-BL-F0500
		REV	A
		SHEET	1 OF 1