


Notes

1. Data to be collected and Recorded for each assembly
2. Label to Include "ConductRF", Date Code & Part #

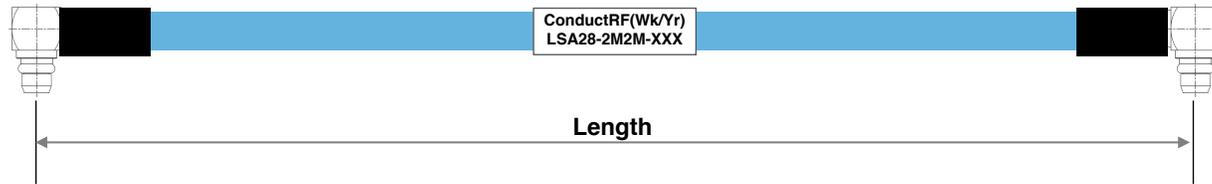

Part No. Configurator - XXX

FXX = Length in Feet (eg F03=3ft)
 SXX = Length in Inches (eg S18=18")
 XMX = Length in Meters (eg 2M5=2.5m)
 CXX = Length in CM (eg C50=50cm)

ConductRF # (XXX)	Length	Max. Insertion Loss(dB)	
		3GHz	6GHz
S06	6"	0.36	0.51
S12	12"	0.59	0.84
S18	18"	0.81	1.17
VSWR Max.		1.40:1	

5	Strain Relief	Shrink Tube	Black
4	Label	Shrink Tube	White
3	Flexible Sprial w. Coax	A28SS	Blue FEP
2	MMCX R/A Male	MMM21C-A28G01	Gold
1	MMCX R/A Male	MMM21C-A28G01	Gold
ITEM	DESCRIPTION	MATERIALS	FINISH

REV.	DESCRIPTION	ECN	DRAWN	DATE	Customer DWG	Title: Flex MMCX R/A Male to R/A Male			
2	Updated MMCX R/A Male to 21C		DG	04/30/20	Remarks: 035/035/10	Originated: 07/30/18	Conduct RF sales@ConductRF.com Tel: +1 978 374 6840	Range: LSA	
1	Pre-Release		DG	07/30/18				Dwg Ref: LSA28-2M2M	
REVISION HISTORY					Length Tolerances: ≤24" = ±0.25" >24" = ± 1%	Checked: JW	Approved: PL	Rev: 2	Part No: LSA28-2M2M-XXX