


# POWER

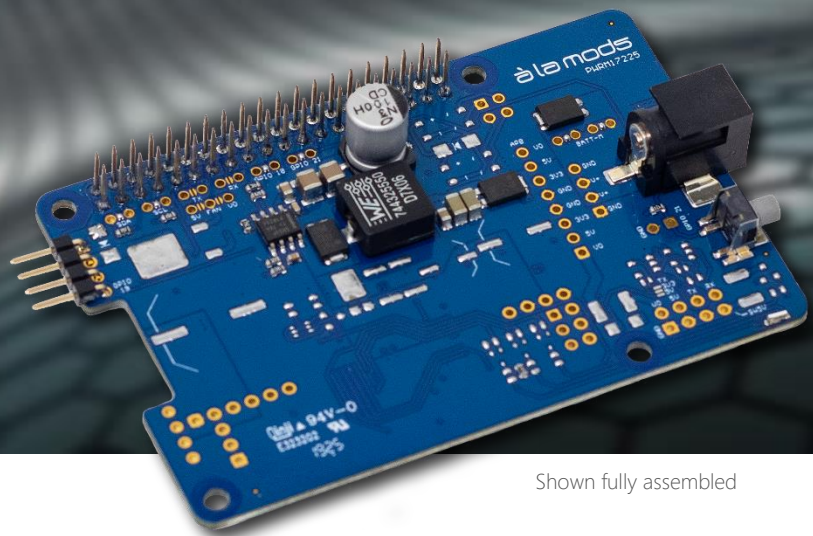

Shown fully assembled

A power supply designed specifically for the Raspberry Pi and the à la mods peripheral stack of modules. This power supply provides several output voltages with plenty of power for the Raspberry Pi 4 and additional accessories. It also supports a wide input range (7 – 36 Vdc).

- Dual or Triple output tap power module
- Enough power for the SBC and other add-on modules
- Stackable à la mods symmetrical power bus
- Selectable power configurations
- Independent power monitoring for each output
- I<sup>2</sup>C bus interface for power monitoring interface
- DC Fan interface – voltage selectable
- Standard Raspberry Pi® 40 pin header pinout
- Uses < 10mA at 3.3V which can be sourced by SBC or internally
- Indicator LED connected to pin 22 GPIO25

# SPECIFICATIONS

Input Vin	7 – 36 (Vdc)
Input Interface	2.1 x 5.5 mm center positive DC barrel jack
Outputs	3.3 (Vdc) @ 800 (mA) <sup>1,2</sup> – power bus port 0 - LDO 5V input
	5.0 (Vdc) @ 2/3.5 (A) – power bus port 1 - TI LMR14050 switch mode power
	Vo (direct connect to Vin) – power bus port 2
Power	10 (mA <sub>max</sub> ) @ 3.3 Vdc
Communication Interface <sup>1</sup>	I <sup>2</sup> C bus (Raspberry Pi® header pins 3 GPIO02 & 5 GPIO03)
Power Monitoring <sup>1</sup>	INA226 Current and Power Monitor IC
	Vo (Vdc) I <sup>2</sup> C addr 0x40
	5.0 (Vdc) I <sup>2</sup> C addr 0x41
	3.3 (Vdc) I <sup>2</sup> C addr 0x44
Operating Temp	0 °C to +50 °C Ambient
L x W	3.35 x 2.20 (85.0 x 56.0 mm)
Height (above pcb)	0.44 (11.1 mm)
Mounting	Tall connector (17 mm standoff)

- 1 Not available on Basic model
- 2 LDO supplied by 5V power source

# ORDERING DETAILS

ORDER NO.	POWER	OUTPUTS	DESCRIPTION
PWRM17225 – 20W *	20 W	5V @ 4 (A <sub>max</sub> ), VO @ 4 (A <sub>max</sub> )	20W basic DC-DC power supply
PWRM17225 – 20W-PM *	<b>available soon</b>		

\* includes 2x20 pin Tall Female Header Connector & 8 pin Male Header Connector