

ITEM	PART#	DESCRIPTION	QTY	UOM
A,B	436400600	MicroFit 3.0 Plug SR Pnl Mnt 6Ckt	2	PC
C	430310023	MICROFIT 3.0 M CRP TERM CHN 30AU 18AWG	12	PC
D	--	PAPER PRINTED PAPER WHITE	1	PC

FROM	TO	DESCRIPTION	COLOR
A1	B6	1X18AWG DISC SR-PVC BK UL10002	BLACK
A2	B5	1X18AWG DISC SR-PVC BK UL10002	BLACK
A3	B4	1X18AWG DISC SR-PVC BK UL10002	BLACK
A4	B3	1X18AWG DISC SR-PVC BK UL10002	BLACK
A5	B2	1X18AWG DISC SR-PVC BK UL10002	BLACK
A6	B1	1X18AWG DISC SR-PVC BK UL10002	BLACK

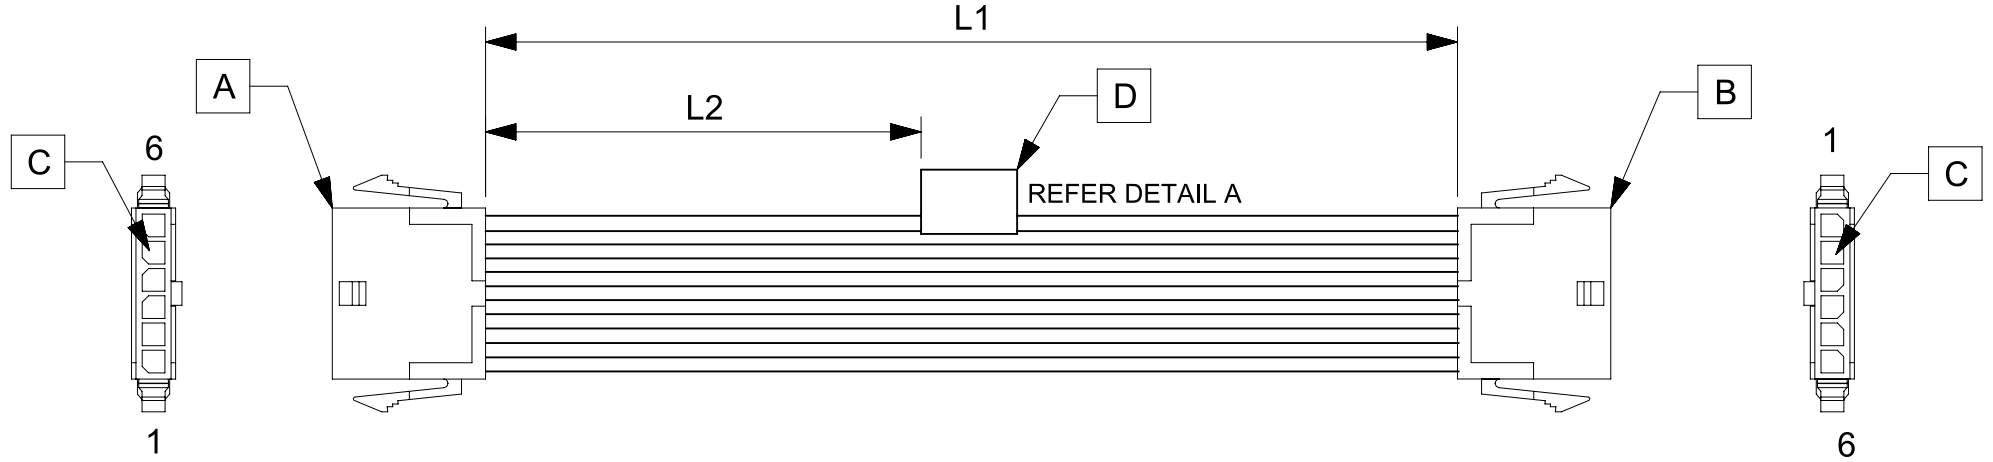


TABLE			
PART NUMBER	L1	L2	TITLE
2147522061	150±8	63 REF	MICROFIT 3.0 SR P-P 6CKT 150 MM Au
2147522062	300±10	138 REF	MICROFIT 3.0 SR P-P 6CKT 300 MM Au
2147522063	600±10	288 REF	MICROFIT 3.0 SR P-P 6CKT 600 MM Au

**NOTES**

1. Cable assembly must pass 100% continuity and polarity test.
2. Connector view shown is from mating side.
3. Label text must be 2mm max. in height with Arial font.
4. Label must be wrapped in Flag type on a single cable.

MOLEX P/N  
 MOLEX  
 BATCH WK/YR  
 DETAIL A

REVISION			
DATE	REV	DESCRIPTION	CHANGER
2020/02/29	A	INITIAL RELEASE	ARAJU

FUNCTIONAL SYMBOLS $\frac{E}{A} = 0$ $\frac{E}{E} = 0$ $\frac{E}{P} = 0$ DIVISIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		CURRENT REV DESC:		
	DIMENSION UNITS	SCALE	EC NO: 637489		
	mm	NTS	DRWN: ARAJU 2020/03/02		
	GENERAL TOLERANCES (UNLESS SPECIFIED)		CHK'D: RDESAI01 2020/05/14		
ANGULAR TOL ± °		APPR: RDESAI01 2020/05/14		PRODUCT CUSTOMER DRAWING	
4 PLACES ±		INITIAL REVISION:		DOCUMENT NUMBER	
3 PLACES ±		DRWN: ARAJU 2020/03/02		2147522061	
2 PLACES ±		APPR: RDESAI01 2020/05/14		DOC TYPE DOC PART REVISION	
1 PLACE ±		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		PSD 000 A	
0 PLACES ±		THIRD ANGLE PROJECTION		MATERIAL NUMBER CUSTOMER SHEET NUMBER	
		DRAWING SERIES		SEE TABLE GENERAL MARKET 1 OF 1	
		A4-SIZE 214752			

DOCUMENT STATUS	P1	RELEASE DATE	2020/05/14	03:37:10
-----------------	----	--------------	------------	----------