
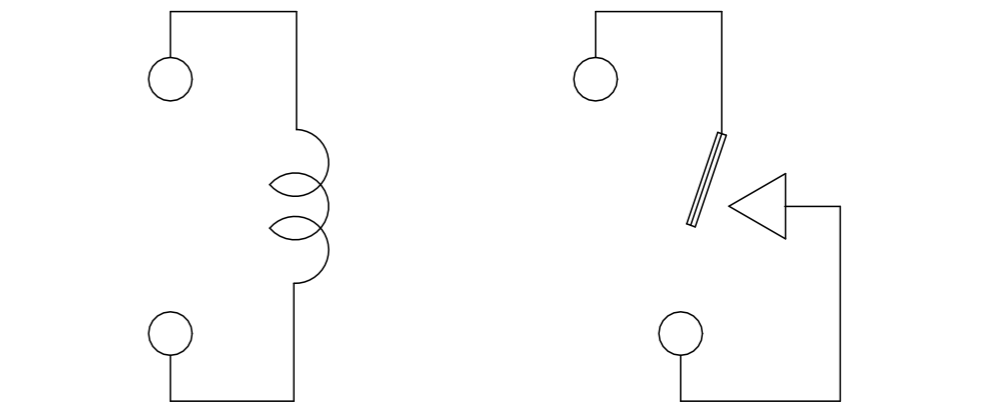
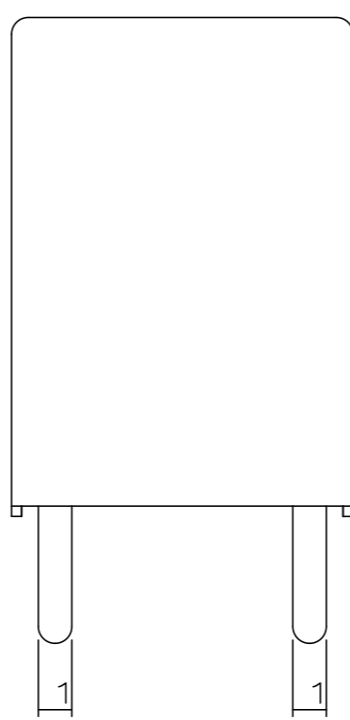
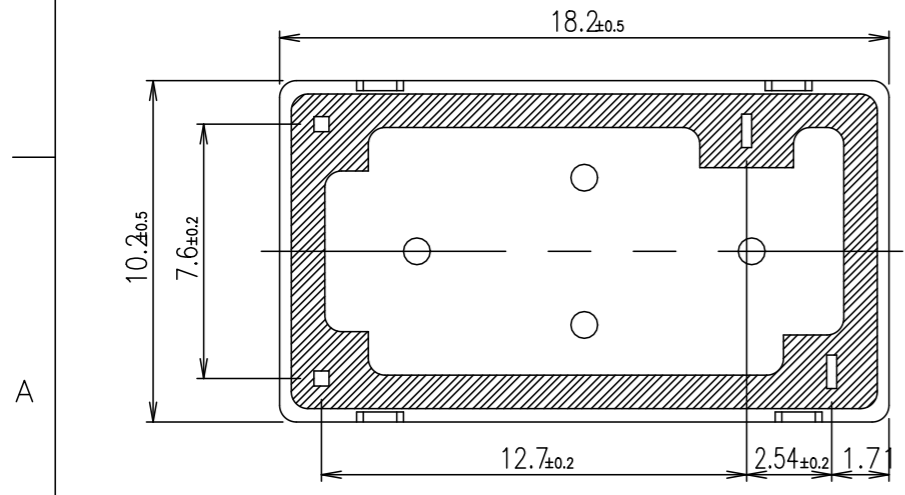


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - TE CONNECTIVITY ALL RIGHTS RESERVED.

REVISIONS				
P	LTR	DESCRIPTION	DATE	APVD
E1		NEW ADD PN ECO-17-004477	31-Mar-17	WQ.Y HL.C
E2		NEW ADD PN ECO-19-017316	13-Nov-19	WQ.Y K.T

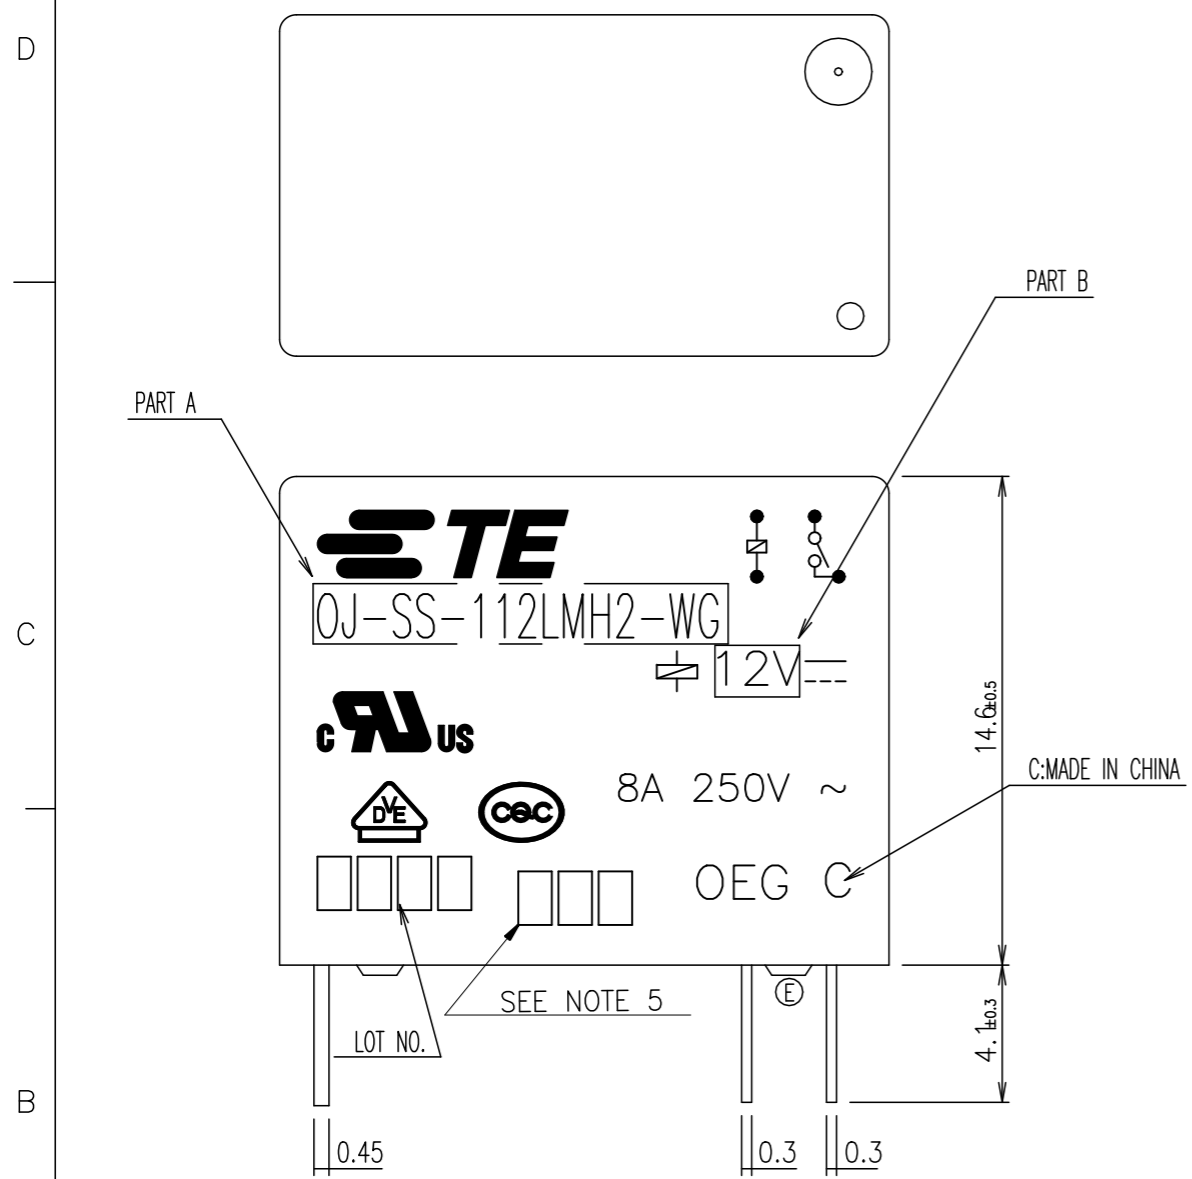

CONNECTION FIGURE

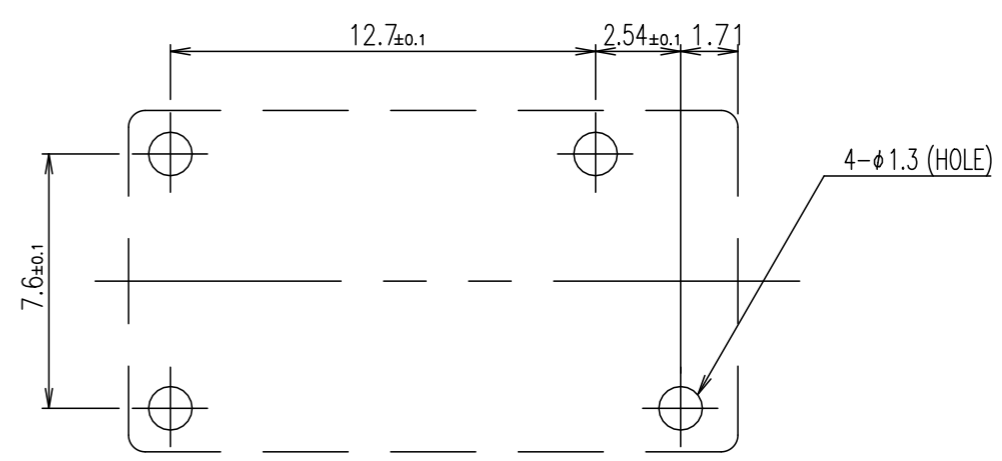


FIGURE FOR PRINTED CIRCUIT BOARD PROCESSING (BOTTOM VIEW)

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	24AUG2012		
		CHK	FU.BO		
		N.FUNAYAMA			
		APVD	XIAONING,ZHANG		
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:			NAME
		0 PLC	± -		OJ-SS-LMH2-WG SPEC,000
		1 PLC	± -		
		2 PLC	± -		
		3 PLC	± -		
		4 PLC	± -		SIZE
		ANGLES	± -		CAGE CODE
MATERIAL		FINISH			DRAWING NO
					RESTRICTED TO
					A3 00779 C= 1721874
CUSTOMER DRAWING					SCALE 5:1 SHEET 1 OF 2 REV E2

4

3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
© COPYRIGHT - By - TE CONNECTIVITY ALL RIGHTS RESERVED.

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
-	-	SEE SHEET 1	-	-	-


②	107-84030	1-1721874-0	OJ-SS-112LMH2-WG	12V	OJ-SS-112LMH2-WG	i
②	107-84030	1721874-9	OJ-SS-124LMH2-WG	24V	OJ-SS-124LMH2-WG	h
③	107-84030	1721874-8	OJ-SS-124LMH2-WG	24V	OJ-SS-124LMH2-WG	g
107-79010	1721874-6	OJ-SS-124LMH2-WG	24V	OJ-SS-124LMH2-WG	f	
	1721874-5	OJ-SS-112LMH2-WG	12V	OJ-SS-112LMH2-WG	e	
	1721874-4	OJ-SS-109LMH2-WG	9V	OJ-SS-109LMH2-WG	d	
	1721874-3	OJ-SS-106LMH2-WG	6V	OJ-SS-106LMH2-WG	c	
	1721874-2	OJ-SS-105LMH2-WG	5V	OJ-SS-105LMH2-WG	b	
	1721874-1	OJ-SS-103LMH2-WG	3V	OJ-SS-103LMH2-WG	a	
PACKAGE SPEC	TE PART NO	DESCRIPTION	PART B	PART A	TYPE	

Diagram dimension	Tolerance
0.99mm max.	±0.1mm
1 - 2.99mm	±0.2mm
3mm min.	±0.3mm

RELAY TYPE

NOTES:

- 1. TERMINAL DIMENSION BEFORE TINNING.
- 2. LOT NO. SYSTEM AS FOLLOWING:



- 2. TERMINAL DIMENSION IS BEFORE SOLDER DIP;
- 3. FOR THE TIN-PLATING OF THE PINS:
+0.1mm FOR WIDTH, THICKNESS AND DIAMETER.
+0.5mm FOR LENGTH.

4. MARKING FROM INK TO LASER AND USING WELDING CONTACT

5. ADD LOT NO. SYSTEM AS FOLLOWING;



- I, DIGITS FOR DAY OF THE WEEK
1...MONDAY IN THIS WEEK;
2...TUESDAY IN THIS WEEK;
7...SUNDAY IN THIS WEEK
- II, DIGITS FOR SHIFT OF THE DAY
1...DAY SHIFT IN THIS DAY;
2...NIGHT SHIFT IN THIS DAY;
- III, ONE CHARACTER DISTINGUISH THE LINE IDENTITY, SUCH AS: A,B,....Z

		EPOXY RESIN	SEAL (BASE & BOBBIN)	15
		MW79	MAGNETIC WIRE	14
94V-0		NYLON	CASE	13
94V-0		P.E.T	BASE	12
94V-0		NYLON	BOBBIN	11
	SOLDER DIP	C.P WIRE	COIL TERMINAL	10
94V-0		P.P.S	CARD	9
		Ag ALLOY	MOVABLE CONTACT	8
		Ag ALLOY	NO.CONTACT	7
		STEEL	HINGE SPRING	6
	SOLDER DIP	Cu ALLOY	NO.TERMINAL	5
	SOLDER DIP	Cu ALLOY	MOVABLE SPRING	4
	NIP	STEEL	CORE	3
	NIP	STEEL	ARMATURE	2
	NIP	STEEL	YOKE	1
INCOMBUSTIBILITY	TREATMENT	MATERIAL	DESCRIPTION	ITEM

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	24AUG2012	
		CHK	FU.BO	
		APVD	N,FUNAYAMA	
		PRODUCT SPEC	XIAONING,ZHANG	
		APPLICATION SPEC		
		WEIGHT	0	
		CUSTOMER DRAWING		
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		
		0 PLC	± -	
		1 PLC	± -	
		2 PLC	± -	
		3 PLC	± -	
		4 PLC	± -	
MATERIAL		FINISH		
		SIZE	CAGE CODE	DRAWING NO
		A3	00779	C=1721874
		RESTRICTED TO		
		SCALE	SHEET	REV
		5:1	2 OF 2	E2