




.XXX ±0.05

RIC



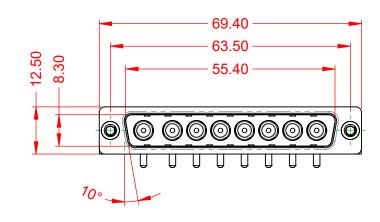




NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:


WITHSTANDING VOLTAGE:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, TIN PLATED COPPER ALLOY, GOLD FLASH PLATED



OPEF	RATING TEMPERATURE:	-55°C ~ 125°C
	ER/CO-AX CONTACT RATING: RESENT)	10A (CURRENT)
	AL CONTACT CURRENT RATING: AL CONTACT RESISTANCE:	5A PER CONTACT 10mΩ MAX.
	LATOR RESISTANCE: ECTRIC	$5000M\Omega$ min.

1000V AC rms



	COMBINATION D-SUB		SW REFERENCE NO.: 629 COMBO ASSEMBLY		
			DRAWN: C.B	DATE: JAN. 01/20	19
			CHECKED:	DATE:	
0	EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2
ES CY.		MANUFACTURE OR SALE OF APPARATUS	DRAWING NUMBER: 629-8W8-250-114		ISSUE
			PART NUMBER: 629-8W8	-250-1T4	1



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY

