

EVAL_AUDAMP25

MA5332 evaluation board



Get exclusive information
Register product

About this document

Scope and purpose

The EVAL_AUDAMP25 MA5332 evaluation board is a dual-channel, 200 W/ch (4 Ω at ±36.5 V; with heatsink) half-bridge class D audio power amplifier for Hi-Fi audio systems. This evaluation board demonstrates how to use the MA5332 IC, implement protection circuits, and design an optimum PCB layout using an Infineon integrated class D IC. This reference design does not require additional heatsink or fan cooling for normal operation (one-eighth of continuous rated power). The reference design provides all the required housekeeping power supplies for ease of use. The dual-channel design is scalable for power and the number of channels.

Applications

- AV receivers
- Home theater systems
- Mini component stereos
- Powered speakers
- Sub-woofers
- Musical instrument amplifiers
- Car audio amplifiers

Features

- Output power:
 - 200 W x 2 channels (10 percent THD+N, 4 Ω at ±36.5 V)
- Multiple protection features:
 - Overcurrent protection (OCP), high-side and low-side
 - Overvoltage protection (OVP)
 - Undervoltage protection (UVP), high-side and low-side
 - DC protection (DCP)
 - Overtemperature protection (OTP)
- Pulse width modulator (PWM):
 - Self-oscillating half-bridge topology with optional clock synchronization

Table of contents

| | |
|---|-----------|
| About this document | 1 |
| Table of contents | 2 |
| 1 Specifications | 3 |
| 2 EVAL_AUDAMP25 overview | 4 |
| 3 Setup guide | 5 |
| 3.1 Typical connections | 5 |
| 4 Audio analyzer setup | 6 |
| 5 Operating the evaluation board | 7 |
| 5.1 Test setup | 7 |
| 5.2 Power-up sequence..... | 7 |
| 5.3 Audio functionality tests | 7 |
| 5.4 External clock function | 7 |
| 5.5 Power-down sequence | 7 |
| 6 Audio performance | 8 |
| 6.1 Power vs. THD+N | 8 |
| 6.2 Frequency response | 8 |
| 6.3 Noise floor..... | 9 |
| 6.4 Noise floor with 1 V _{RMS} output | 9 |
| 7 Efficiency | 10 |
| 8 Thermal information | 11 |
| 8.1 Peak power duration thermal information | 11 |
| 8.2 Heatsink installation | 14 |
| 9 Schematic | 15 |
| 10 PCB | 19 |
| 10.1 PCB specifications..... | 19 |
| 10.2 PCB layout | 20 |
| 11 Bill of materials (BOM) | 23 |
| Revision history | 29 |

1 Specifications

Table 1 General test conditions

| Condition | | Notes/conditions |
|----------------------------|--|---|
| Supply voltages | $\pm 22 \text{ V} \sim \pm 40 \text{ V}$ | Bipolar power supply |
| Rated load impedance | 2Ω to 6Ω | Resistive load |
| Self-oscillating frequency | 400 kHz | No input signal, adjustable |
| Voltage gain | 28 dB | 1 V_{RMS} input yields rated power |

Table 2 Electrical data

| Data | Typical | Notes/conditions |
|---|---|--|
| Infineon devices | MA5332 integrated class D IC | |
| Modulator | Self-oscillating, second-order sigma-delta modulation, analog input | |
| Output power CH1 to 2: (1 percent THD+N) | 150 W | 1 kHz, $RL = 4 \Omega$ |
| Output power CH1 to 2: (10 percent THD+N) | 200 W | 1 kHz, $RL = 4 \Omega$ |
| Rated load impedance | 2Ω to 6Ω | Resistive load |
| Idling supply current | +55 mA | No input signal $\pm 36.5 \text{ V}$ |
| | -80 mA | |
| Residual noise | 170 μV | Filter: A-weighting (12017), 20 kHz SPCL Gain setting: 28 dB |
| Channel efficiency | 96 percent | Single-channel driven, 200 W, class D stage |

2 EVAL_AUDAMP25 overview

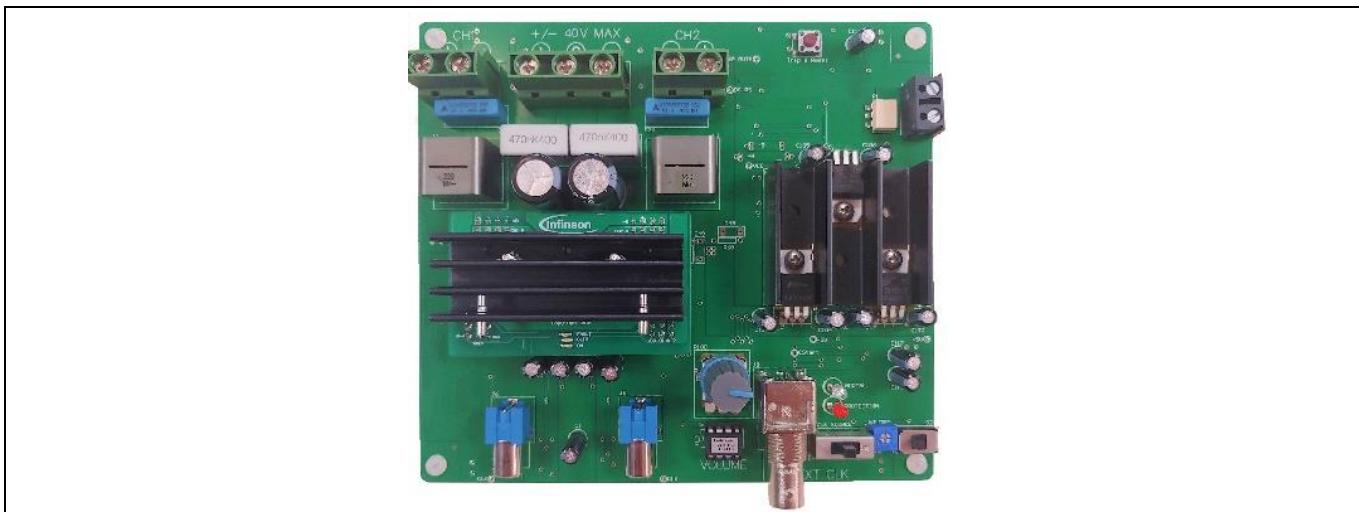


Figure 1 EVAL_AUDAMP25 board

The EVAL_AUDAMP25 features a dual-channel self-oscillating type PWM for the lowest component count, highest performance and robust design. This topology represents an analog version of a second-order sigma-delta modulation, having a class D switching stage inside the loop. The benefit of the sigma-delta modulation, in comparison to the carrier-signal based modulation, is that all the error in the audible frequency range is shifted to the inaudible upper-frequency range by nature of its operation. Also, sigma-delta modulation enables the designer to apply sufficient error correction.

The EVAL_AUDAMP25 self-oscillating topology consists of the following essential functional blocks:

- Front-end integrator
- PWM comparator
- Level shifters
- Integrated gate drivers and MOSFETs
- Output LPF

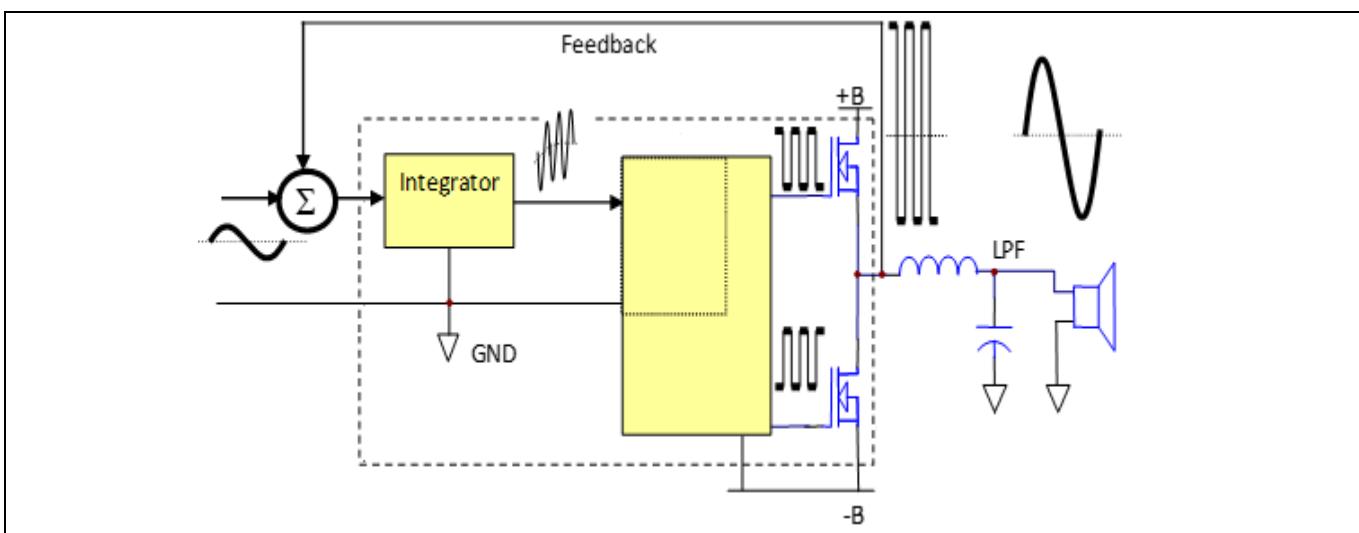


Figure 2 Simplified block diagram of class D amplifier

3 Setup guide

3.1 Typical connections

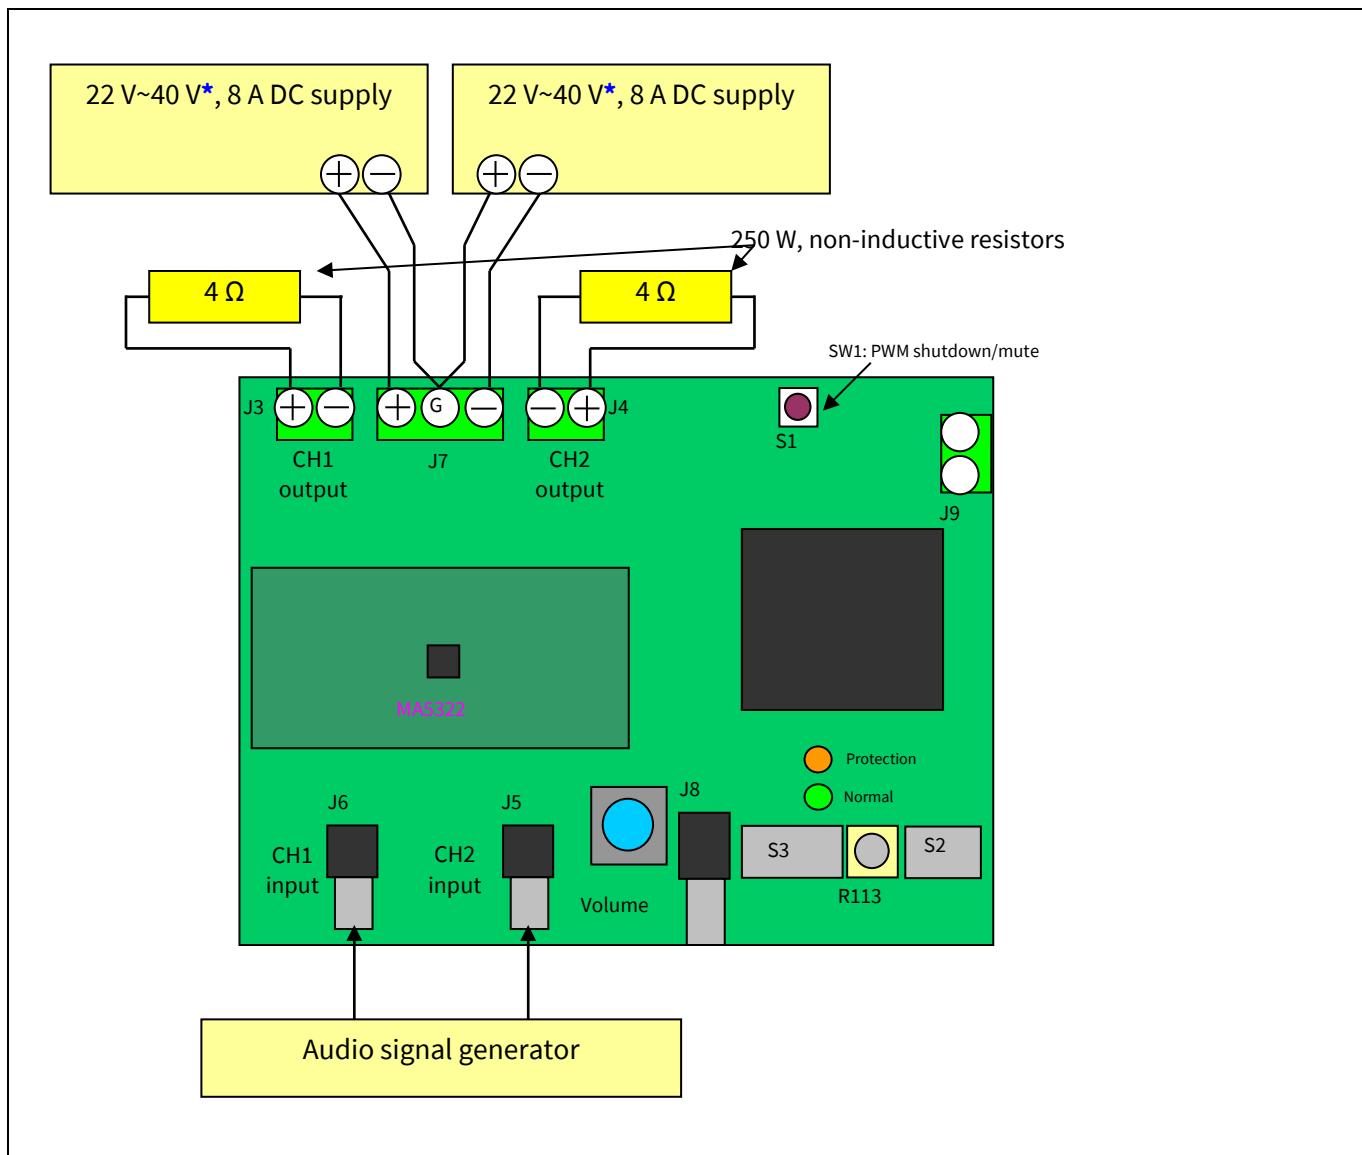


Figure 3 Typical connectors

Table 3 Connector descriptions

| | | |
|---------|----|--------------------------------------|
| CH1 IN | J6 | Analog input for CH1 |
| CH2 IN | J5 | Analog input for CH2 |
| POWER | J7 | Positive and negative supply (+B/-B) |
| CH1 OUT | J3 | Output for CH1 |
| CH2 OUT | J4 | Output for CH2 |
| EXT CLK | J8 | External clock sync |
| DCP OUT | J9 | DC protection relay output |

4 Audio analyzer setup

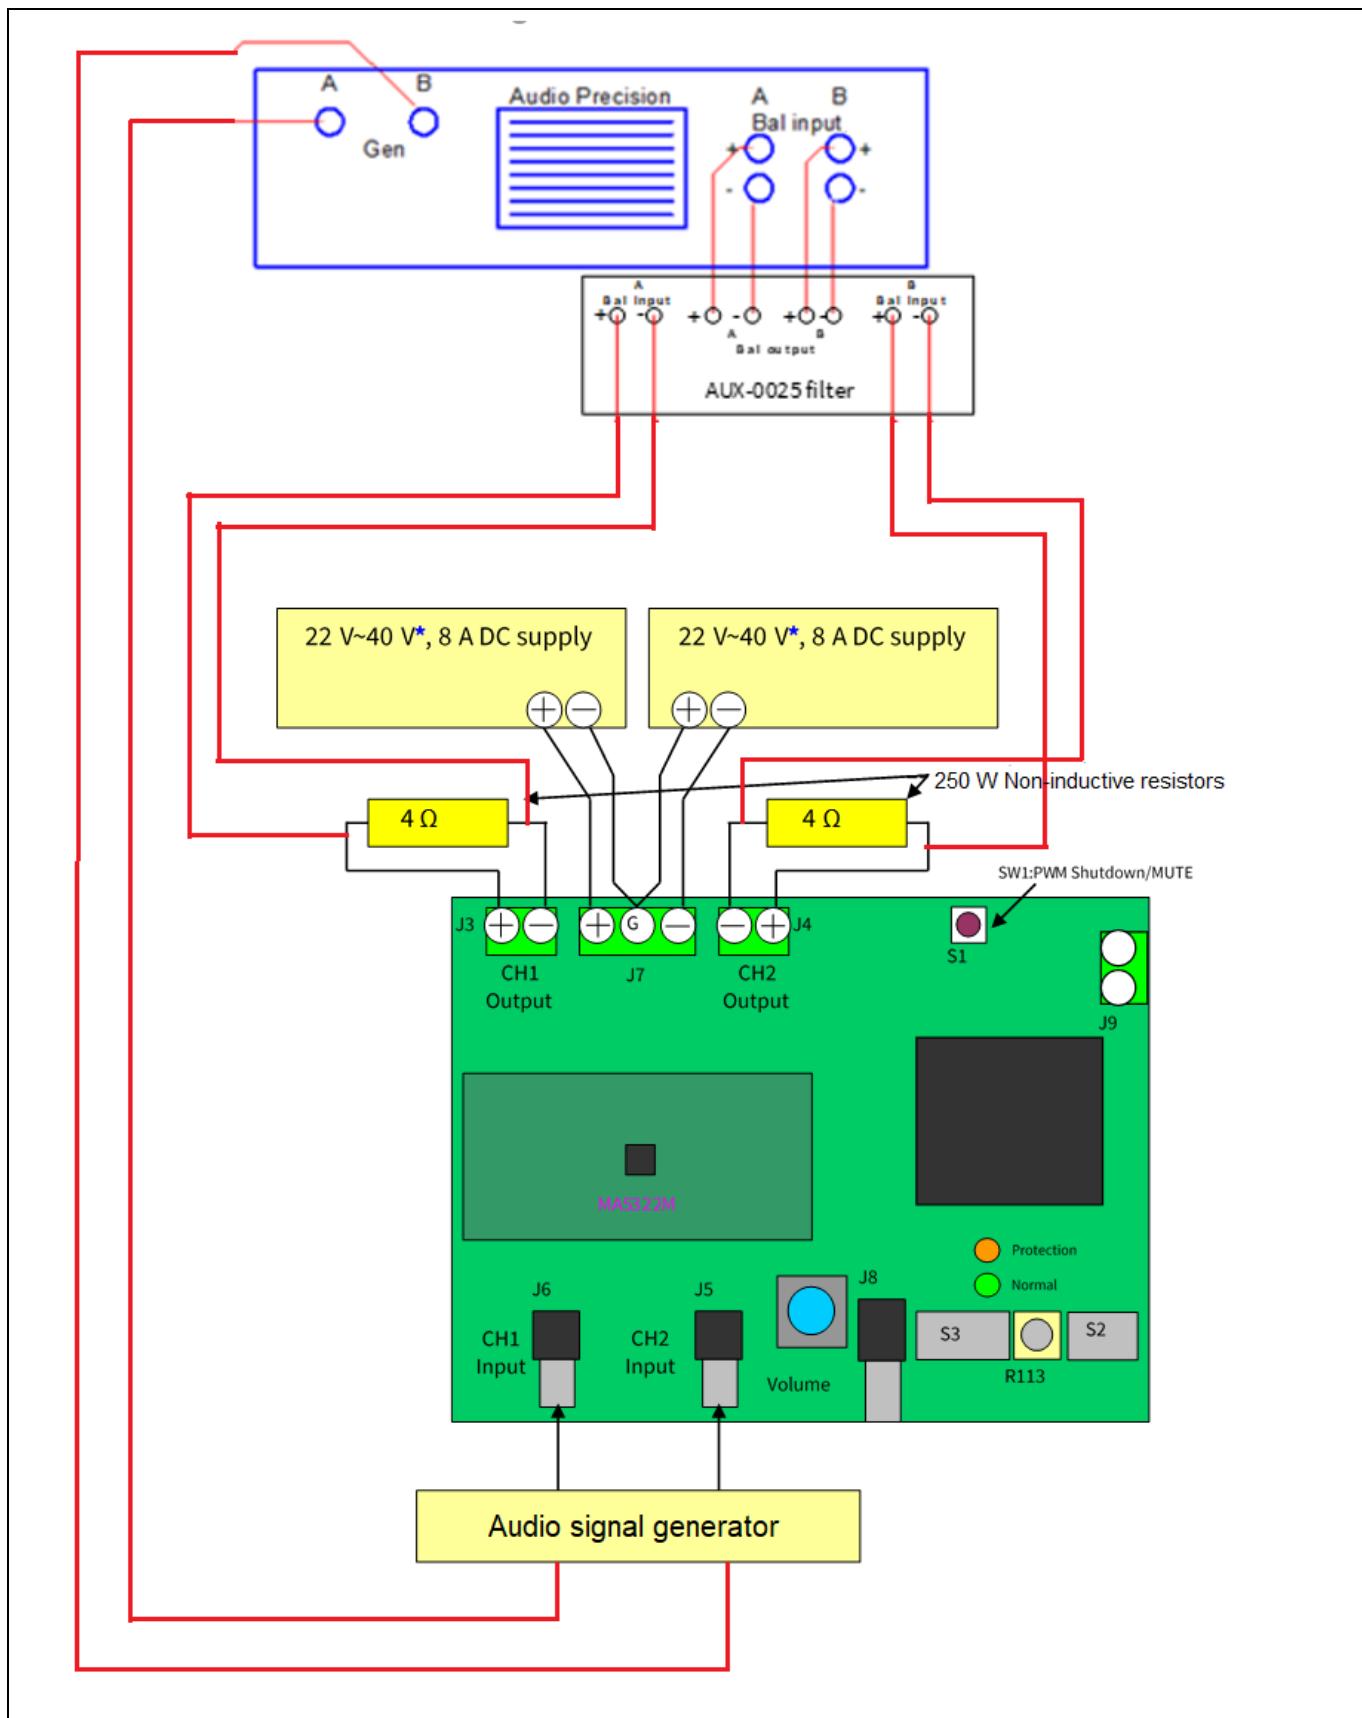


Figure 4 Audio analyzer connections

5 Operating the evaluation board

5.1 Test setup

1. Connect $4\ \Omega$ 250 W dummy loads to output connectors (J3 and J4, as shown in [Figure 3](#)) and parallel it with the input of the audio precision (AP) analyzer.
2. Connect the audio signal generator (ASG) to J6 and J5 for CH1 and CH2 respectively (AP).
3. Set up the dual power supply with voltages of ± 36.5 V; set current limit to 8 A.
4. Turn off the dual power supply before connecting to “on” of the unit under test (UUT).
5. Set switch S1 to the middle position (self-oscillating).
6. Set volume level knob R108 fully counter-clockwise (minimum volume).
7. Connect the dual power supply to J7, as shown in [Figure 3](#) or [Figure 4](#).

5.2 Power-up sequence

8. Turn on the dual power supply. The $\pm B$ supplies must be applied and removed at the same time.
9. Red LED (protection) should turn on almost immediately and turn off after about 3 s.
10. Green LED (normal) then turns on after the red LED is extinguished and should stay on.
11. Quiescent current for the positive supply should be $55\text{ mA} \pm 10\text{ mA}$ at ± 36.5 V.
12. Quiescent current for the negative supply should be $80\text{ mA} \pm 10\text{ mA}$ at ± 36.5 V.
13. Push S3 switch (trip and reset push-button) to restart the sequence of LED indicators, which should be the same as noted above in steps 9 to 10.

5.3 Audio functionality tests

1. With AP no filter (more than 500 kHz), monitor the channel’s switching frequency on the AP’s analog analyzer.
2. Set S1 to “self” (self-oscillating) position.
3. Set the AP’s analog analyzer to 20 kHz AES17 filter.
4. Connect the audio signal from the AP to J6 and J5.
5. Apply 1 V_{RMS} at 1 kHz sinusoidal signal from the ASG.
6. Turn control volume up (R108 clockwise) to obtain an output reading of 150 W ($4\ \Omega$ load).
7. Sweep the audio signal voltage from $15\text{ mV}_{\text{RMS}}$ to $1.5\text{ V}_{\text{RMS}}$.
8. Run the AP test as shown in Figures 5 to 12, below.

5.4 External clock function

1. With AP no filter (more than 500 kHz), monitor the channel’s switching frequency on the AP’s analog analyzer.
2. Set S1 to “self” (self-oscillating) position.
3. Set S1 to “ext” (external clock) position to enable the onboard clock oscillator.
4. Connect the external clock signal generator output to J8.
5. Set the AP’s analog analyzer to 20 kHz AES17 filter.
6. Connect the audio signal from the AP to J6 and J5.
7. Sweep the audio signal voltage from $15\text{ mV}_{\text{RMS}}$ to $1.5\text{ V}_{\text{RMS}}$.

5.5 Power-down sequence

14. Turn off \pm power supply at the same time.
15. All LEDs turn off when the housekeeping power supplies are off.

6 Audio performance

6.1 Power vs. THD+N

Test conditions:

$$V_{bus} = \pm 36.5 \text{ V}$$

Input signal = 1 kHz

Load impedance = 4 Ω

$$F_{PWM} = 400 \text{ kHz}$$

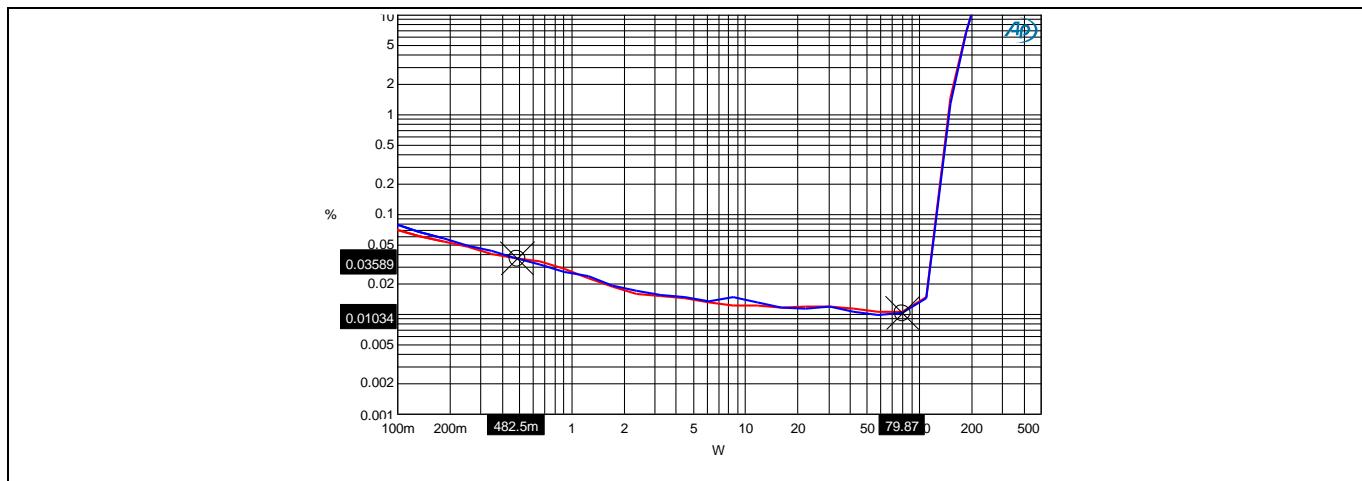


Figure 5 Power vs. THD+N 4 Ω load

6.2 Frequency response

Test conditions:

$$V_{bus} = \pm 36.5 \text{ V}$$

Output power = 1 W

Load impedance = 4 Ω

$$F_{PWM} = 400 \text{ kHz}$$

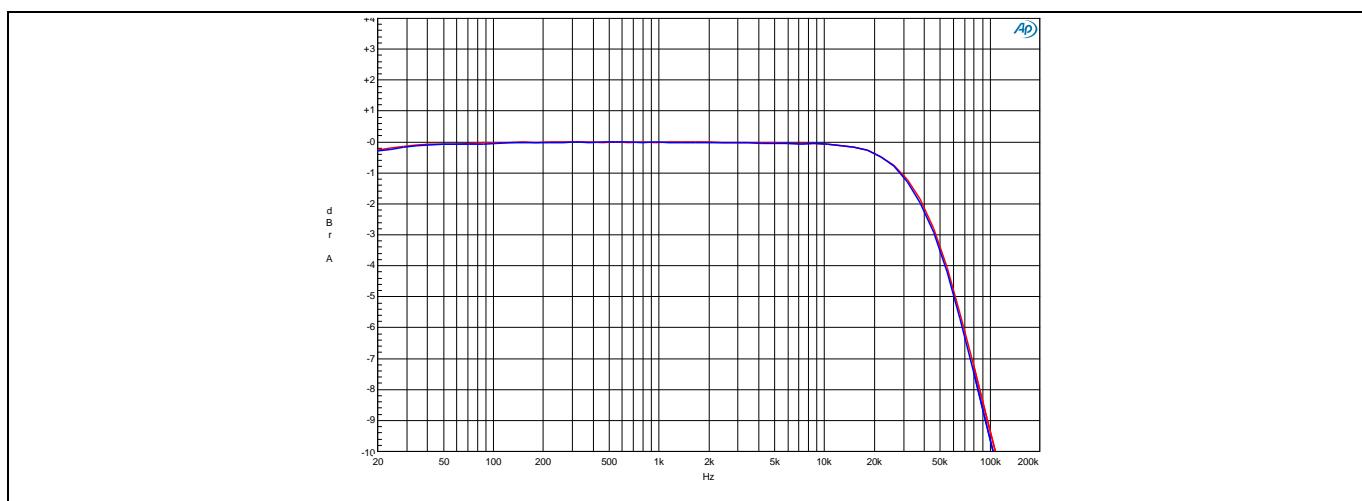


Figure 6 Frequency response 4 Ω load

EVAL_AUDAMP25

MA5332 evaluation board

Audio performance

6.3 Noise floor

Test conditions:

$$V_{bus} = \pm 36.5 \text{ V}$$

No input signal

Load impedance = 4Ω

$$F_{PWM} = 400 \text{ kHz}$$

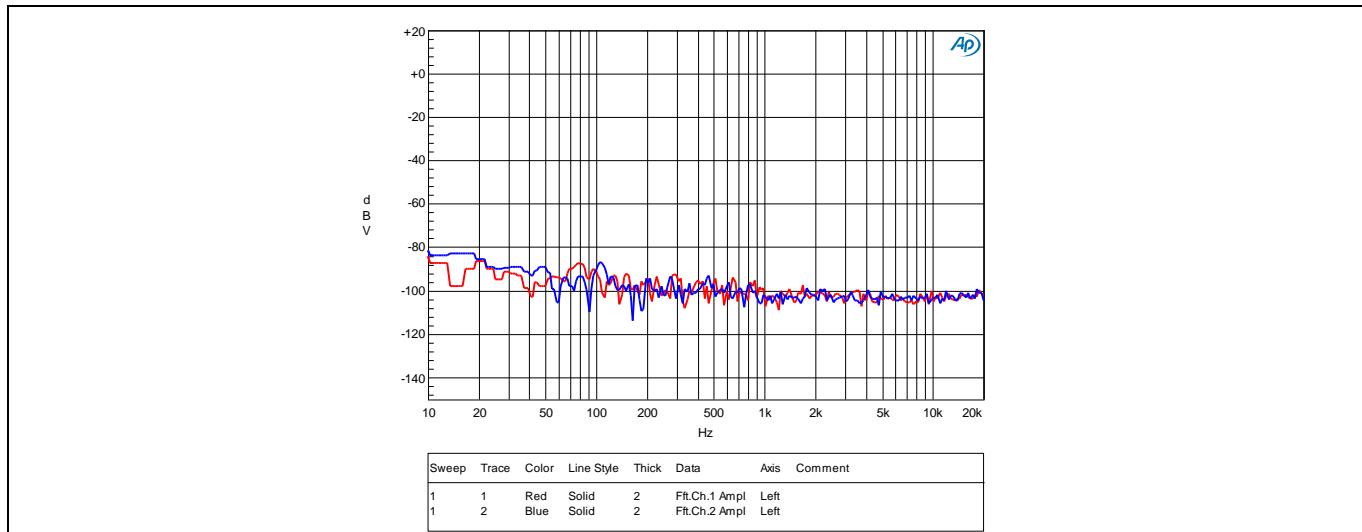


Figure 7 **Noise floor 4Ω load**

6.4 Noise floor with 1 V_{RMS} output

Test conditions:

$$V_{bus} = \pm 36.5 \text{ V}$$

Output = 1 V_{RMS} at 1 kHz

Load impedance = 4Ω

$$F_{PWM} = 400 \text{ kHz}$$

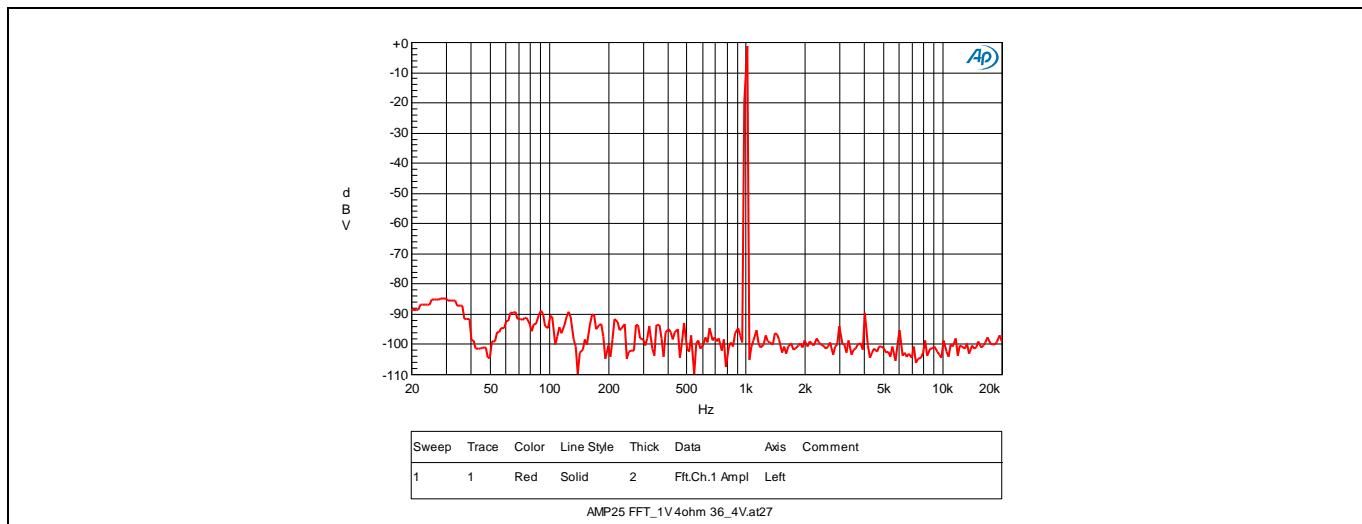


Figure 8 **Noise floor with 1 V_{RMS} output 4Ω load**

7 Efficiency

Test conditions:

$$V_{\text{bus}} = \pm 36.5 \text{ V}$$

$$\text{Output} = 1 \text{ V}_{\text{RMS}} \text{ at } 1 \text{ kHz}$$

$$\text{Load impedance} = 4 \Omega$$

$$F_{\text{PWM}} = 400 \text{ kHz}$$

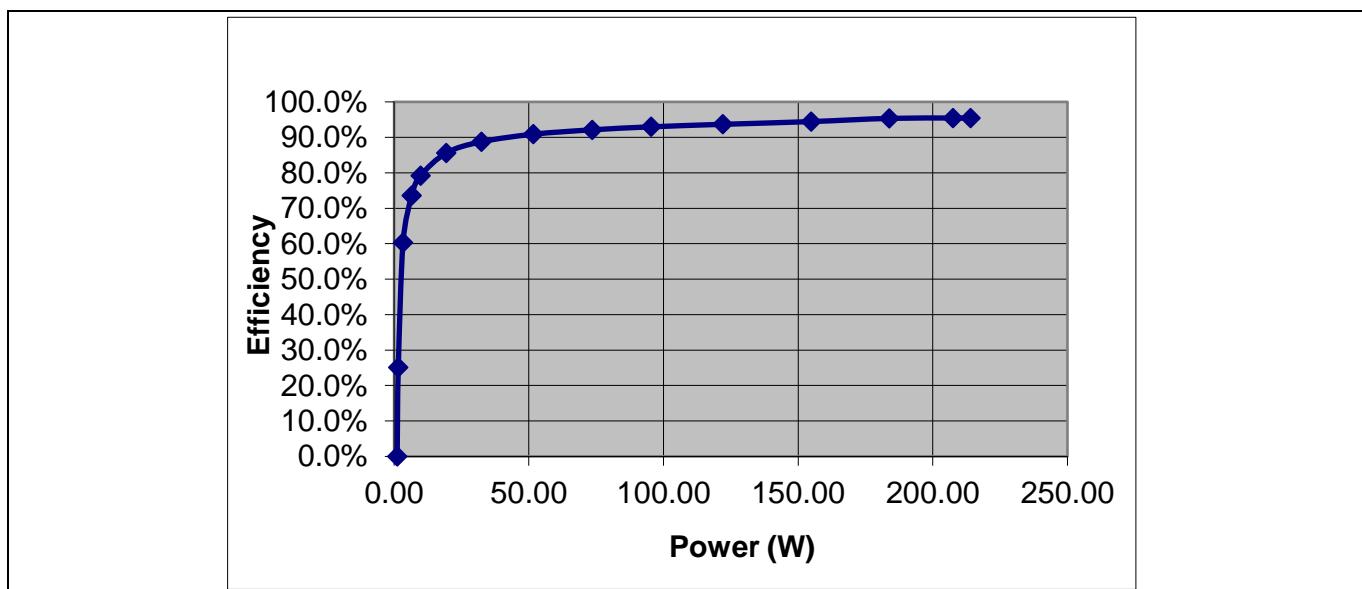


Figure 9 EVAL_AUDAMP25 4 Ω load stereo, ±B supply = ±36.5 V

8 Thermal information

8.1 Peak power duration thermal information

Test conditions:

Input signal = 1 kHz

Both channels driven

F_{PWM} = 400 kHz

Table 4 Peak power with heatsink

| Load (Ω) | $\pm V_{bus}$ (V) | 10 percent THD+N power (W) | Duration |
|-------------------|-------------------|----------------------------|--|
| 6 | 40 | 160 | More than 1 minute no thermal shutdown |
| 4 | 36.5 | 200 | |
| 3 | 31.5 | 190 | |
| 2 | 23 | 150 | |

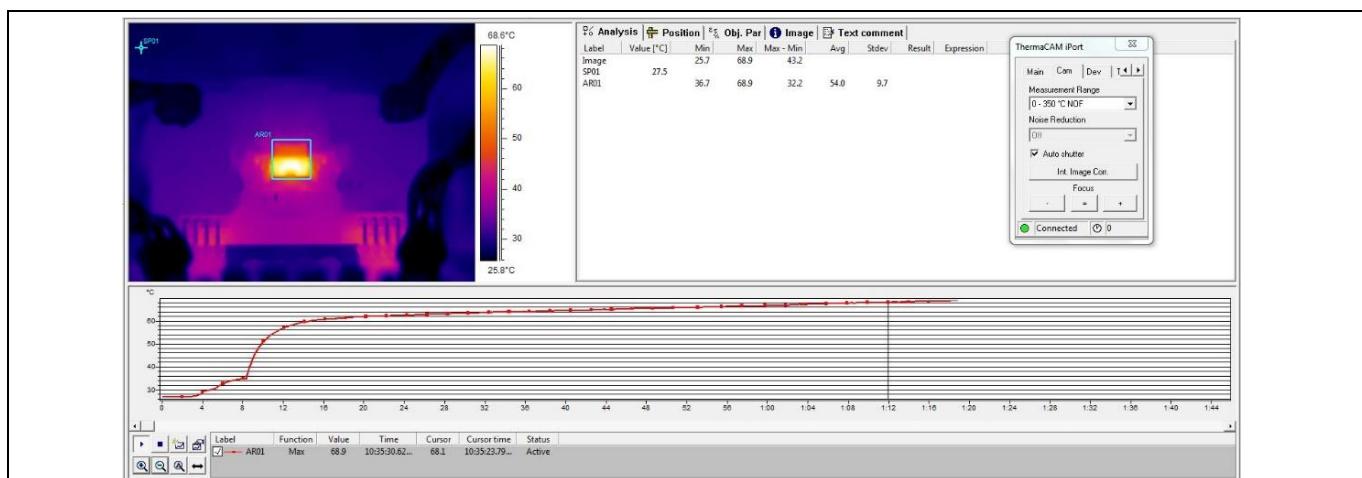


Figure 10 Peak power $P_{out} = 164$ W with 6Ω load ± 40 V

Note: Maximum temperature 68.9°C at 1 minute.

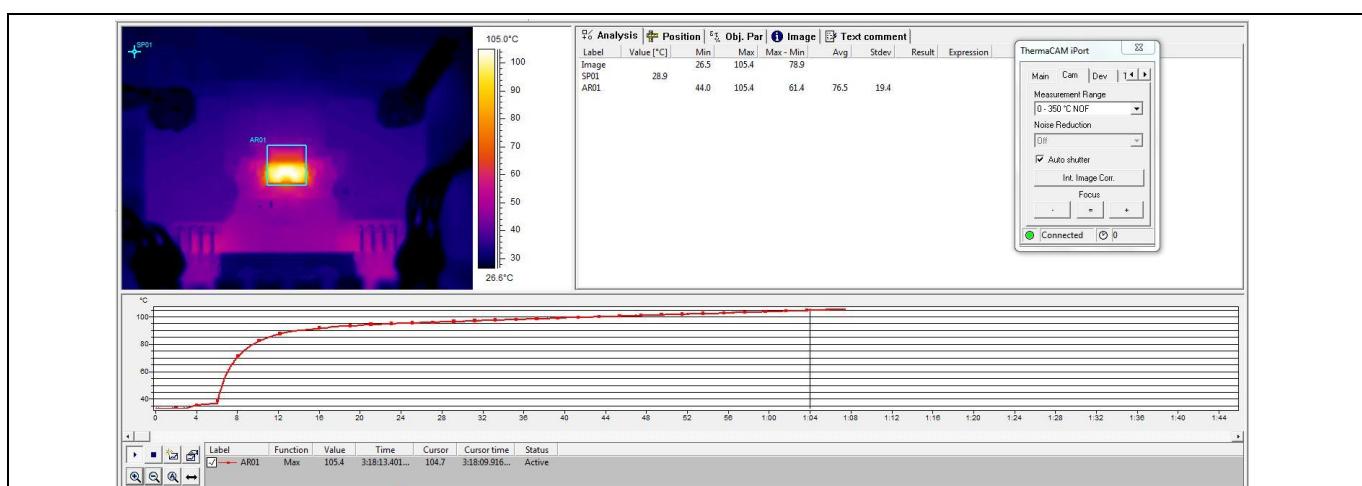
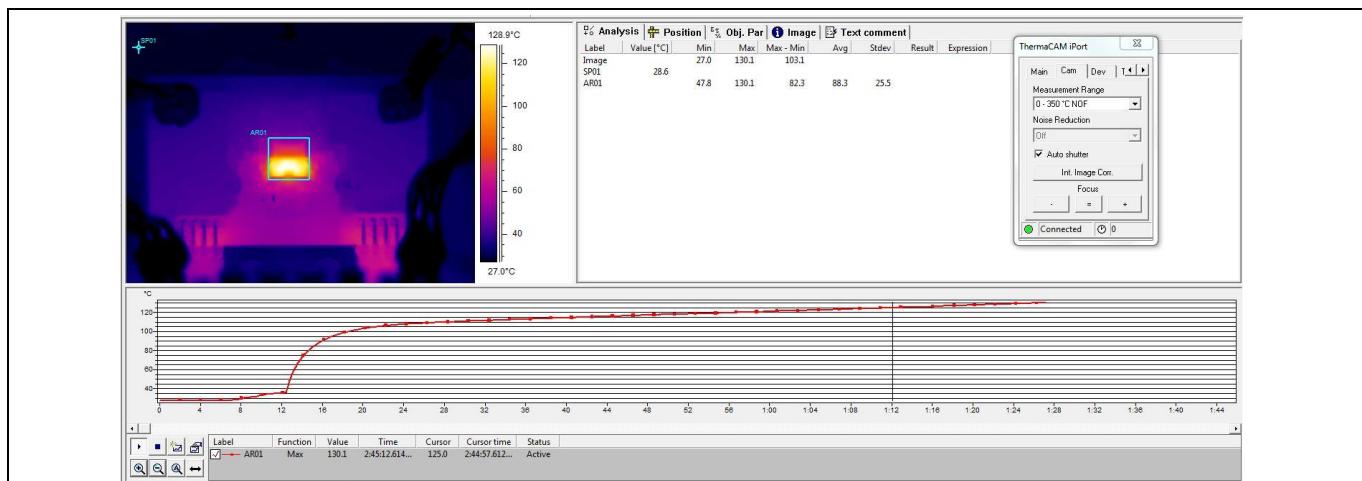
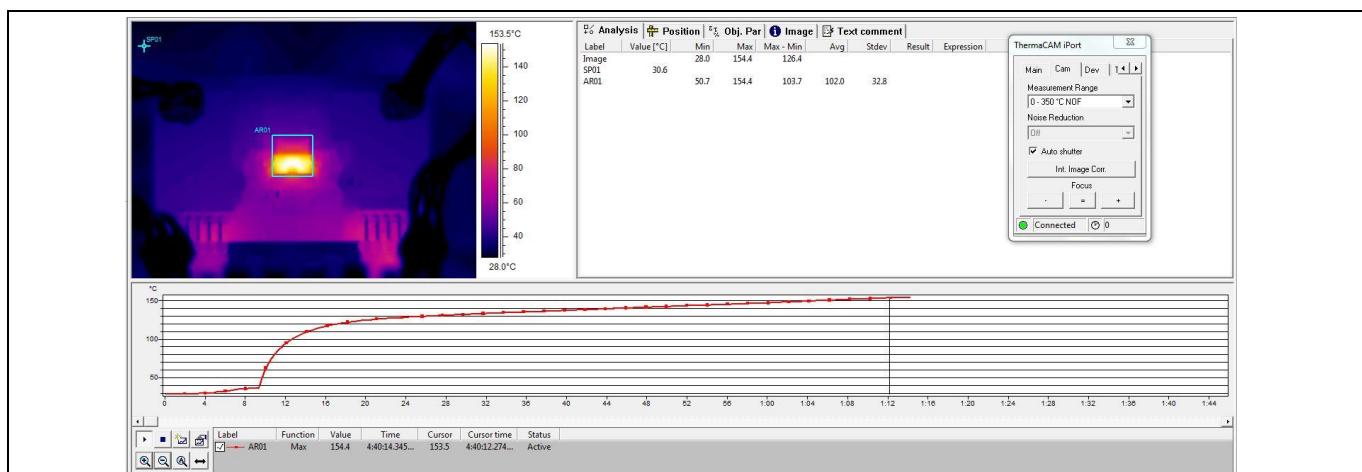


Figure 11 Peak power $P_{out} = 200$ W with 4Ω load ± 36.5 V

Note: Maximum temperature 105°C at 1 minute.

**Figure 12 Peak power $P_{out} = 194 \text{ W}$ with 3Ω load $\pm 31.5 \text{ V}$**

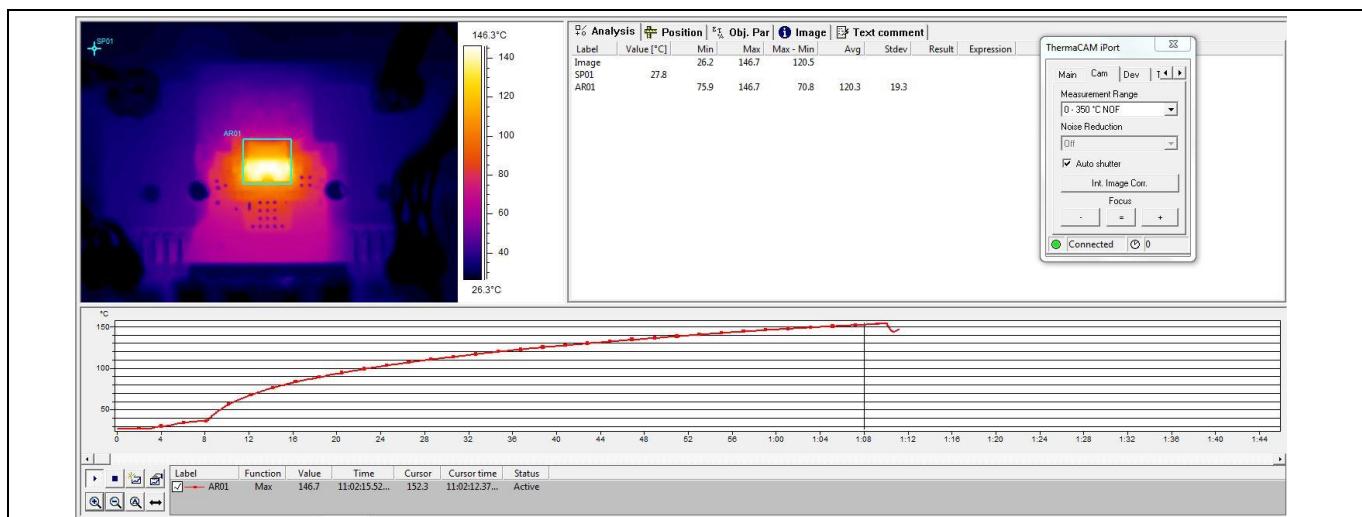
Note: Maximum temperature 130°C at 1 minute.

**Figure 13 Peak power $P_{out} = 150 \text{ W}$ with 2Ω load $\pm 23 \text{ V}$**

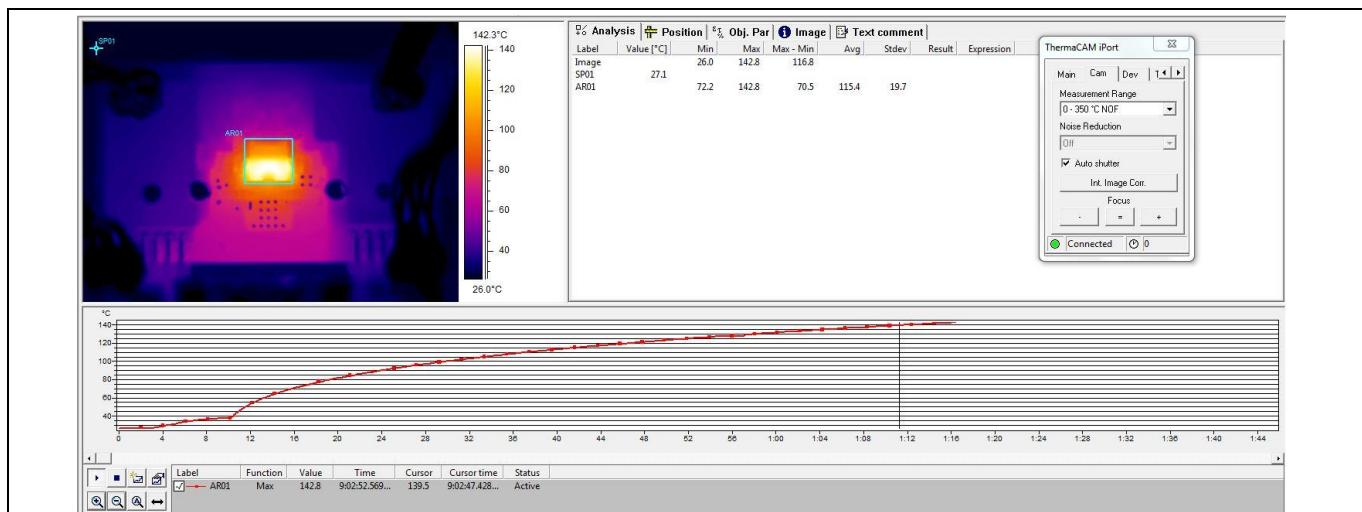
Note: Maximum temperature 154°C at 1 minute.

Table 5 Peak power without heatsink

| Load (Ω) | $\pm V_{bus}$ (V) | 10 percent THD+N power (W) | Duration |
|-------------------|-------------------|----------------------------|--|
| 4 | 26.5 | 100 | More than 1 minute no thermal shutdown |
| 2 | 13.7 | 50 | |

**Figure 14 Peak power $P_{out} = 102 \text{ W}$ with 4Ω load $\pm 26.5 \text{ V}$**

Note: Maximum temperature 146.7°C at 1 minute.

**Figure 15 Peak power $P_{out} = 55 \text{ W}$ with 2Ω load $\pm 13.7 \text{ V}$**

Note: Maximum temperature 142.8°C at 1 minute.

Table 6 1/8 power test with heatsink

| Load (Ω) | $\pm V_{bus}$ (V) | Max. T-case ($^\circ\text{C}$) | 1/8 power (W) | Duration (minutes) |
|-----------------------------------|-------------------------------------|--|----------------------|---------------------------|
| 6 | 40 | 71.6 | 16.5 | 30 |
| 4 | 36.5 | 85.6 | 19.8 | 30 |
| 3 | 31.5 | 87.2 | 19.7 | 30 |
| 2 | 23 | 84.8 | 15 | 30 |

Table 7 1/8 power test without heatsink

| Load (Ω) | $\pm V_{bus}$ (V) | Max. T-case ($^\circ\text{C}$) | 1/8 power (W) | Duration (minutes) |
|-----------------------------------|-------------------------------------|--|----------------------|---------------------------|
| 4 | 22.7 | 84.6 | 7.12 | 30 |
| 2 | 13.7 | 76.1 | 4.88 | 30 |


8.2 Heatsink installation

Heatsink: V8818V


Thermal pad: BER161-ND




Figure 16 Heatsink installation

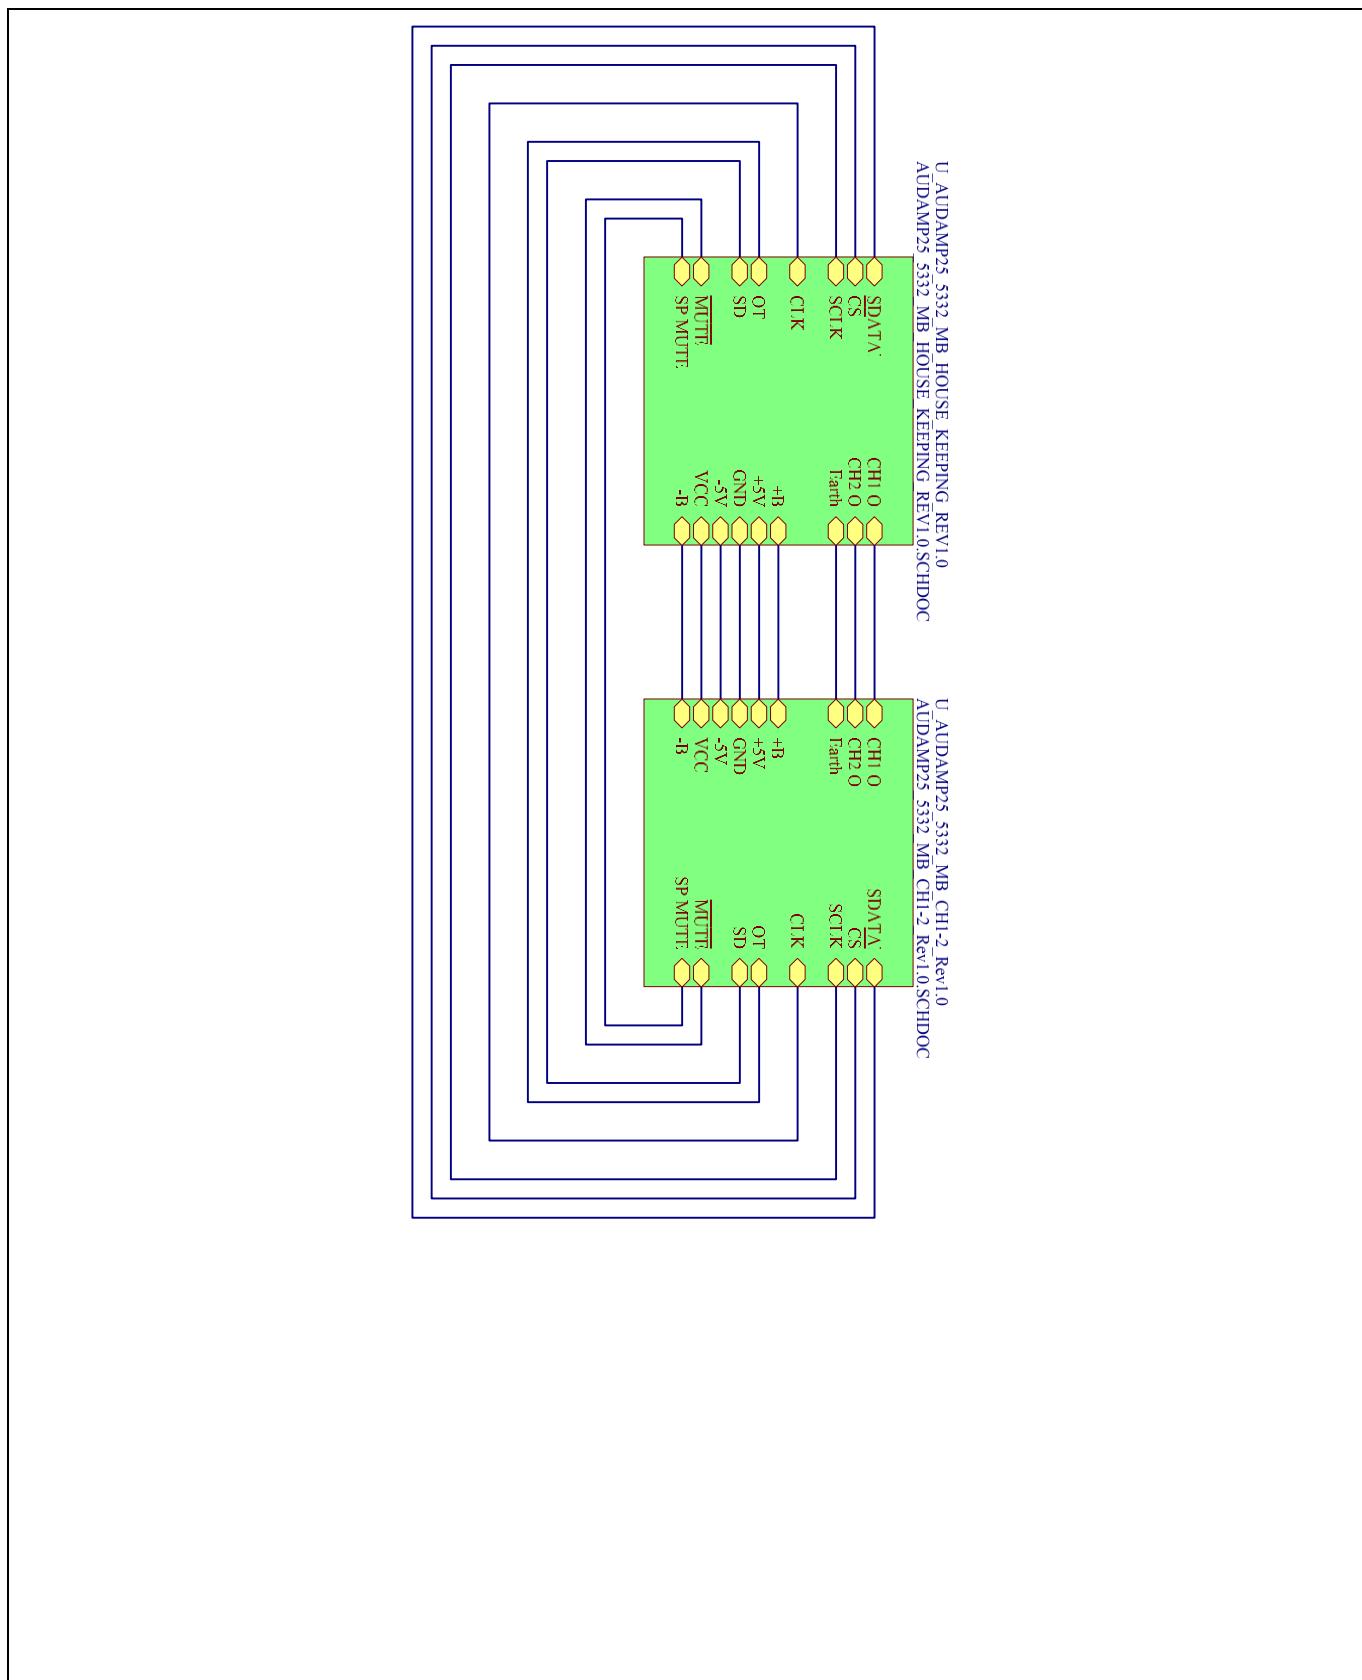9 Schematic**Figure 17 Motherboard schematic 1**

Class D, Mother Board Clock and House Keeping Schematic

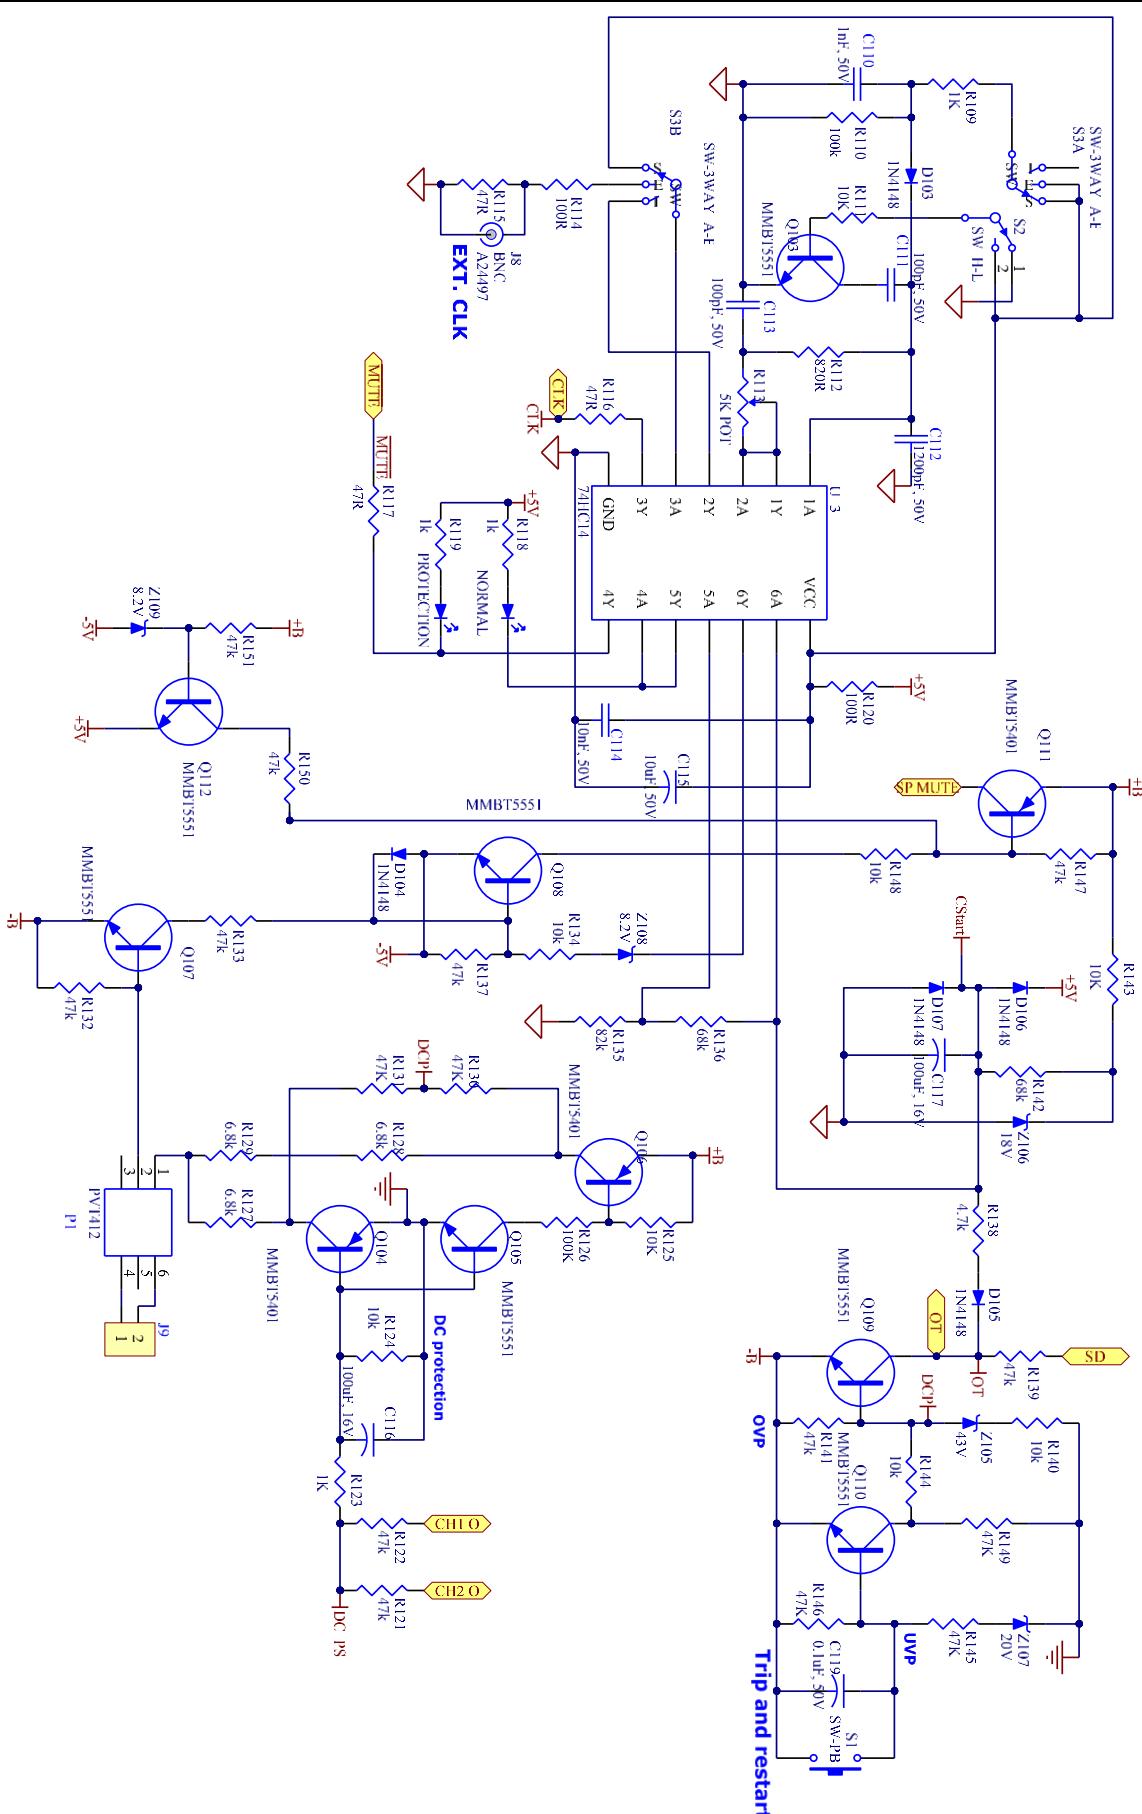

Figure 18 Motherboard schematic 2

Class D, Mother Board Control Volume and Power Supplies Schematic

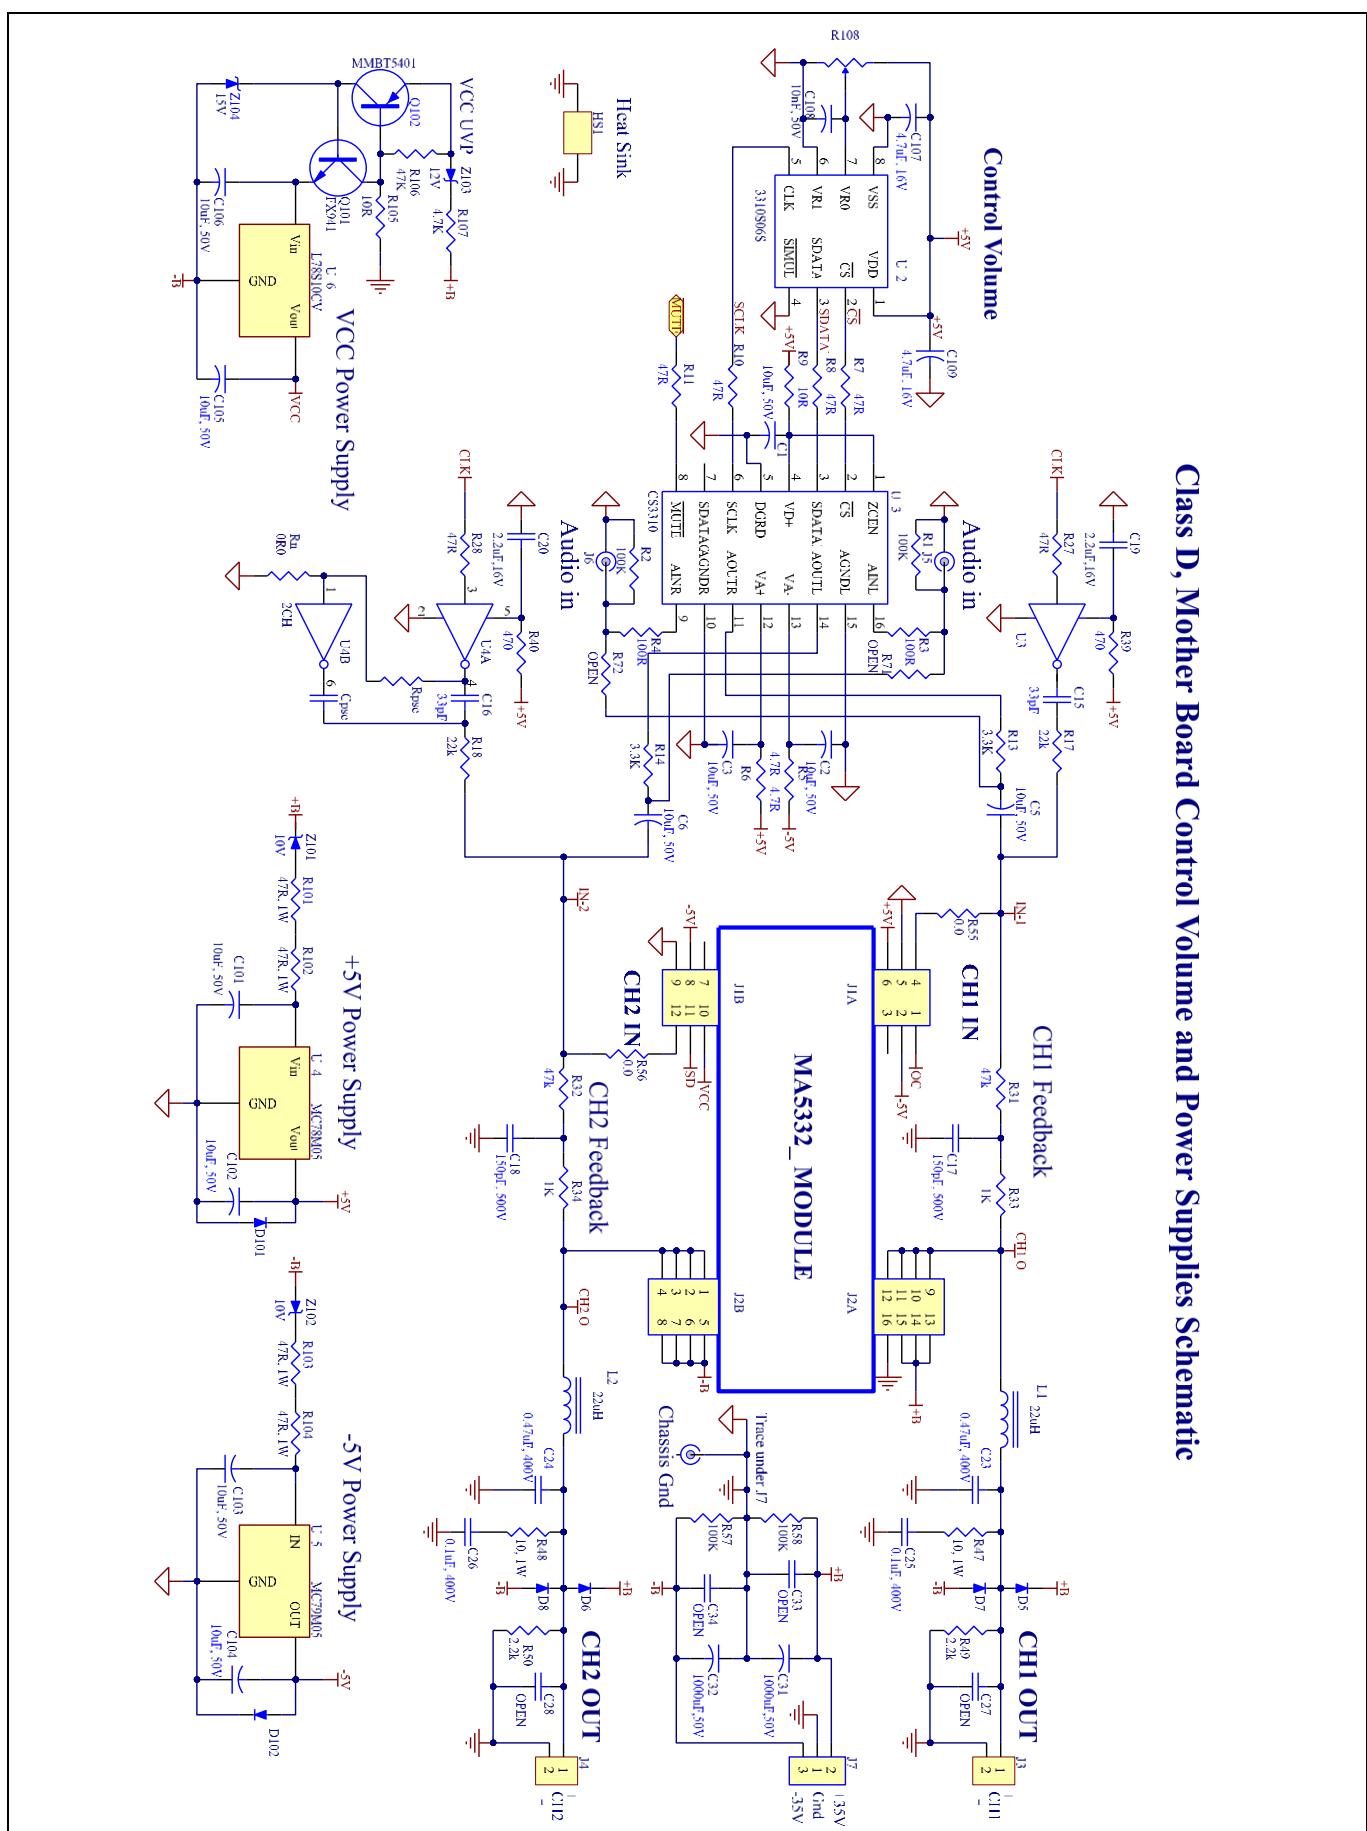
Figure 19 Motherboard schematic 3

Class D, Daughter Board MA53xx Module Schematic


AMP25 SCH_DB_53xxRev2.0

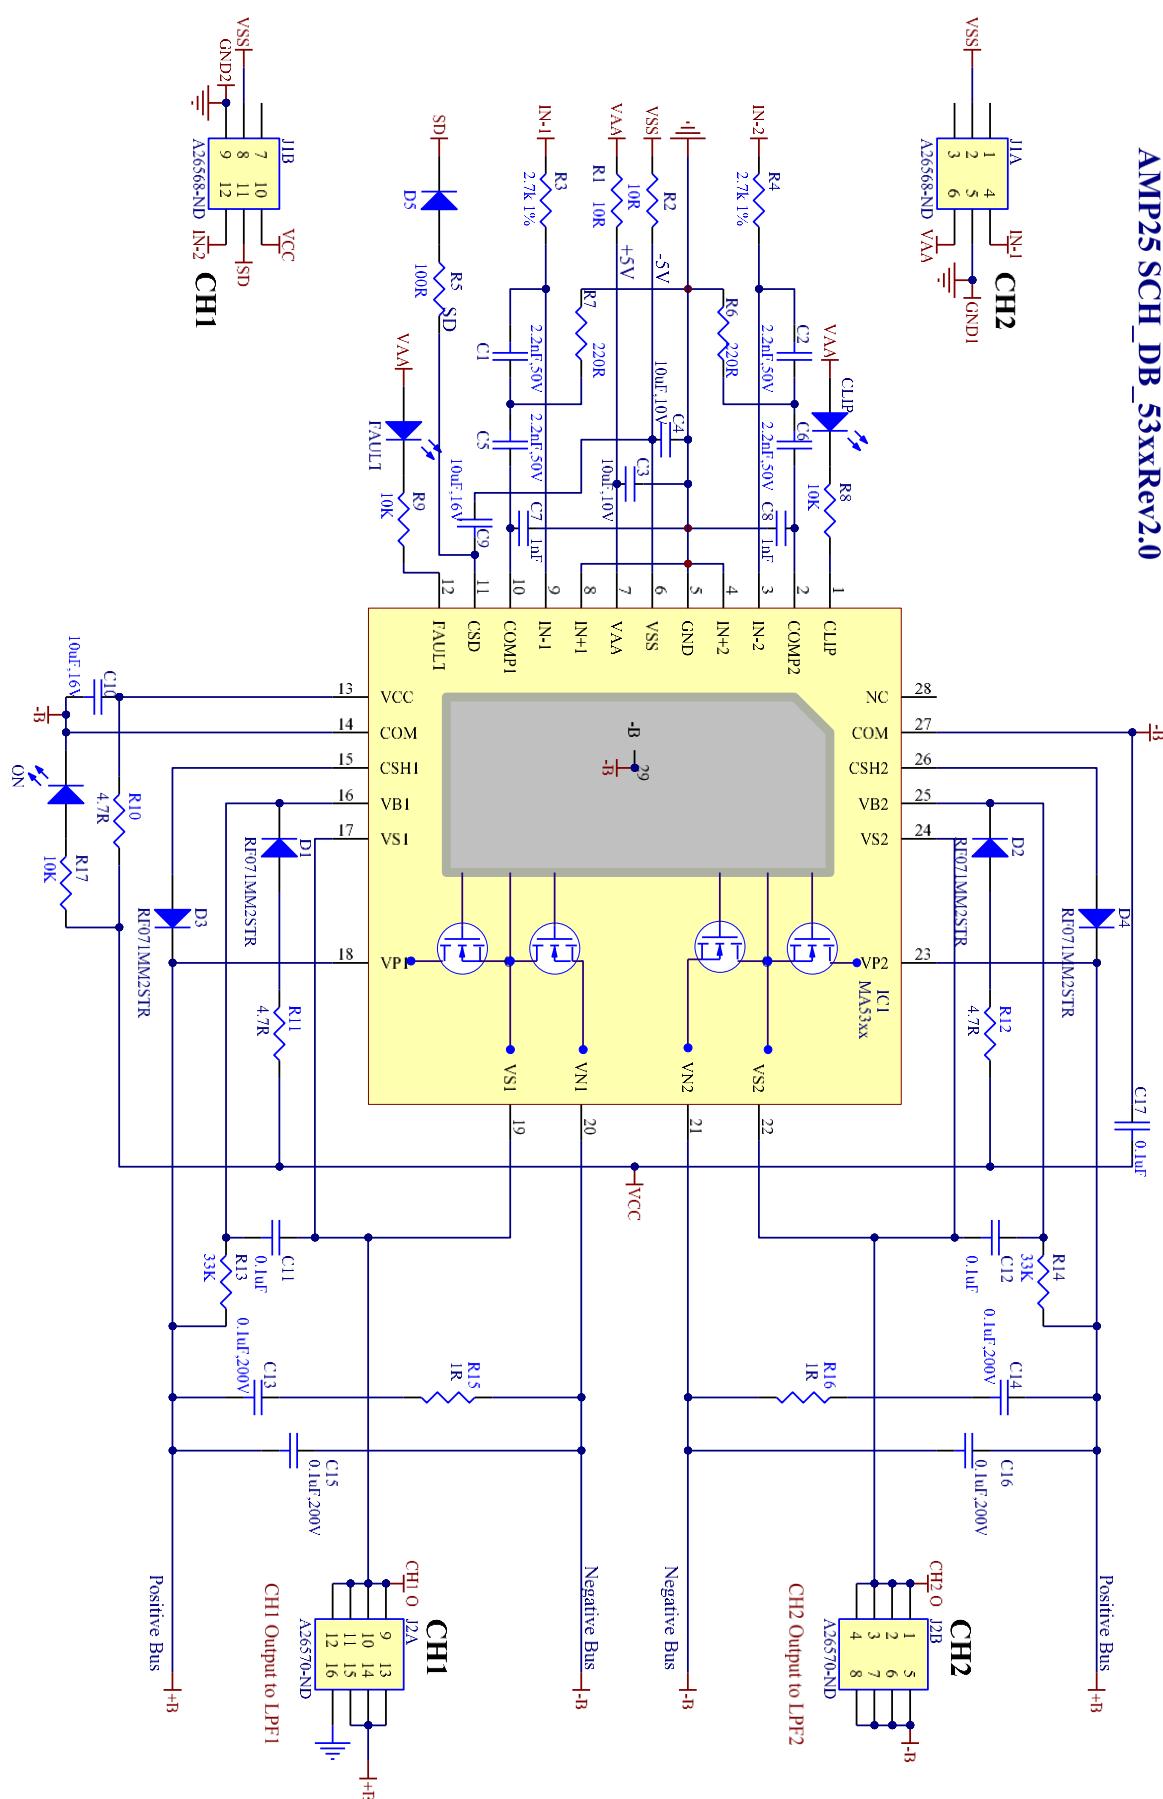




10 PCB

10.1 PCB specifications

- Two-layer SMT PCB with through-holes
- 1/16 thickness
- 2/0 oz. copper
- FR4 material
- 20 mil lines and spaces
- Solder mask to be green enamel EMP110 DBG (carapace) or Enthone endplate DSR-3241 or equivalent
- Silkscreen to be white epoxy non-conductive per IPC-RB 276 standard
- All exposed copper must be finished with tin-lead Sn 60 or 63 for 100 μ inches thick
- Tolerance of PCB size shall be 0.010 to 0.000 inches
- Tolerance of all holes is ± 0.003 inches
- PCB acceptance criteria as defined for class II PCB standards

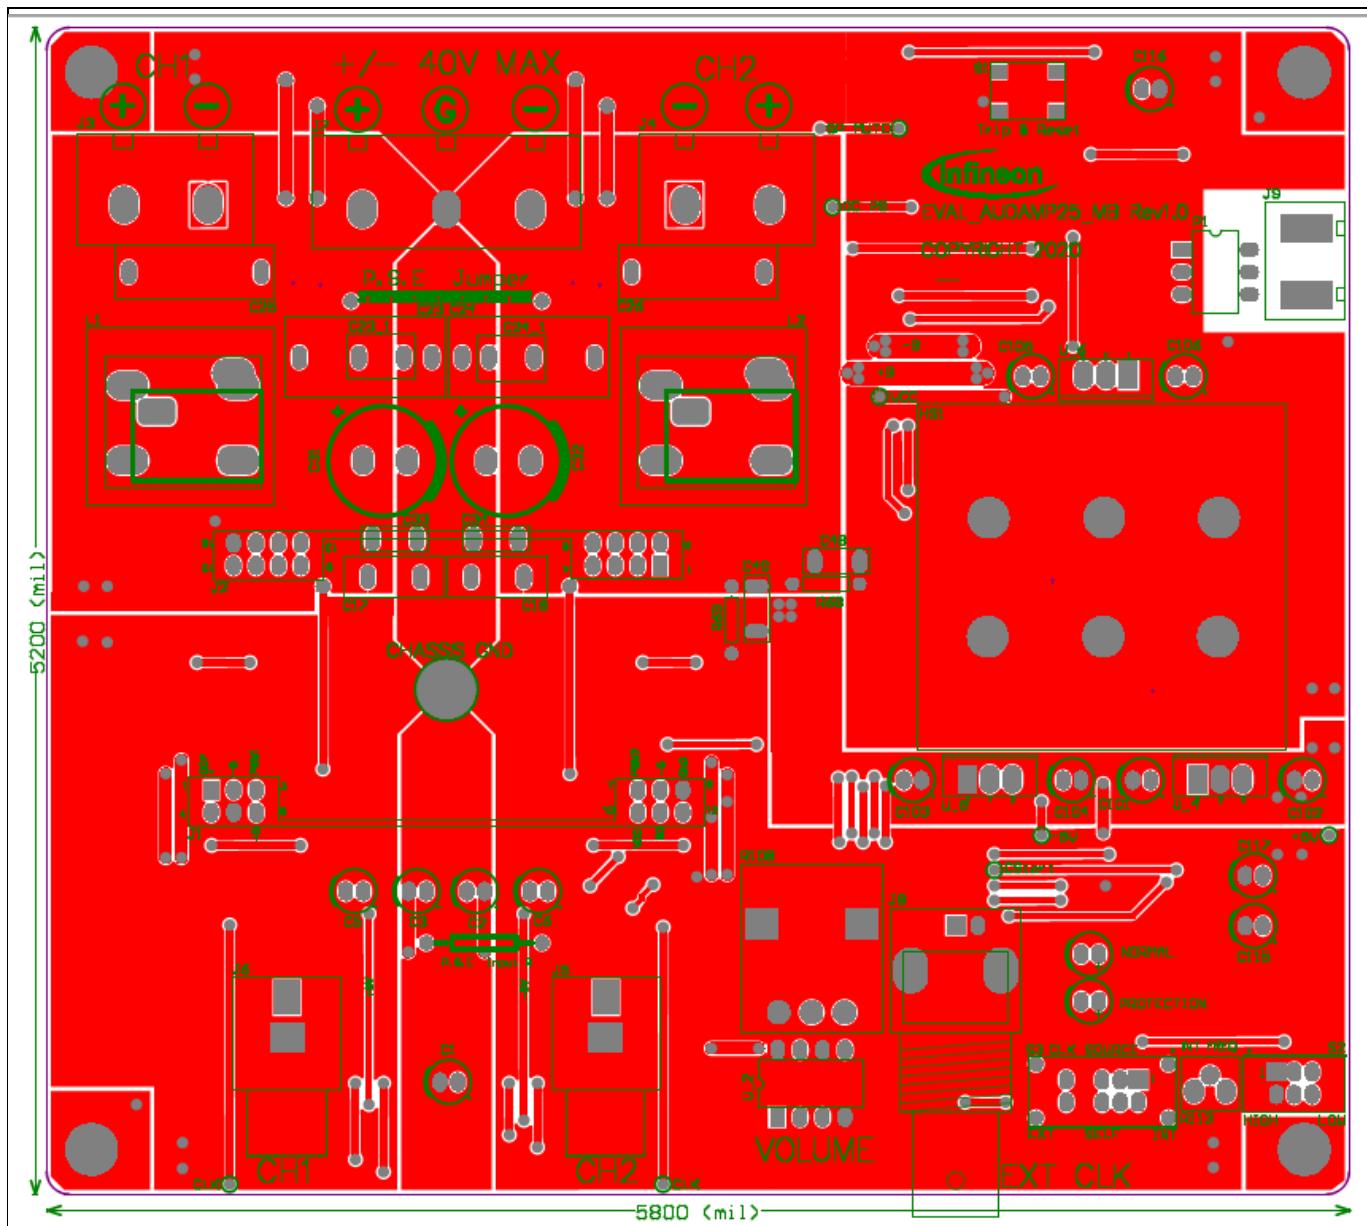10.2 PCB layout**Figure 21** Motherboard top view

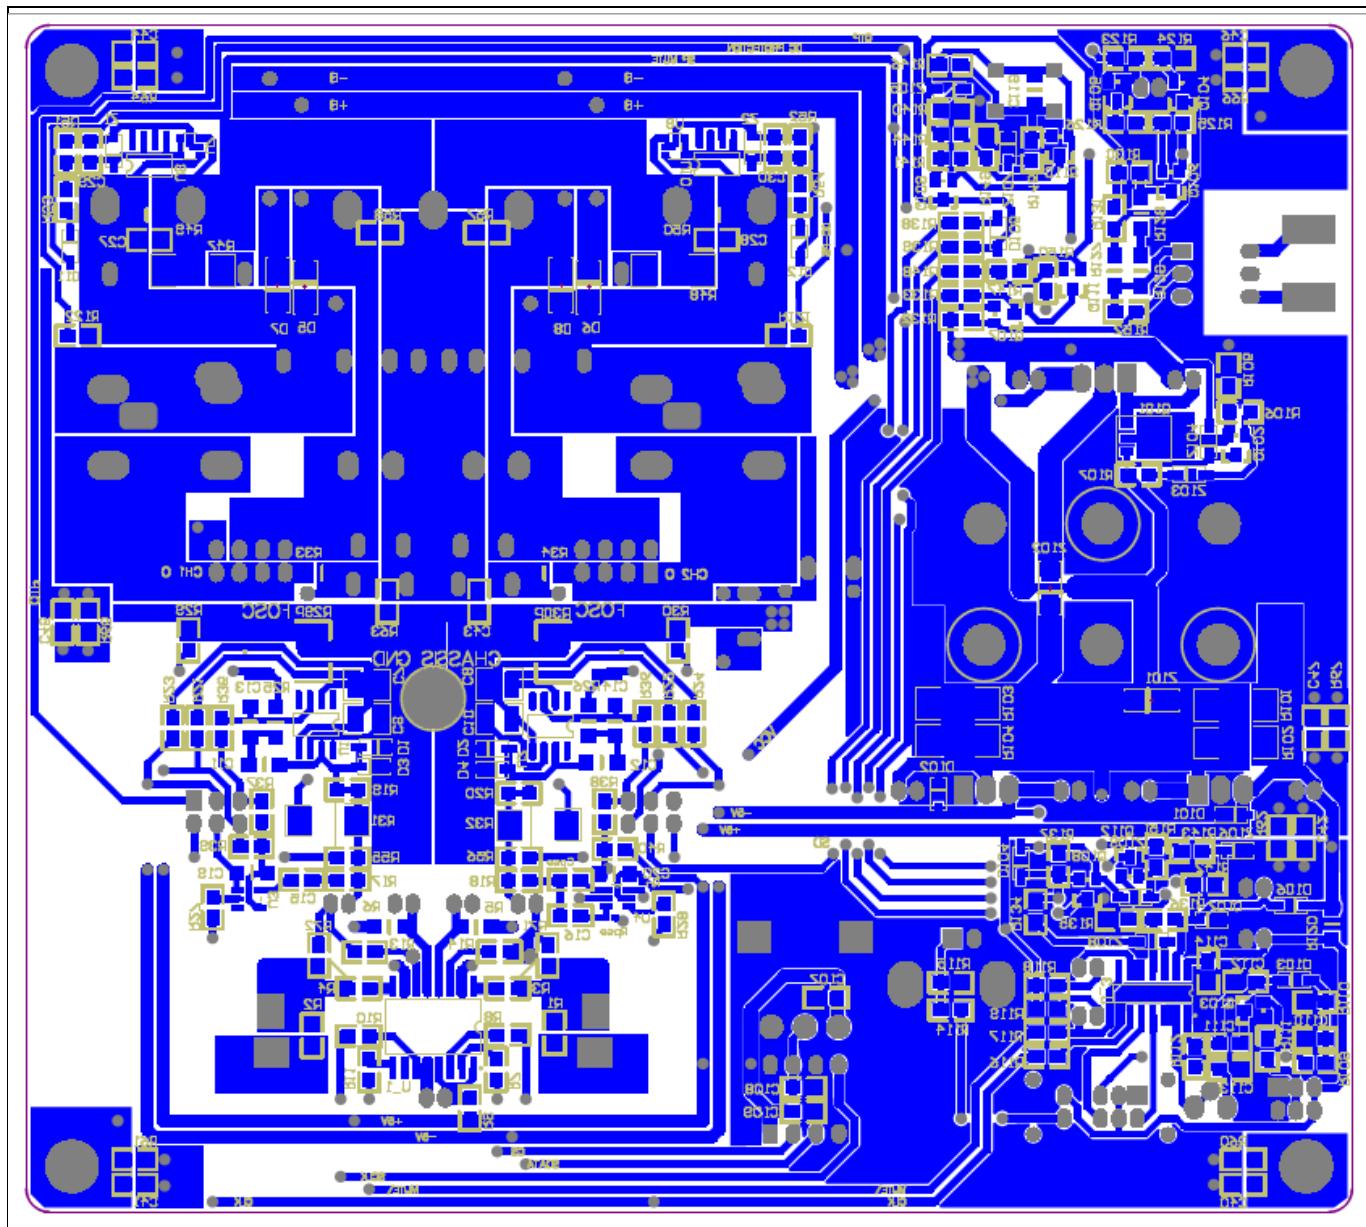**Figure 22** Motherboard bottom view

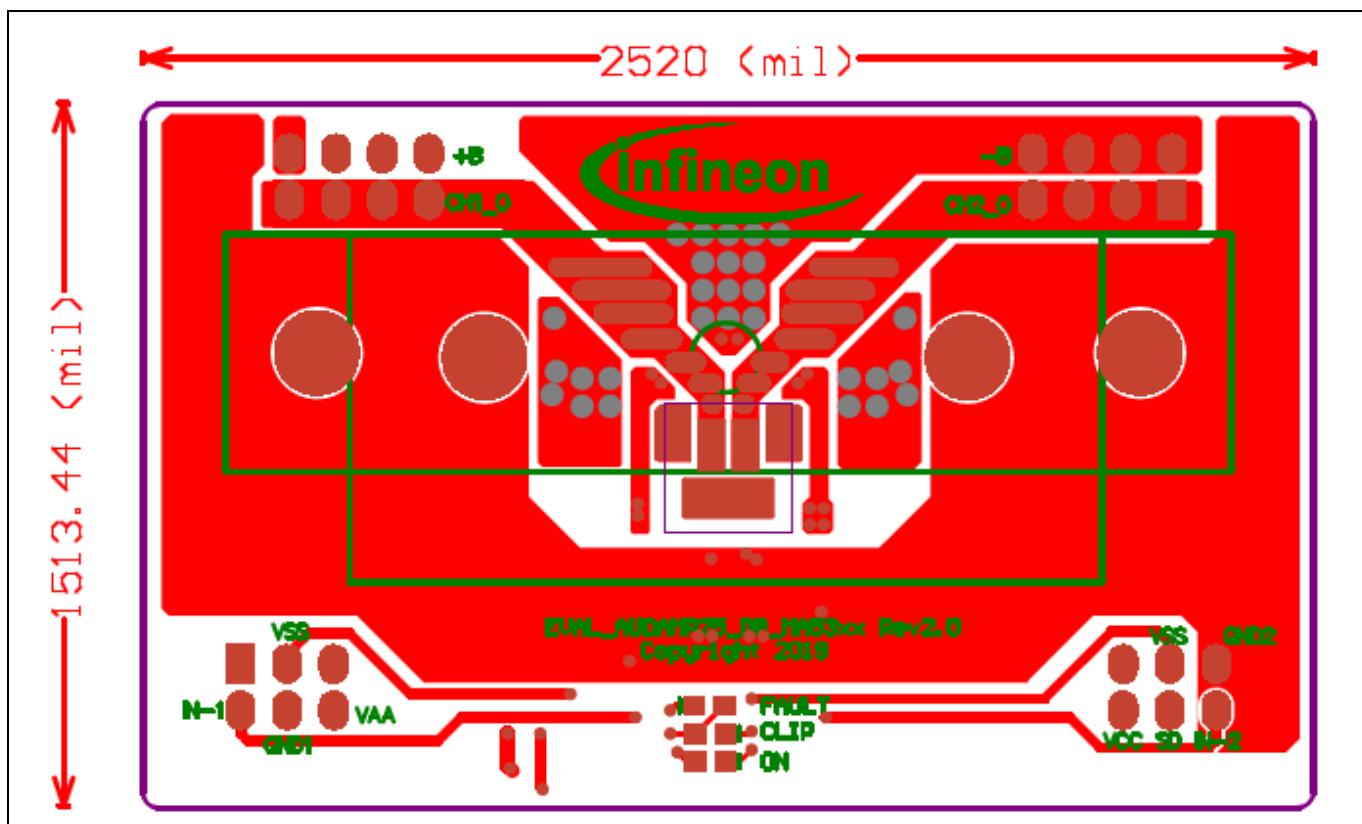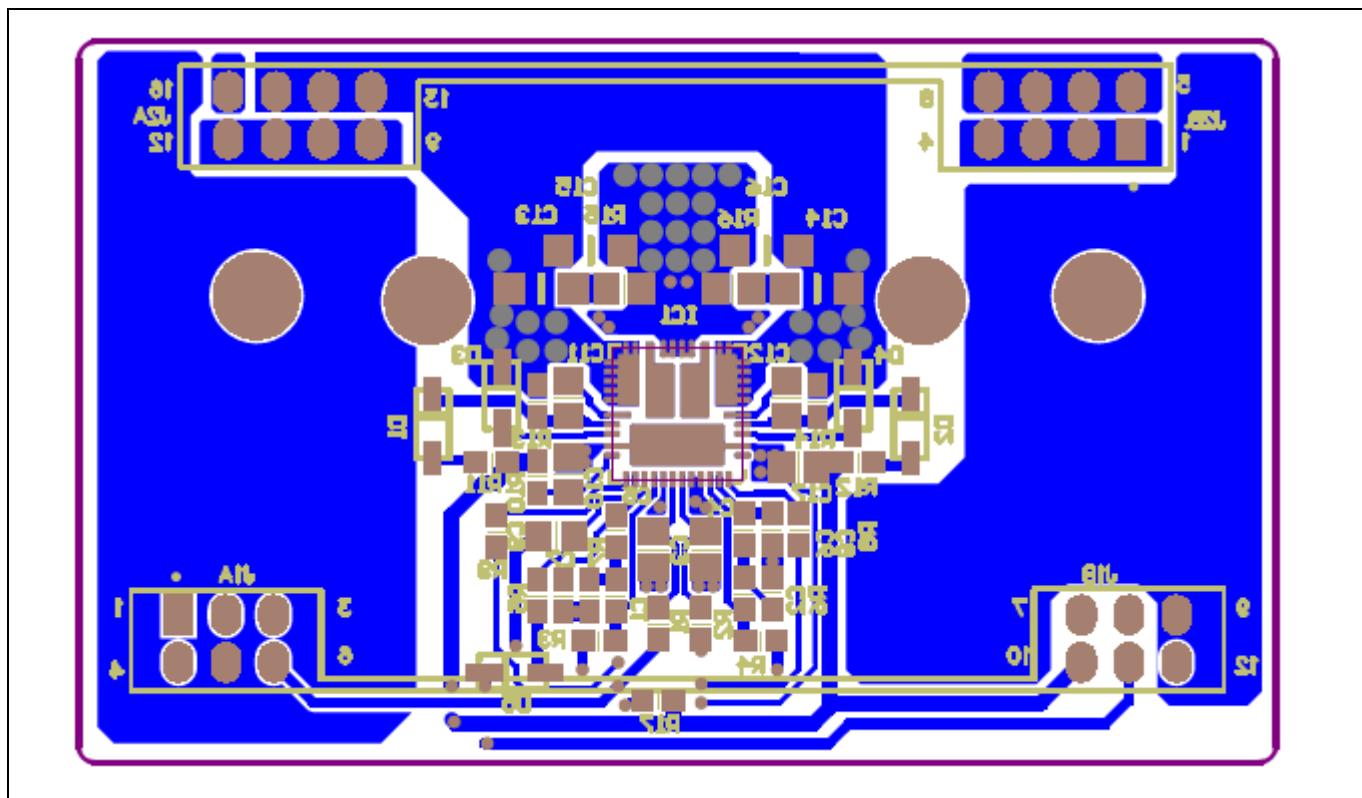**Figure 23** Daughterboard top view**Figure 24** Daughterboard bottom view

11 Bill of materials (BOM)

Table 8 Motherboard BOM

| No. | Part number | Designator | Description | Quantity | Vendor |
|-----|----------------|--|---|----------|---------|
| 1 | 565-1106-ND | C1, C5, C6, C101, C102, C103, C104, C105, C106, C115 | Aluminum capacitor 10 µF 20% 50 V radial | 10 | Digikey |
| 2 | 565-1103-ND | C2, C3 | Aluminum capacitor 2.2 µF 20% 50 V radial | 2 | Digikey |
| 3 | 478-1281-1-ND | C15, C16 | Ceramic capacitor 33 pF 100 V C0G/NP0 0805 | 2 | Digikey |
| 4 | 338-2598-ND | C17, C18 | Mica capacitor 150 pF 5% 500 V radial | 2 | Digikey |
| 5 | 1276-3141-1-ND | C19, C20 | Ceramic capacitor 2.2 µF 16 V X7R 1206 | 2 | Digikey |
| 6 | 732-8127-1-ND | C119 | Ceramic capacitor 0.1 µF 50 V X7R 1206 | 1 | Digikey |
| 7 | 495-1315-ND | C23, C24 | Film capacitor 0.47 µF 5% 400 V DC radial | 2 | Digikey |
| 8 | 495-1311-ND | C25, C26 | Film capacitor 0.1 µF 5% 400 V DC radial | 2 | Digikey |
| 9 | 565-1114-ND | C31, C32 | Aluminum capacitor 1000 µF 20% 50 V radial | 2 | Digikey |
| 10 | 490-14466-1-ND | C107, C109 | Ceramic capacitor 4.7 µF 16 V X7R 0805 | 2 | Digikey |
| 11 | 732-8074-1-ND | C108, C114 | Ceramic capacitor 10000 pF 50 V X7R 0805 | 2 | Digikey |
| 12 | 732-7858-1-ND | C110 | Ceramic capacitor 1000 pF 50 V C0G/NP0 0805 | 1 | Digikey |
| 13 | 732-7852-1-ND | C111, C113 | Ceramic capacitor 100 pF 50 V C0G/NP0 0805 | 2 | Digikey |
| 14 | 478-1372-1-ND | C112 | Ceramic capacitor 1200 pF 50 V X7R 0805 | 1 | Digikey |

EVAL_AUDAMP25**MA5332 evaluation board****Bill of materials (BOM)**

| No. | Part number | Designator | Description | Quantity | Vendor |
|-----|-------------------|------------------------------|--|----------|----------------------|
| 15 | 565-1037-ND | C116, C117 | Aluminum capacitor 100 μ F 20% 16 V radial | 2 | Digikey |
| 16 | 1N4148W-FDICT-ND | D103, D104, D105, D106, D107 | General-purpose diode 100 V 300 MA SOD123 | 5 | Digikey |
| 17 | MURA120T3GOSCT-ND | D5, D6, D7, D8 | General-purpose diode 200 V 2 A SMA | 4 | Digikey |
| 18 | RB161MM-20CT-ND | D101, D102 | Schottky diode 25 V 1 A PMDU | 2 | Digikey |
| 19 | 294-1086-ND | HS1 | Heatsink Horz six black TO-220 | 1 | Digikey |
| 20 | A32934-ND | J1A, J1B | Connector receptor 6POS 0.1 gold PCB | 2 | Digikey |
| 21 | A32935-ND | J2A, J2B | Connector receptor 8POS 0.1 gold PCB | 2 | Digikey |
| 22 | 277-1271-ND | J3, J4 | Terminal block 2P side ent. 9.53 mm PCB | 2 | Digikey or Mouser |
| 23 | CP-1422-ND | J5, J6 | Connector RCA jack mono 3.2 mm R/A | 2 | Digikey |
| 24 | 277-1272-ND | J7 | Terminal block 3P side ent. 9.53 mm PCB | 1 | Digikey or Mouser |
| 25 | A32248-ND | J8 | Connector BNC jack R/A 50 Ω PCB | 1 | Digikey |
| 26 | ED1567 | J9 | Terminal block 2POS side ent. 7.5 mm PCB | 1 | Digikey |
| 27 | Sagami 7G17A- | L1, L2 | class D inductor, 22 μ H | 2 | Inductors, Inc. |
| | 1D17A-220M | | | | ICE Components, Inc. |
| | CPD1715F-220 | | | | Codaca |
| 28 | 160-1143-ND | Normal | LED green clear T-1 T/H | 1 | Digikey |
| 29 | PVT412PBF-ND | P1 | SSR relay SPST-NO 140 MA 0 to 400 V | 1 | Digikey |
| 30 | 160-1140-ND | Protection | LED red clear T-1 T/H | 1 | Digikey |
| 31 | FCX491CT-ND | Q101 | Transistor NPN 60 V 1 A SOT-89 | 1 | Digikey |

EVAL_AUDAMP25**MA5332 evaluation board****Bill of materials (BOM)**

| No. | Part number | Designator | Description | Quantity | Vendor |
|-----|---------------------|--|--|----------|---------|
| 32 | MMBT5401-FDICT-ND | Q102, Q104, Q106, Q111 | Transistor PNP 150 V 0.6 A SMD SOT23-3 | 4 | Digikey |
| 33 | MMBT5551-FDICT-ND | Q103, Q105, Q107, Q108, Q109, Q110, Q112 | Transistor NPN 160 V 0.6 A SOT23-3 | 7 | Digikey |
| 34 | P100KACT-ND | R1, R2, R57, R58, R110, R126 | Resistor SMD 100K Ω 5% 1/8 W 0805 | 6 | Digikey |
| 35 | P100ACT-ND | R3, R4, R114 | Resistor SMD 100 Ω 5% 1/8 W 0805 | 3 | Digikey |
| 36 | P4.7ECT-ND | R5, R6 | Resistor SMD 4.7 Ω 5% 1/4 W 1206 | 2 | Digikey |
| 37 | P47ACT-ND | R7, R8, R10, R11, R27, R28, R115, R116, R117 | Resistor SMD 47 Ω 5% 1/8 W 0805 | 9 | Digikey |
| 38 | P10ACT-ND | R9, R105 | Resistor SMD 10 Ω 5% 1/8 W 0805 | 2 | Digikey |
| 39 | P3.3KDACT-ND | R13, R14 | Resistor 3.3K Ω 0.1% 1/8 W 0805 | 2 | Digikey |
| 40 | P22KACT-ND | R17, R18 | Resistor SMD 22K Ω 5% 1/8 W 0805 | 2 | Digikey |
| 41 | P47KACT-ND | R106, R121, R122, R130, R131, R132, R133, R137, R139, R141, R145, R146, R147, R149, R150, R151 | Resistor SMD 47K Ω 5% 1/8 W 0805 | 16 | Digikey |
| 42 | P0.0ACT-ND | R55, R56 | Resistor SMD 0 Ω JUMPER 1/8 W 0805 | 2 | Digikey |
| 43 | P470ACT-ND | R39, R40 | Resistor SMD 470 Ω 5% 1/8 W 0805 | 2 | Digikey |
| 44 | P100ECT-ND | R120 | Resistor SMD 100 Ω 5% 1/4 W 1206 | 1 | Digikey |
| 45 | TNPW251247K0BEEG-ND | R31, R32 | Resistor 47K Ω 0.1% 1/2 W 2512 | 2 | Digikey |
| | CPD3119-220M | Substitute | | | Codaca |
| 46 | YAG2331CT-ND | R33, R34 | Resistor SMD 1K Ω 0.1% 1/4 W 1206 | 2 | Digikey |
| 47 | P1.0KACT-ND | R109, R118, R119, R123 | Resistor SMD 1K Ω 5% 1/8 W 0805 | 4 | Digikey |
| 48 | PT10XCT | R47, R48 | Resistor SMD 10 Ω 5% 1 W 2512 | 2 | Digikey |
| 49 | P2.2KECT-ND | R49, R50 | Resistor SMD 2.2K Ω 5% 1/4 W 1206 | 2 | Digikey |
| 50 | PT47XCT-ND | R101, R102, R103, R104 | Resistor SMD 47 Ω 5% 1 W 2512 | 4 | Digikey |

EVAL_AUDAMP25**MA5332 evaluation board****Bill of materials (BOM)**

| No. | Part number | Designator | Description | Quantity | Vendor |
|-----|---------------------|--|--|----------|------------|
| 51 | P4.7KACT-ND | R107, R138 | Resistor SMD 4.7K Ω 5% 1/8 W 0805 | 2 | Digikey |
| 52 | PDB12-H4251-103BF | R108 | Potentiometer 10K Ω 0.08 W carbon linear | 1 | Digikey |
| 53 | P10KACT-ND | R111, R124, R125, R134, R140, R143, R144, R148 | Resistor SMD 10K Ω 5% 1/8 W 0805 | 8 | Digikey |
| 54 | P820ACT-ND | R112 | Resistor SMD 820 Ω 5% 1/8 W 0805 | 1 | Digikey |
| 55 | 3362H-502LF-ND | R113 | Trimmer 5K Ω 0.5 W PC pin top | 1 | Digikey |
| 56 | P6.8KECT-ND | R127, R128, R129 | Resistor SMD 6.8K Ω 5% 1/4 W 1206 | 3 | Digikey |
| 57 | P82KACT-ND | R135 | Resistor SMD 82K Ω 5% 1/8 W 0805 | 1 | Digikey |
| 58 | P68KACT-ND | R136, R142 | Resistor SMD 68K Ω 5% 1/8 W 0805 | 2 | Digikey |
| 59 | RMCF0402ZT0R00CT-ND | Rn | Resistor 0 Ω jumper 1/16 W 0402 | 1 | Digikey |
| 60 | P8010S-ND | S1 | Tactile switch SPST-NO 0.02 A 15 V | 1 | Digikey |
| 61 | EG1908-ND | S2 | Slide switch DPDT 100 MA 12 V | 1 | Digikey |
| 62 | EG1944-ND | S3 | Slide switch DP3T 200 MA 30 V | 1 | Digikey |
| 63 | 296-11599-1-ND | U3 | SN74LVC1G04DBVR | 1 | Digikey |
| 64 | 296-13261-1-ND | U4 | SN74LVC2G04DBVR | 1 | Digikey |
| 65 | 73C8016 or 72J5420 | U_1 | IC, digital volume control, SOIC-16 | 1 | Newark |
| 66 | 3310-IR01 | U_2 | CS3310 standalone controller | 1 | *Tachyonix |
| 67 | 296-1194-1-ND | U_3 | IC Schmitt inverter 6CH 14SOIC | 1 | Digikey |
| 68 | MC78M05CTGOS-ND | U_4 | IC linear regulator 5 V 500 MA TO220AB | 1 | Digikey |
| 69 | LM79M05CT-ND | U_5 | IC linear regulator - 5 V 500 MA TO220-3 | 1 | Digikey |
| 70 | 497-6039-5-ND | U_6 | IC linear regulator 10 V 2 A TO220AB | 1 | Digikey |
| 71 | BZT52C15-FDICT-ND | Z103 | Zener diode 15 V 500 MW SOD123 | 1 | Digikey |

Bill of materials (BOM)

| No. | Part number | Designator | Description | Quantity | Vendor |
|-----|---------------------|---|---|----------|---------|
| 72 | 1SMA5917BT3GOSCT-ND | Z101, Z102 | Zener diode 4.7 V 1.5 W SMA | 2 | Digikey |
| 73 | BZT52C24-FDICT-ND | Z104 | Zener diode 24 V 500 MW SOD123 | 1 | Digikey |
| 74 | MMSZ5260BT1GOSCT-ND | Z105 | Zener diode 43 V 500 MW SOD123 | 1 | Digikey |
| 75 | BZT52C18-FDICT-ND | Z106 | Zener diode 18 V 500 MW SOD123 | 1 | Digikey |
| 76 | MMSZ20T1GOSCT-ND | Z107 | ON Semiconductor Zener diode 20 V 500 MW SOD123 | 1 | Digikey |
| 77 | BZT52C8V2-FDICT-ND | Z108, Z109 | Zener diode 8.2 V 500 MW SOD123 | 2 | Digikey |
| 78 | CR-BA-7C6-180D | Volume knob | Round knob with indicator line | 1 | Newark |
| 79 | 82K6096 | Thermalloy TO-220 mounting kit with screw | Mounting kit TO- 220 | 3 | Newark |
| 80 | 8401K-ND | 1/2" standoffs 4-40 | Hexagonal standoff #4-40 Aluminum 1/2" | 5 | Digikey |
| 81 | H724-ND | 4-40 nut | Hexagonal nut 4-40 stainless steel | 5 | Digikey |
| 82 | H729-ND | No. 4 lock washer | Internal lock washer #4 SS | 5 | Digikey |

Note:

*: Tachyonix Corporation, 14 Gonaka Jimokuji Jimokuji-cho, Ama-gun Aichi, JAPAN 490-1111
<http://www.tachyonix.co.jp> email: info@tachyonix.co.jp

Table 9 Daughterboard bill of materials

| No. | Part number | Designator | Description | Quantity | Vendor |
|-----|---------------|----------------|---|----------|---------|
| 1 | 490-1500-1-ND | C1, C2, C5, C6 | Ceramic capacitor 2200 pF 50 V 10% X7R 0603 | 4 | Digikey |
| 2 | 587-2668-1-ND | C3, C4 | Ceramic capacitor 10 µF 10 V X7R 10% 0805 | 2 | Digikey |
| 3 | 399-1082-1-ND | C7, C8 | Ceramic capacitor 1000 pF 50 V X7R 0603 | 2 | Digikey |
| 4 | 490-5519-1-ND | C9, C10 | Ceramic capacitor 10 µF 16 V X6S 0805 | 2 | Digikey |
| 5 | 445-1418-1-ND | C11, C12, C17 | Ceramic capacitor 0.10 µF 100 V X7R 10% 0805 | 3 | Digikey |

EVAL_AUDAMP25**MA5332 evaluation board****Bill of materials (BOM)**

| No. | Part number | Designator | Description | Quantity | Vendor |
|-----------|---------------------|--------------------|---|----------|-----------------|
| 6 | 732-12081-1-ND | C13, C14, C15, C16 | Ceramic capacitor 0.1 µF 200 V X7R 1206 | 4 | Digikey |
| 7 | RF071MM2SCT-ND | D1, D2, D3, D4, D5 | General-purpose diode 200 V 700 MA PMDU | 5 | Digikey |
| 8 | 160-1183-1-ND | DS1(CLIP) | LED green clear 0603 SMD | 1 | Digikey |
| 9 | 160-1181-1-ND | DS2(FAULT) | LED red clear 0603 SMD | 1 | Digikey |
| 10 | 160-1646-1-ND | DS3(ON) | LED 468 nm blue clear 0603 SMD | 1 | Digikey |
| 11 | MA5332 | IC1 | 2-channel PowIRaudio integrated class D IC | 1 | Infineon |
| 12 | A26568-ND | J1A, J1B | Vertical header connector 6POS 0.100 30 AU | 2 | Digikey |
| 13 | A26570-ND | J2A, J2B | Vertical header connector 8POS 0.100 30 AU | 2 | Digikey |
| 14 | RMCF0603JT10R0CT-ND | R1, R2 | Resistor 10 Ω 1/10 W 5% 0603 SMD | 2 | Digikey |
| 15 | RMCF0603FT2K70CT-ND | R3, R4 | Resistor 2.7 kΩ 1/10 W 1% 0603 SMD | 2 | Digikey |
| 16 | RMCF0603JT100RCT-ND | R5 | Resistor 100 Ω 1/10 W 5% 0603 SMD | 1 | Digikey |
| 17 | 311-620GRCT-ND | R6, R7 | Resistor 620 Ω 1/10 W 5% 0603 SMD | 2 | Digikey |
| 18 | RHM10KGCT-ND | R8, R9, R17 | Resistor 10K Ω 1/10 W 5% 0603 SMD | 3 | Digikey |
| 19 | RMCF0603JT4R70CT-ND | R10, R11, R12 | Resistor TF 1/10 W 4.7 Ω 5% 0603 | 3 | Digikey |
| 20 | RHM33KGCT-ND | R13, R14 | Resistor 33K Ω 1/10 W 5% 0603 SMD | 2 | Digikey |
| 21 | 311-1.0ARCT-ND | R15, R16 | Resistor 1.0 Ω 1/8 W 5% 0805 SMD | 2 | Digikey |
| 22* | V8818V | Heatsink | Heatsink aluminum anode | 1 | Digikey |
| 23 | BER161-ND | Thermal pad | Thermal pad | 1/8 | Digikey |
| 24 | Screws | | Depends on holes on the heatsink | 2 | |

Note: Heatsink is an option for AMP25 to deliver higher power.

Revision history

| Document version | Date of release | Description of changes |
|-------------------------|------------------------|-------------------------------|
| V 1.0 | 2021-10-11 | First release |
| | | |
| | | |

Trademarks

All referenced product or service names and trademarks are the property of their respective owners.

Edition 2021-10-11

Published by

**Infineon Technologies AG
81726 Munich, Germany**

**© 2021 Infineon Technologies AG.
All Rights Reserved.**

Do you have a question about this document?

Email: erratum@infineon.com

Document reference

UM_2104_PL88_2105_194141

IMPORTANT NOTICE

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics ("Beschaffenheitsgarantie").

With respect to any examples, hints or any typical values stated herein and/or any information regarding the application of the product, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

In addition, any information given in this document is subject to customer's compliance with its obligations stated in this document and any applicable legal requirements, norms and standards concerning customer's products and any use of the product of Infineon Technologies in customer's applications.

The data contained in this document is exclusively intended for technically trained staff. It is the responsibility of customer's technical departments to evaluate the suitability of the product for the intended application and the completeness of the product information given in this document with respect to such application.

For further information on the product, technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies office (www.infineon.com).

WARNINGS

Due to technical requirements products may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies office.

Except as otherwise explicitly approved by Infineon Technologies in a written document signed by authorized representatives of Infineon Technologies, Infineon Technologies' products may not be used in any applications where a failure of the product or any consequences of the use thereof can reasonably be expected to result in personal injury.