
Ŧ	D D	гт – 1	n –		0
	<u> </u>			•	





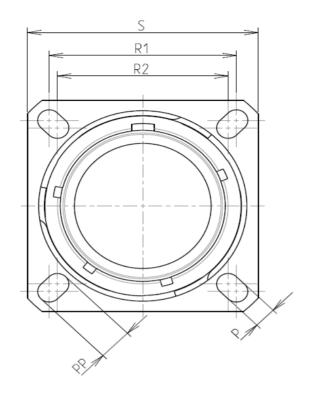

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 13

PLATING : F = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ယ

-Standard : Based on MIL-DTL-38999 Series III

	-Shell Material	: Aluminium		
	-Shell Plating	: Nickel		
2	-Insulator	: Thermoplastic		
	-Contacts	: Copper Alloy		
	-Seals & Grommet	: Silicon Elastomer		
	-Contact Plating	: Gold over copper Alloy 0.8µm minimum		
	-Durability	: 500 Mating cycles		
	-Delivered without Souriau contacts			
	-Temperature Range	65°C to +200°C		
	-Salt Spray	: 48 hours		
_	-Mass	: 17.41 g ± 10%		

8D 0

G

13

F

26

S

F

Ν


L


Dim	Nominal
Р	3.25±0.2
PP	4.93±0.2
R1	23.01
R2	20.62
S	28.6±0.3
V	20.83+0/-1.25
W	2.1/2.5
Z	31.5 Max
VV THREAD	M18x1-6g

ORIENTATION : N

CONTACT TYPE : SOCKET(500 Matings)

Е



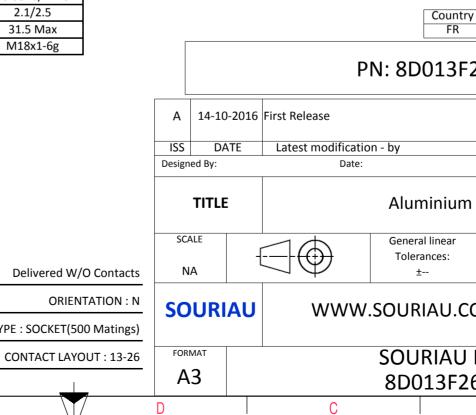

σ		A			
				4	
S EXAMPLE				3	
any non-conformits which does not co er of the Parties or B adation, technical n untry Jurisc R BF26SNL	mply with by a third part			2	
			MOD N°		
um Receptac	NPRDS / 85 This doct	PROJECT 59 Jument is the prop SOURIAU		1	
	communicated without permission				
U DRG N° F26SNL-C			SHEET 1/2		
В		Α		J	

_	т	വ	П	т	D	0	
		Contact Layout				Pa	anel Cutou
		26				SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING	
4	(8		
		2#12 6#22D					
		13-26]		<u>Y</u>		бт
	Ctc A	X Y 0 3.47				\ØA_	
	В	2.47 4.34				Dim	
ω	C D	2.47 -4.34 0 -3.47	-			ØA ØAA	
	E	-2.47 -4.34	-			R1	
	F 1	-2.47 4.34 3.25 0	-			ØT	
	2	-3.25 0					
	-						
						SOURIAU shall not be lial due to a use of the Pro the Specifications issued by (professional reco	oducts wh y either of
N							Countr FR
						PN: 80	0013F
					A 14-10-20	16 First Release	
					ISS DATE Designed By:	Latest modification - by Date:	
					TITLE	Alu	minium
_					SCALE		ral linear rances: ±
					SOURIA		
					FORMAT		JRIAU
		2	-		A3		013F2
	Н	G	l F	E	D	C	

