

T	G	П	m	0



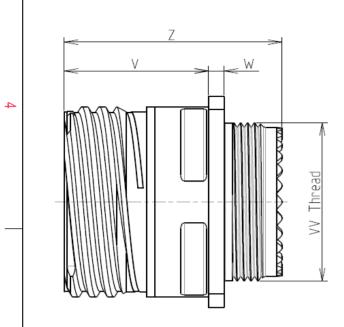



LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

ယ

-Standard : Based on MIL-DTL-38999 Series III

SHELL TYPE : Square Flange Receptacle

SHELL SIZE : 21

PLATING : F = Nickel

Н

CONTACT TYPE : Standard Crimp Contact

	-Shell Material	: Aluminium	
	-Shell Plating	: Nickel	
	-Insulator	: Thermoplastic	
	-Contacts	: Copper Alloy	
	-Seals & Grommet	: Silicon Elastomer	
\sim	-Contact Plating	: Gold over copper Alloy 0.8µm minimum	
	-Durability	: 500 Mating cycles	VV
	-Delivered with Souria	u contacts and Accessories	
	-Temperature Range	65°C to +200°C	
	-Salt Spray	: 48 hours	
	-Mass	: 43.39 g ± 10%	
	BASIC SERIES:	8D 0 - 21 F 48 P C	

F

G


Dim	Nominal
Р	3.25±0.2
PP	4.93±0.2
R1	31.75
R2	29.36
S	39.7±0.3
V	20.07+0/-1.25
W	2.1/3.2
Z	31.5 Max
/V THREAD	M31x1-6g


ORIENTATION : C

CONTACT TYPE : PIN(500 Matings)

Е

CONTACT LAYOUT : 21-48



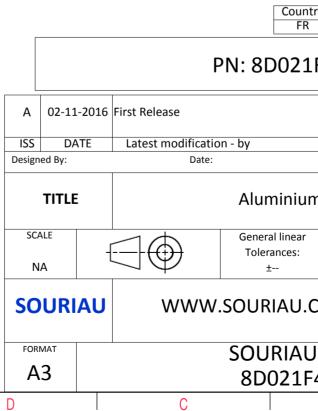

	Φ		А		
	R				4
AS EXA	AMPLE				3
s whic er of t ndatio untry FR		mply with by a third par			2
.164	48PC				
		CUSTOME	R DRAWING	MOD N°	
um Receptacle 8D series					
ar :	NPRDS / PROJECT 859				
			cument is the prop	perty of	1
J.CC		it mus	SOURIAU st not be reproduc icated without pe	ed or	
	DRG N°			SHEET	
_F4	8PC-C			1/2	J
	В	1	A		

		۵	т —	m	D		0		ω
		Contact Layout						Panel Cutout	
		48				SQ	UARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING	SQU	ARE
4	-	4#8 Power				2	REAR MOUNTING	R	
		21-48]			¥ (<u>*</u>	-C
	Ctc	X Y	-			_	ØA	_ØT	
	A	4.57 4.57	-						
	B C	4.57 -4.57 -4.57 -4.57	-				Dim	n Nom	ina
ω	D	-4.57 -4.57	-				ØA	36.12	m
							ØA/ R1		
							SOURIAU shall not be due to a use of the the Specifications issued (professional re	Products which do	es arti
2								Country FR	
							PN: 8	3D021F48I) (
							First Release		
	-				ISS Designed	DATE i By:	Latest modification - by Date:		
								uminium Rec	e
<u> </u>					SCALI	-		neral linear Ilerances: ±	
					SOL	JRIAU	WWW.SOL	JRIAU.COM	

F

Е

G

Н

FORMAT

A3

D

С

