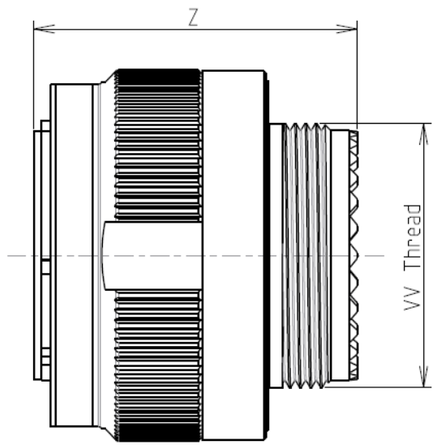

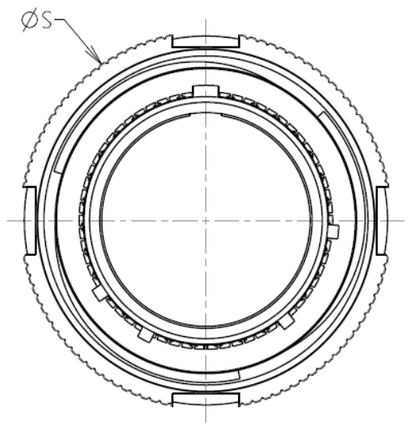

Keying Shown as example

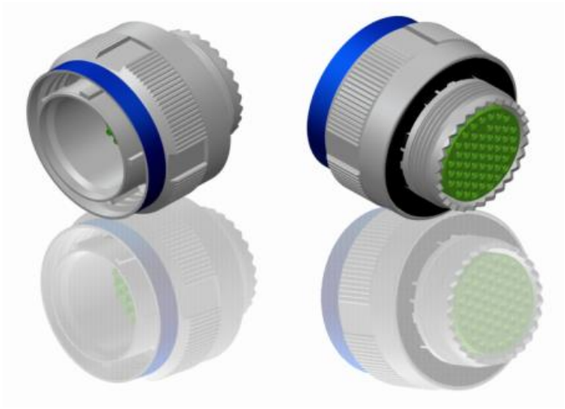

LAYOUT SHOWN AS EXAMPLE

CHARACTERISTICS

-Standard : Based on MIL-DTL-38999 Series III
-Shell Material : Aluminium
-Shell Plating : Nickel
-Insulator : Thermoplastic
-Contacts : Copper Alloy
-Seals & Grommet : Silicon Elastomer
-Contact Plating : Gold over copper Alloy 0.8µm minimum
-Durability : 500 Mating cycles
-Delivered with Souriau contacts and Accessories

-Temperature Range : -65°C to +200°C
-Salt Spray : 48 hours
-Mass : 14.98 g ± 10%

Connector dimension	
Dim	**Nominal**
ØS	25 Max
Z	31 Max
VV THREAD	M15x1-6g

BASIC SERIES:	8D	5	-	11	F	01	P	C
SHELL TYPE : Plug with RFI Shielding								
CONTACT TYPE : Standard Crimp Contact								
SHELL SIZE : 11								
PLATING : F = Nickel								
								ORIENTATION : C
								CONTACT TYPE : PIN(500 Matings)
								CONTACT LAYOUT : 11-01

Country	Jurisdiction & Control List
FR	Not Listed

PN: 8D511F01PC

ISS	DATE	Latest modification - by	MOD N°
A	15-10-2016	First Release	

Designed By: Date: **CUSTOMER DRAWING**

TITLE Aluminium Plug 8D series

SCALE NA | General linear Tolerances: ±-- | NPRDS / PROJECT **859**

SOURIAU | WWW.SOURIAU.COM

FORMAT A3 | SOURIAU DRG N° 8D511F01PC-C | SHEET 1/2

Contact Layout

01

1#12

11-01		
Ctc	X	Y
A	0	0

SOURIAU shall not be liable for any non-conformity or damage
due to a use of the Products which does not comply with
the Specifications issued by either of the Parties or by a third party
(professional recommendation, technical notice.)

Country	Jurisdiction & Control List
FR	Not Listed

PN: 8D511F01PC

ISS	DATE	Latest modification - by	MOD N°
A	15-10-2016	First Release	

Designed By: Date: **CUSTOMER DRAWING**

TITLE Aluminium Plug 8D series

SCALE NA

General linear Tolerances: ±--

NPRDS / PROJECT **859**

SOURIAU WWW.SOURIAU.COM

FORMAT A3

SOURIAU DRG N° 8D511F01PC-C