


- Stable to 500°F
- Jacketed With A Non-Permeable, Heavy Silicone Coating That Is Flexible Enough To Follow Tight Radius Curves
- Contains Radiant Heat To Prevent Damage To Nearby Components
- Resists Gasoline And Engine Chemicals
- Cut And Abrasion Resistant

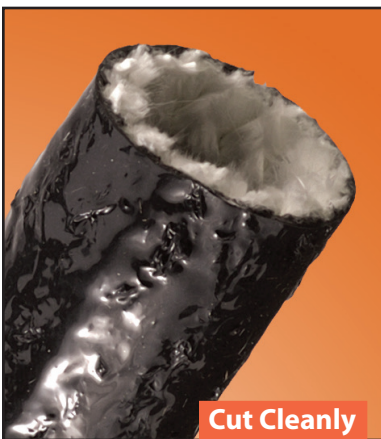

Cut Cleanly  
Scissors

**Material FIN**

Silicone Jacketed Fiberglass

**Grade**

FIN

**Wall Thickness**

.072"

**Drawing Number**

TF001FIN-WD



[www.techflex.com](http://www.techflex.com)

800.323.5140 • 973.300.9242 • fax: 973.300.9409  
104 Demarest Road • Sparta, NJ 07871

**Put-Ups**

Nominal Size	Part #	Wall Thickness ±0.010"	Bulk Spool	Shop Spool	Available Colors	Lbs/100'
1/4"	FIN0.25	.072"	100'	50'	BK, RD, SV	4.80
3/8"	FIN0.38	.072"	100'	50'	BK, RD, SV	6.30
1/2"	FIN0.50	.072"	100'	50'	BK, RD, SV	7.40
5/8"	FIN0.63	.072"	100'	50'	BK, RD, SV	8.80
3/4"	FIN0.75	.072"	50'	25'	BK, RD, SV	9.80
7/8"	FIN0.88	.072"	50'	25'	BK, RD, SV	10.10
1"	FIN1.00	.072"	50'	25'	BK, RD, SV	13.50
1 1/4"	FIN1.25	.072"	50'	25'	BK, RD, SV	14.00
1 1/2"	FIN1.50	.072"	50'	25'	BK, RD, SV	14.70
1 3/4"	FIN1.75	.072"	50'	25'	BK, RD, SV	16.30
2"	FIN2.00	.072"	50'	25'	BK, RD, SV	20.50
2 1/4"	FIN2.25	.072"	50'	25'	BK, RD, SV	22.90
2 3/8"	FIN2.38	.072"	50'	25'	BK, RD, SV	26.90
2 1/2"	FIN2.50	.072"	50'	25'	BK, RD, SV	28.30
2 3/4"	FIN2.75	.072"	50'	25'	BK, RD, SV	30.10
2 7/8"	FIN2.88	.072"	50'	25'	BK, RD, SV	32.00
3"	FIN3.00	.072"	50'	25'	BK, RD, SV	33.40
3 1/2"	FIN3.50	.072"	25'	-	BK, RD, SV	37.20
4"	FIN4.00	.072"	25'	-	BK, RD, SV	40.10


**Silicone Jacketed Fiberglass Resists Heat, Abrasion And Moisture**

Silicone jacketed fiberglass sleeving is the choice of professionals in racing and other industries where protection from constant temperatures approaching 500° F is mandatory. Engineered to contain radiant exhaust and coolant heat within pipes and hoses and to protect expensive performance equipment and operators from thermal damage.

FireFlex is completely non-conductive, will not melt, delaminate, become brittle or support combustion under normal conditions, and provides a professional level solution to thermal protection needs in any application.


**Fuel lines in race cars are especially vulnerable to high engine temperatures. FireFlex can help maintain proper fuel temperature.**

Colors Available:




Black (BK), Red (RD) and Silver (SV).

**Colors Available:**  
3= BK, RD, SV

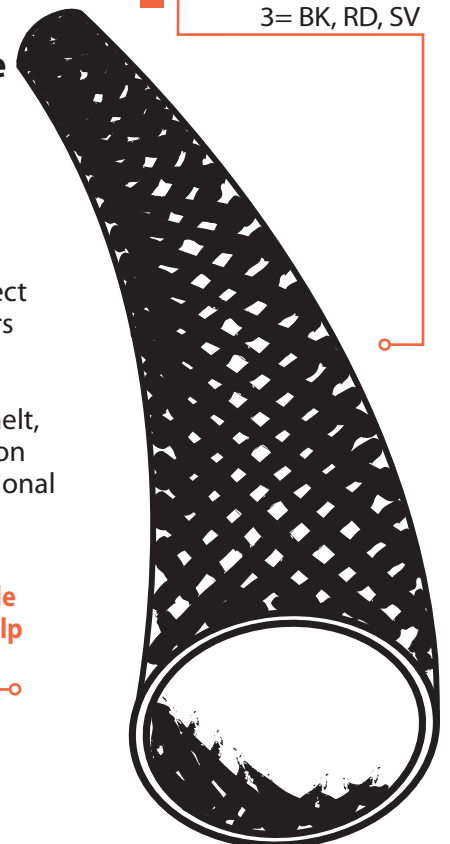

**HALOGEN  
FREE**



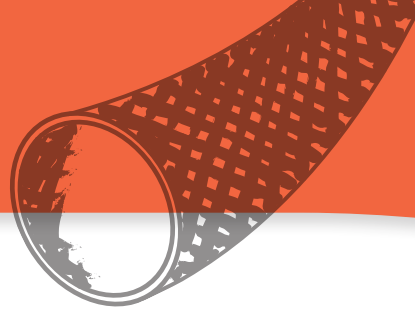

## **ABRASION** **FLAMMABILITY**

**Abrasion Resistance**  
**Extreme**

Rating \_\_\_\_\_ Non Flammable  
\_\_\_\_\_ Non Combustible

**Abrasion Test Machine**  
**Taber 5150**

**Abrasion Test Wheel**  
**Calibrase H-18**

**Abrasion Test Load**  
**500g**

**Room Temperature**  
**71°F**

**Humidity**  
**61%**

**Small Hole In Coating**  
**400 Test Cycles**

**Several Small Holes**  
**Worn Through Coating**  
**1,200 Test Cycles**

**Coating Worn Through**  
**-No Wear On Fiberglass**  
**4,800 Test Cycles**

**Fiberglass Begins To**  
**Show Moderate Wear**  
**6,500 Test Cycles**

**Material Destroyed**  
**8,400 Test Cycles**

**Pre-Test Weight**  
**22,961.3 mg**

**Post-Test Weight**  
**20,942.2 mg**

**Test End Loss Of Mass**  
**Point Of Destruction**  
**2,019.1 mg**

## **CHEMICAL RESISTANCE**


1=No Effect      4=More Affected  
2=Little Effect    5=Severely Affected  
3=Affected

Aromatic Solvents _____	1
Aliphatic Solvents _____	1
Chlorinated Solvents _____	1
Weak Bases _____	1
Salts _____	1
Strong Bases _____	1
Salt Water 0-S-1926 _____	1
Hydraulic Fluid MIL-H-5606 _____	1
Lube Oil MIL-L-7808 _____	1
De-Icing Fluid MIL-A-8243 _____	1
Strong Acids _____	2
Strong Oxidants _____	2
Esters/Ketones _____	1
UV Light _____	1
Petroleum _____	1
Fungus ASTM G-21 _____	1
Halogen Free _____	Yes
RoHS _____	Yes
SVHC _____	_____

**Melt Point**  
*ASTM D-2117*  
**2,048°F (1,120°C)**

**Maximum Continuous**  
*Mil-I-23053*  
**500°F (260°C)**

**Minimum Continuous**  
**-65°F (-54°C)**

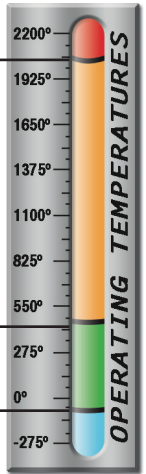

## **PHYSICAL PROPERTIES**

Monofilament Diameter \_\_\_\_\_ NA  
*ASTM D-204*

Flammability Rating \_\_\_ Non Flammable

Recommended Cutting \_\_\_\_\_ Scissor

Colors \_\_\_\_\_ 3

Wall Thickness \_\_\_\_\_ .072"

Tensile Strength (Yarn) \_\_\_\_\_  
*ASTM D-2256 Lbs*

Specific Gravity *ASTM D-792* \_\_\_\_\_ NA

www.techflex.com