


**REVISIONS**

REV	ECR	DESCRIPTION	DRAWN	DATE
1		ENGINEERING RELEASE	P. BURDGE	07/23/2020

-XX IN THE ENDING OF THE CABLE PART NUMBER IS CALLING OUT THE LENGTH OF THE ASSEMBLY FROM CENTER TO CENTER OF CONNECTORS. EXAMPLES SHOWN BELOW:


LTI P/N: CB1.32D-2IPX-2IN (2 INCHES)  
 CB1.32D-2IPX-4.5IN (4.5 INCHES)

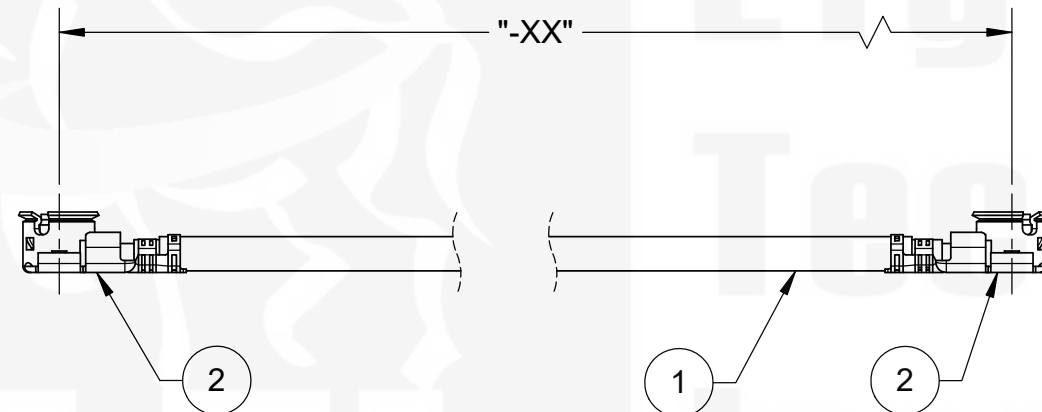

LENGTH TOLERANCE FOR CABLE ASSEMBLIES	
Inches	Millimeters
0 - 2IN +/- 0.040	0 - 51 +/- 1
2IN - 6IN +/- 0.080	51 - 153 +/- 2
6IN - 12IN +/- 0.140	153 - 305 +/- 3.5
12IN - 48IN +/- 0.250	305 - 1219 +/- 6.4
48IN - 144IN (12FT) +/- 0.500	1219 - 3658 +/- 13
144IN (12FT) - ABOVE +/- 1.0	3658 - ABOVE +/- 25
UNLESS OTHERWISE SPECIFIED ON DRAWING	

ITEM	PART NUMBER	DESCRIPTION	QTY
1	1.32D MICRO COAX	CABLE, 1.32D (DBL SHLD) MICRO COAX, GREEN	AR
2	IPXLF11GPB-132	IPX(MHF1), RHT ANGLE, JACK, CABLE CRIMP	2

MHF IS A REGISTERED TRADEMARK OF I-PEX CO., LTD. CORPORATION

DO NOT SCALE DRAWING		 <b>Lighthouse Technologies</b> San Diego, CA WWW.RFCONNECTOR.COM
TOLERANCES UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS X = ±0.5 X.X = ±0.25 X.XX = ±0.13 ANGLE = ±30'		
TITLE: CABLE ASSEMBLY, IPX (MHF1), R/A JACK, CRIMP TO IPX (MHF1), R/A JACK, CRIMP USING 1.32D MICRO COAX, GREEN		SIZE: B PART/DWG. NO: CB1.32D-2IPX-XX REV: 1
CUSTOMER APPROVAL SIGN / DATE: _____ ENG APPR. _____ CHECKED _____ DRAWN: P. BURDGE 07/23/2020 NAME: _____ DATE: _____		SCALE: 4:1 FILE NAME: _____ SHEET 1 OF 1

PROPRIETARY AND CONFIDENTIAL

UNLESS OTHERWISE SPECIFIED: THIS DOCUMENT CONTAINS LIGHTHORSE TECHNOLOGIES INFORMATION. REPRODUCTION, USE, DISCLOSURE OR TRANSMITTAL OF ALL OR ANY PART OF THIS DOCUMENT IS PROHIBITED EXCEPT TO THE EXTENT APPROVED IN WRITING BY AN AUTHORIZED REPRESENTATIVE OF LIGHTHORSE TECHNOLOGIES. LIGHTHORSE TECHNOLOGIES RESERVES ALL RIGHTS UNDER PATENTS, TRADEMARKS, COPYRIGHTS AND TRADE SECRETS. COPY RIGHTS OF LIGHTHORSE TECHNOLOGIES 2011, ALL RIGHTS RESERVED.

