

THIS SERIES FULLY CONFORMS TO

THE EUROPEAN UNION DIRECTIVES


2011/65/EU FOR RoHS COMPLIANCY.

Ē

COMPLIANT

## NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:	THERMOPLASTIC POLYESTER, UL94V-0 STEEL, NICKEL PLATED COPPER ALLOY, GOLD FLASH PLATED
OPERATING TEMPERATURE:	-55°C ~ 125°C
POWER/CO-AX CONTACT RATING: (IF PRESENT)	30A (CURRENT)
SIGNAL CONTACT CURRENT RATING:	5A PER CONTACT 10mΩ MAX.
INSULATOR RESISTANCE:	5000MΩ min.
DIELECTRIC WITHSTANDING VOLTAGE	1000V AC rms

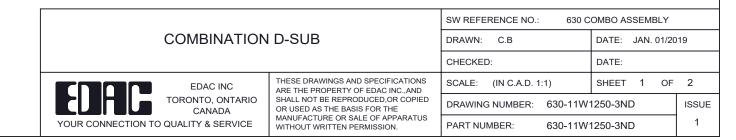


.XX ±0.13

.XXX ±0.05

10.70

1000V AC rms



ORIGINAL

