
Ŧ	۵	нт – – – – – – – – – – – – – – – – – – –	m	0







LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

-Mass

BASIC SERIES:

SHELL SIZE : 15

PLATING : S = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ယ

-Standard : Based on MIL-DTL-38999 Series III

	-Shell Material	: Stainless Steel			
N	-Shell Plating	: Nickel			
	-Insulator	: Thermoplastic			
	-Contacts	: Copper Alloy			
	-Seals & Grommet	: Silicon Elastomer			
	-Contact Plating	: Gold over copper Alloy 0.8µm minimum			
	-Durability	: 500 Mating cycles			
	-Delivered with Souriau contacts and Accessories				
	-Temperature Range	-65°C to +200°C			
	-Salt Spray	: 500 hours			

: 51.03 g ± 10%

8D 0

G

15

S

05

В

F

В


Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
PP	4.39±0.2		
R1	24.61		
R2	23.01		
S	31±0.3		
V	20.83+0/-1.25		
W	2.1/2.5		
Z	31.5 Max		
VV THREAD	M22x1-6g		


ORIENTATION : B

CONTACT LAYOUT : 15-05

CONTACT TYPE : SOCKET(500 Matings)

Е



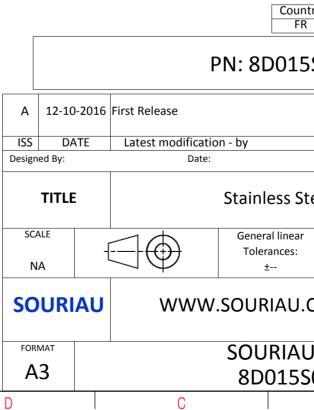

	Φ		А		
					4
AS EXA	AMPLE				3
s which er of t indation untry FR	non-conformit ch does not co he Parties or b on, technical n Jurisd	mply with by a third part			2
	I			MOD N°	<u> </u>
Stee	CUSTOMER DRAWING eel Receptacle 8D series NPRDS / PROJECT 859				
This document is the property of					1
	.COM SOURIAU it must not be reproduced or communicated without permission				
	DRG N°			SHEET	
50	5BB-C	1		1/2	J
	В		А		

		G	н г	m		0	
		Contact Layout					Panel Cutou
4	د. 	$E \oplus + \oplus B + E \oplus E$			Л	SQUARE FLANGE RECEPTACLE REAR MOUNTING	
		X-axis Y-axis (mm) (mm) +.000 (0.00) +.100 (2.54) +.174 (4.42) +.024 (0.61) +.094 (2.39) 148 (3.76) 094 (2.39) 148 (3.76) 174 (4.42) +.024 (0.61)			∑ ₹		ØT
ى نى							Dim ØA ØAA R1 ØT
						due to a us the Specificatior	I not be liable for any te of the Products wh ns issued by either of sional recommendat
0							PN: 8D0155
						2016 First Release	
					ISS DA Designed By:	TE Latest modificat Date	
					TITLE		Stainless Ste
_ _					SCALE NA	$\bigcirc \bigcirc$	General linear Tolerances: ±
					SOURI	AU WWW	V.SOURIAU.C
					FORMAT A3	I	SOURIAU 8D015S0
	Н	G	F	E	D	C	

