
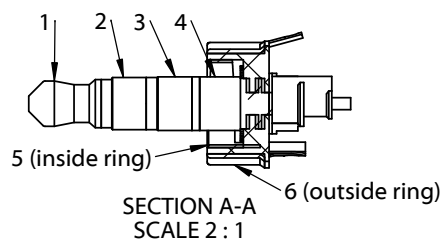


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	NOTES
1	50-00009	Connector, 3.5xL21.3 mm, 6C audio plug with double metal rings, brass gold plated	1	
2	30-00461	Wire, 6C TS, 26 AWG, 30V, 80C, 4.5 mm, shielded, TPE, 70A	1	
3	24-00104	PVC, black	1	

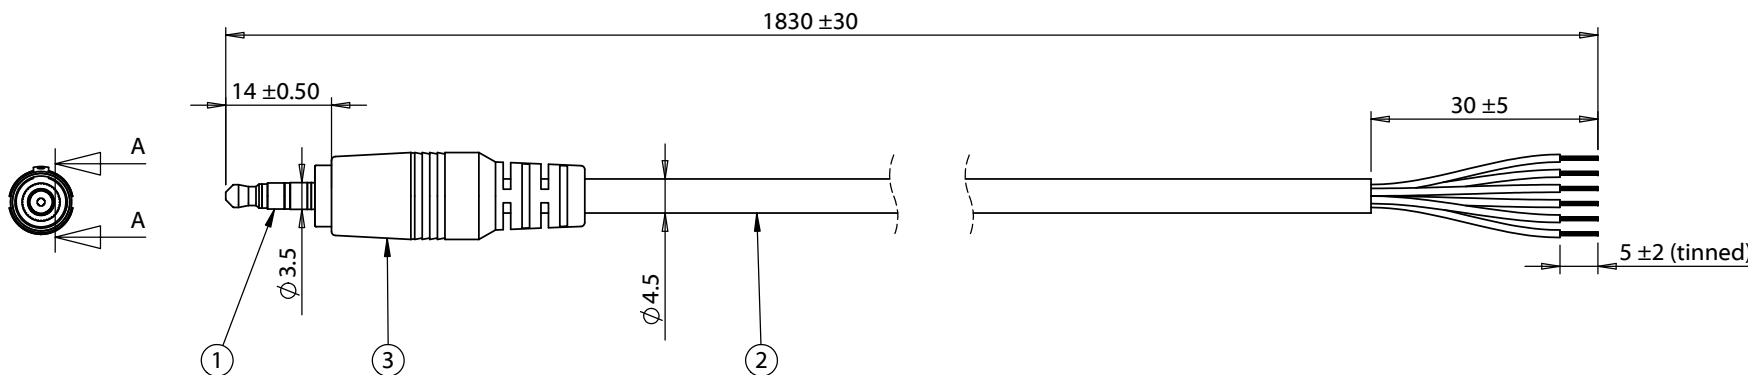

Wiring diagram	
50-00009	Wire Color
1	Red
2	Black
3	Yellow
4	White
5	Green
6	Blue

REVISION	DATE	DESCRIPTION	PREPARED:	NOTES	<h1>TENSILITY</h1> <p>20802 Sockeye Place #130 Bend, OR 97701 USA tel 541.323.3228 fax 541.323.4202 800 877.670.7118 www.tensility.com</p>		
A	1/19/2009	Initial release	PS <small>Digitally signed by PS DN: cn=PS, o=LA, email=QA009@tensility.com, c=US Date: 2016.02.22 16:46:17 -08'00'</small>	RoHS compliant			
A1	5/11/2009	added P/N 50-00009 to specification	VERIFIED: LA <small>Digitally signed by LA DN: cn=LA, o=Tensility, ou=Engineering, email=QA009@tensility.com, c=US Date: 2016.02.22 17:39:18 -08'00'</small>	Function test: no open, no reversed polarity, no short circuit, no INT	SIZE	PART NUMBER	
A2	8/30/2011	updated description and connector information		Functionally equivalent components may be used	A	053-0115R (CA-356CS)	
A3	1/9/2015	updated wire to TPE 30-00461	DIMENSIONS ARE IN MILLIMETERS	Drawing in third angle projected	SCALE: 1:1		
A4	10/27/2015	corrected overall length	TOLERANCES: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	DESCRIPTION: Cable, 1830 mm, 6C 3.5mm 50-00009 plug with ring to stripped tinned, 26 AWG, shielded, TPE 30-00461	SHEET 1 OF 1		