

Modification To A Standard Part

Modification Part Number

502A812 THRU 845 - G07

Modification Description (in words)

R TRIMMED

Dimensions:-

	R
	+/-10%
	b
502A812	33
502A823	40
502A834	50
502A845	50

All other Dimensions Conform To Standard Product .502A812 THRU 845. . .

Copy Of Standard Product S.C.D. Available On Request

Special Notes


When coating is added, entry diameters may be reduced by 2mm max.

**Copyright(!)
Urheberrechte**

The copyright in this drawing is the property of Raychem Ltd. The drawing is issued on condition that it is not copied, reproduced, or disclosed to a third party, either in whole or in part without the prior written consent of Raychem Ltd.

Drawn J. Haydon Checked *jh* Issue 1 Date March 1987Approval
Design *[Signature]*MKTG
R.W. Evansa.c. *[Signature]*Conforms to ISO Recommendations
3rd Angle Projection
Not to scale

Ordering Information

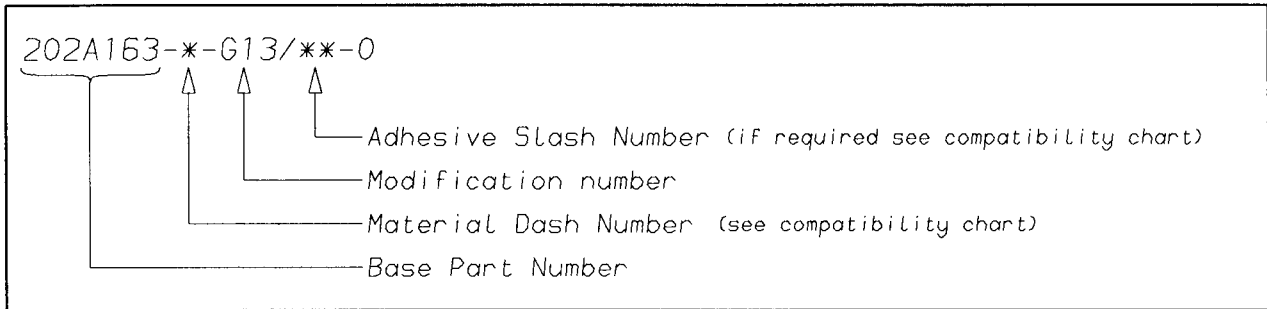

COMPATIBILITY CHART

MATERIAL DASH NUMBER	MATERIAL DESCRIPTION	COATING SLASH NUMBER
-3	POLYOLEFIN, SEMI-RIGID	/42 ,/86
-4	POLYOLEFIN, FLEXIBLE	/42 ,/86
-25	ELASTOMER, FLUID RESISTANT	/86,/225

AS SUPPLIED DIMENSIONS ARE FOR UNCOATED PARTS,
WHEN COATING IS ADDED, ENTRY DIAMETERS WILL REDUCE BY 1.5mm MAX.

Raychem
 Electronics OEM Division Europe
 Swindon, Wiltshire, England.
 Telephone: (01793) 528171 Fax: 573923