



RIM-5

Mechanical Relay Isolation Interface

The RIM-5 was designed for use in any application where you would like to replace a stand-alone thermostat with your building management system as well as any other similar application in which multiple isolation relays are needed. While some building management systems or controllers are equipped with relay contacts, many others have a Universal or TRIAC (Solid State) digital output. In the case where your building management system has a Universal or TRIAC output, the RIM-5 should be used to replace your thermostat contacts with up to five SPST pilot or isolation relays rated to a maximum contact rating of 10A in order to

control your end devices tied to the thermostat contacts. The RIM-5 will accept either a 12 VDC or 24 VAC power source by adjusting the field selectable jumpers in the field and also includes a "Status" LED indicator for each of the relays that can be used to aid in the trouble shooting of your mechanical equipment by displaying the current operating state of your mechanical equipment.

Applications: Digital Output Expansion, Alarms, Staging and Sequencing

The RIM-5 is covered by ACI's Five (5) Year Limited Warranty. The warranty can be found in the front of ACI's Sensors & Transmitters catalog, as well as on ACI's website, www.workaci.com.


PRODUCT SPECIFICATIONS

Coil Voltage:	12 VDC(+/- 30%), or 24 VAC, (+/- 10%), 50/60 Hz
Supply Current:	170 mA maximum
Coil Voltage Selection:	Jumper Selectable
Digital Output Type:	Five SPST Form "A" Relays
Relay Contact Rating:	Total current of all relay outputs used must be no greater than 2.44A
Relay Electrical Life:	100,000 operations minimum
Relay Mechanical Life:	10,000,000 operations
Connections:	Screw Terminal Blocks
Wire Size:	16 AWG (1.31 mm ²) to 26 AWG (0.129 mm ²)
Terminal Block Torque Rating:	0.5 Nm nominal 0.6 Nm (maximum)
Operating Temperature Range:	35 to 113°F (1.6 to 45°C)
Operating Humidity Range:	0 to 95% non-condensing
Storage Temperature:	-20 to 150°F (-40 to 65.5°C)
Snaptrack Material:	Polyvinyl Chloride (PVC)
Snaptrack Flammability Rating:	UL94 V-0
Product Dimensions:	(L) 4.90" (W) 3.25" (H) 1.18" (81.92 x 82.55 x 29.97 mm)
Product Weight:	0.30 lbs. (0.136 Kg)
Agency Approvals:	RoHS2, WEEE





DIMENSIONAL DRAWING

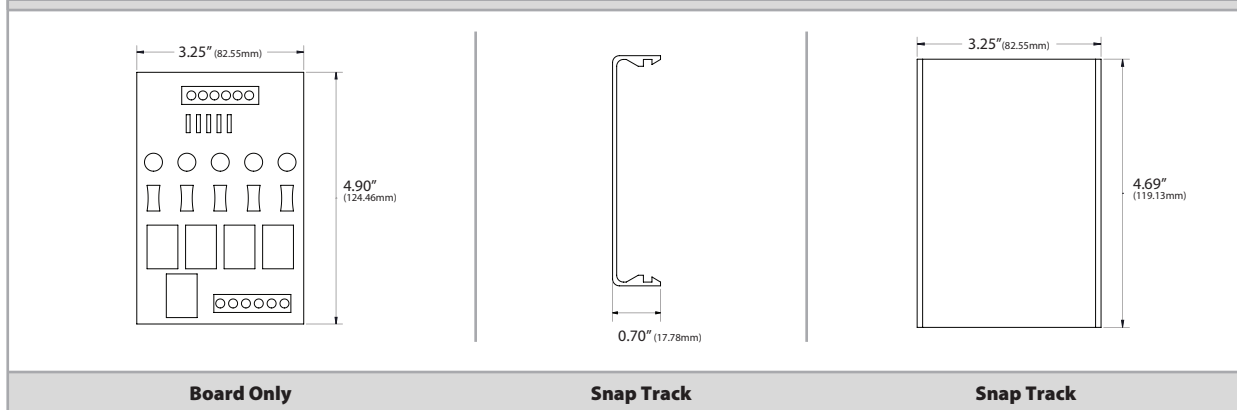

STANDARD ORDERING

Model # Example: **RIM-5** -OR- **138058**

Model #	Item #	Description
RIM-5	138058	Mechanical Relay Isolation Interface

ACCESSORIES

Model # Example: **A/DRC 4.69 X 3.25** -OR- **142620**

Model #	Item #	Description
A/DRC 4.69 X 3.25	142620	DIN Rail Adapter Kit

