


Ŧ	۵	п –	m	0

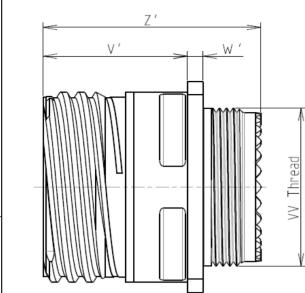

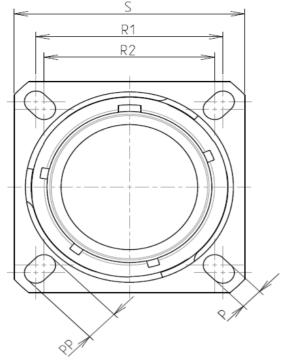



CHARACTERISTICS

4

ω

 \sim

_

T 0	ш Г	D	0	σ	A	
Z'	S R1 R2 R2 R2 R2 R2 R2 R2 R2 R2 R2 R2 R2 R2			NAS EXAMPLE		4
CHARACTERISTICS -Standard : Based on MIL-DTL-38999 Series III	Keying Shown as example Connector dimension Dim Nominal	-				
-Shell Material : Composite -Shell Plating : Nickel -Insulator : Thermoplastic -Contacts : Copper Alloy		SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.)				
-Seals & Grommet : Silicon Elastomer -Contact Plating : Gold over copper Alloy 0.8μm minimum -Durability : 500 Mating cycles	V' 19.5+1.4/-0 W' 2.1/3.65 Z' 32 Max VV THREAD M18x1-6g		Country Jurisdiction & Control List FR Not Listed			2
-Delivered with Souriau contacts and Accessories -Temperature Range65°C to +200°C						
-Salt Spray : 2000 hours		A 15-10-2016 ISS DATE Designed By:	Latest modification - by Date:	CI	USTOMER DRAWING	IOD N°
	TITLE	TITLE Composite Receptacle 8D series				
BASIC SERIES: 8D 0 - 13 M SHELL TYPE : Square Flange Receptacle	08 H C	SCALE NA	General li Tolerand ±		NPRDS / PROJECT 859	1
CONTACT TYPE : Standard Crimp Contact SHELL SIZE : 13	SOURIAU					
PLATING : M = Nickel		AYOUT : 13-08 FORMAT A3		IAU DRG N° .3M08HC-C	5	БНЕЕТ 1/2
H G I	F E	D	С	В	Α]

	<u>_</u>	۵	н Г	m		0
		Contact Layout				Panel Cutout
4	-x	$ \begin{pmatrix} \mathbf{G} \\ \mathbf{G} \\ \mathbf{G} \\ \mathbf{F} \\ \mathbf{G} \\ \mathbf{G}$			Λ	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
	Com posil II A B CC D E E F G G H	Uion D X-axis (mm) Y-axis (mm) A +.065 (1.65) +.157 (3.99) B +.170 (4.32) +.000 (0.00) C +.120 (3.05) 120 (3.05) D .000 (0.00) 170 (4.32) E 120 (3.05) 120 (3.05) F 170 (4.32) +.000 (0.00) S 065 (1.65) +.157 (3.99)			Σ	
ယ		mber of Size Service Contact Supersedes ntacts contacts rating location 8 20 I All MS20051-8				Dim ØA ØAA R1 ØT
						SOURIAU shall not be liable for any due to a use of the Products whi the Specifications issued by either of (professional recommendati
N						PN: 8D013N
					A 15-10-20 ISS DATE Designed By:	16 First Release Latest modification - by Date:
_					TITLE SCALE NA	Composite General linear Tolerances: ±
					SOURIA	
					FORMAT A3	SOURIAU 8D013M0
	Н	G	F	E	D	C

