



SIGN	DATE	DESCRIPTION	APPROVER
△	07.26.2012	Added mounting hole diameter	





THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

NOTES:

1. Rating: 300V 15A(UL)
2. Insulation Withstanding Voltage: AC2000V/MIN
3. Insulation Resistance: $\geq 500M\Omega$ or more at DC500V
4. Temperature Range: $-33^{\circ}C/+105^{\circ}C$
5. Screw Torque Value: 3.5 lbf-in(UL)
6. Wire Range: 14-22AWG
8. Housing: Nylon PA66
9. Screw M2.5, Steel, Zinc Plated
10. Standard Color: Natural
11. Wire Protector Material: Stainless Steel without plating
12. Terminal: Brass with Ni plating

Agency approvals:  


RoHS Compliant

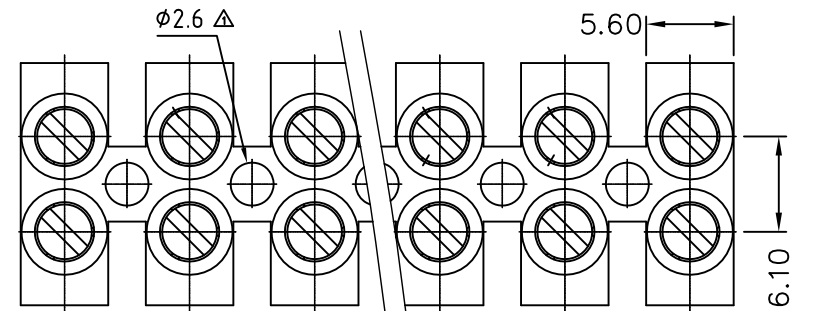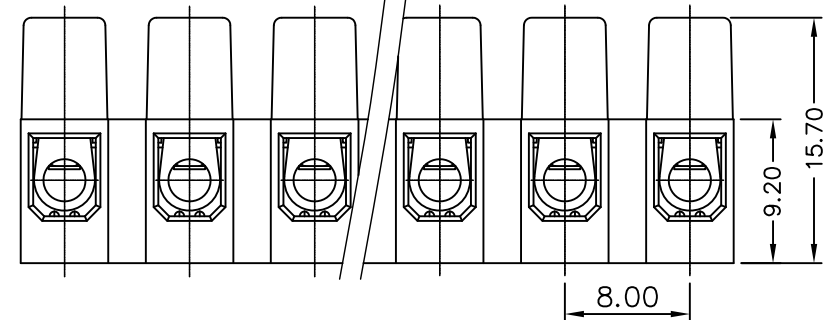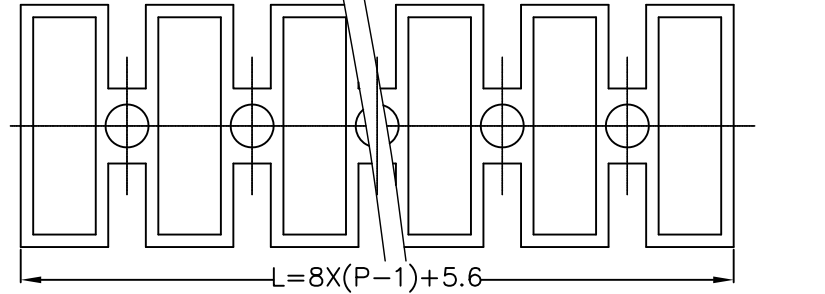

DIM	P	2	3	4	5	6	7	8	9	10	11	12
L		13.6	21.6	29.6	37.6	45.6	53.6	61.6	69.6	77.6	85.6	93.6
TOL (±)		0.08	0.12	0.16	0.20	0.24	0.28	0.32	0.36	0.40	0.44	0.48

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.

OST ON-SHORE TECHNOLOGY, INC.

TITLE		ES0800 Series - 8.0mm Euro Strip, Wire guard, flat base				
PART NO.	ES0800/XXDSFB (XX - number of poles per row)	DWG NO.	ES0800/XXDSFB.DWG			
APPROVED	CHECKED	DESIGNED	DRAWN	5020		Tolerance
KSZ 2007.08.01	KSZ 2007.08.01	KSZ 2007.08.01	KSZ 2007.08.01			.X ±0.15 .XX ±0.075 .XXX ±0.05
SHEET: 01/01				REV.: A		