



MA 001C (DB9M/25M ADAPTOR)  
 PIN OUT: 09Male 25Male

1	-----	8
2	-----	3
3	-----	2
4	-----	20
5	-----	7
6	-----	6
7	-----	4
8	-----	5
9	-----	22
G	-----	G

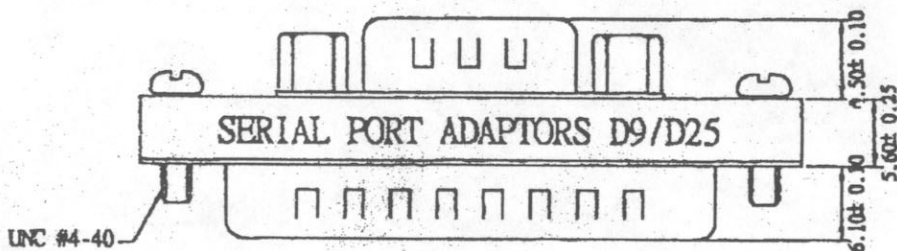


Label: orange color with white character  
 One side: SERIAL PORT ADAPTORS D9/D25  
 The other side: MINI ADAPTER  
 SPECIFICATION  
 INSULATOR: PBT Glass fibre reinforced UL 94 V0  
 CONTACT: Brass  
 CONTACT PLATING: Gold plated over nickel  
 SHELL: Tin plated shell  
 CURRENT RATING: 3 AMP  
 DIELECTRIC STRENGTH: 500V AC for one minute  
 INSULATOR RESISTANCE: 500M $\Omega$  min at 500V DC  
 TEMPERATURE: -25 $^{\circ}$ C — +105 $^{\circ}$ C

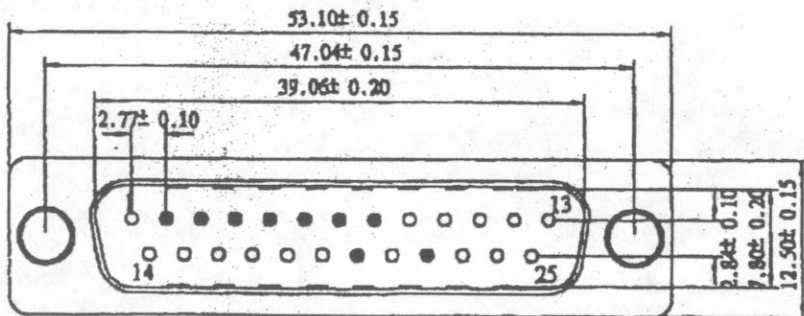

AB467

Edition A01  
 SCALE 2:1  
 UNIT mm  
 Page 1/1



ASSMANN

DATE 8/Dec-2001

DRAWN

*Fu Hao*

CHECKED

APPRD

2001/12/8

DATE

REVISION

DESCRIPTION

Customer