

Ratings

Voltage: 300 V
 Temperature: -10 to 105 °C
 Flammability: VW-1

Conductor

Conductor count: 2
 Gauge: 14 AWG 2.08 mm²
 Material: tinned copper strands
 Strand size: Ø 0.254 mm x 41

Outer jacket

Material: PVC/52P
 Color: red and black
 Diameter: 6 ±0.20 mm (3.0±0.15 x 2)
 Nominal thickness: 0.53 mm

Electrical requirements

Voltage test: 300 V
 Spark test: 3.0 kV
 Conductor maximum resistance at 20 °C: 8.96 ohms/km
 Jacket resistance at 20 °C: 2.5 Mohms/km
 Dielectric test: 2000 Vac for 1 minute with no breakdown



Mechanical requirements

Jacket tensile strength: 1.05 kgf/mm²
 After aging at 136±2 °C for 7 days:
 Minimum tensile strength 70% of original
 Minimum elongation 65% of original

Environmental requirements

Heat shock: 136±1 °C/1 hour, no observed degradation
 Deformation: 136±1 °C/1 hour, ≤50%
 Cold bend: -10±2 °C/1 hour, no observed cracking

Wire marking: E339579 UL AWM STYLE 2651 14 AWG 105°C 300V VW-1 --- cUL AWM I A 105°C 300V FT1 TENSILITY

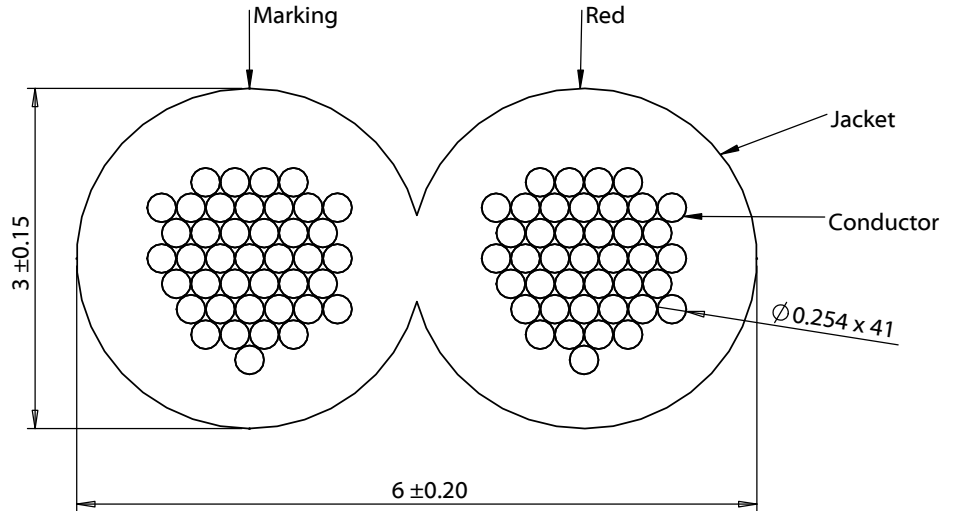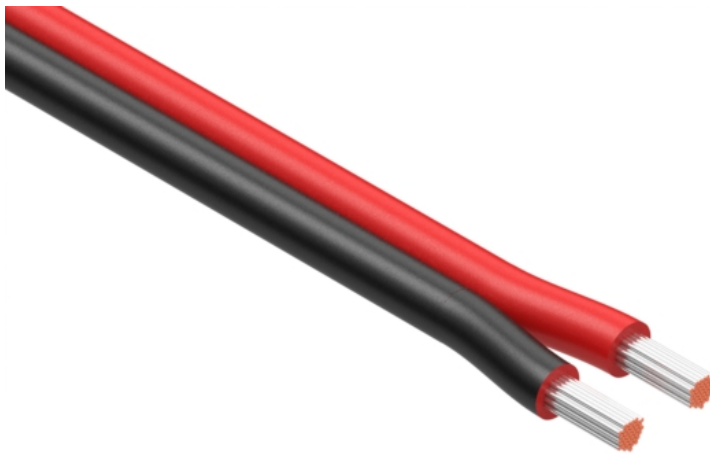

Revision:	Date:	Description:
A	6/16/2022	Initial release

Prepared:

Verified:

Dimensions are in millimeters.
 Tolerances:
 X: ± 0.5 mm
 X.X: ± 0.3 mm
 X.XX: ± 0.05 mm

Notes:

RoHS compliant

Function test: no open, no short circuit, no intermittent

Description:
 Wire, 2C TS, 14 AWG, UL2651, 300V, 105C, 6.0 mm, VW-1, PVC, red and black

TENSILITY

tel 1.541.323.3228 800 877.670.7118
 fax 1.541.323.4202 web tensility.com

Size: A Part number: 30-02616

Scale: 15:1 Sheet 1 of 1