




OXY5741A

Ruggedised open-standard EBX SBC expansion,
Extended temperature -40°C to 85°C

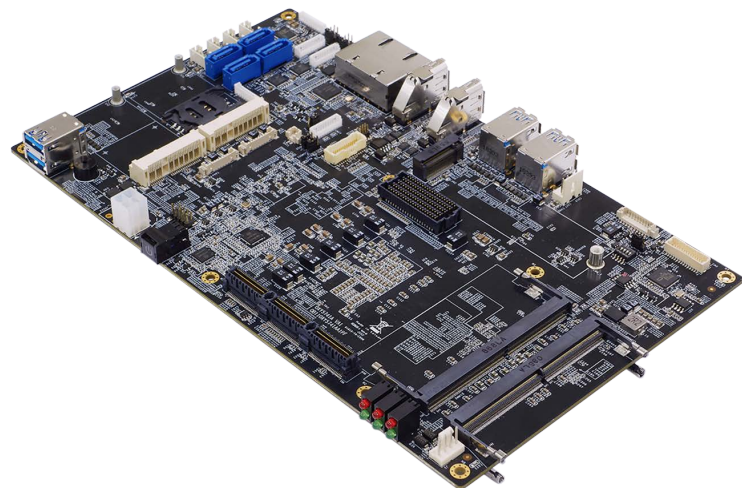

- i5-8400H/i7-9850HL/i7-9850HE/E-2276MELE-2276ME Processor
- PCIe/104 stackable bus structure(Type 2)
- FPE connector
(1 *PCIe x 16 or 2* PCIe x8 or 1*PCIe x8+2*PCIe x4)
- 4 x DDR4 2400MHz SODIMM up to 128GB
- 2 x Full size Mini PCIe ; 1 xM.2 M-key
- Multi Display: 3 x Display Port, 1 x Dual Channe 24bit LVDS
- 4 x USB 3.1 Gen. 2(10Gbps), 2 x USB 3.0, 2 x USB 2.0
- Extended temperature -40°C to 85°C

Specifications

System

CPU	Core™ i7-9850HE Processor (6 Cores/12 Threads, 9M Cache, up to 4.40 GHz), 45W Core i7-9850HL (6 Cores/12 Threads, 9M Cache, up to 4.10 GHz), 25W XEON E-2276M (4 Cores/8 Threads, 12M Cache, up to 4.70 GHz), 45W XEON E-2276ML(6Core/12Threads ,12M Cache , up to 4.20GHz),25W Core™ i5-8400H Processor (6 Cores/12 Threads, 8M Cache, up to 4.20 GHz) TDP: 45W
Memory type	4 x DDR4 2400MHz SODIMM up to 128GB
Chipset	Intel® UHD Graphics 630
BIOS Core	AMI® UEFI BIOS
BIOS Flash	SPI Flash
Super I/O	ITE 8786
TPM	SLB9665 TPM 2.0
iAMT	iAMT 12.0
Watchdog	1-255 sec. or 1-255 min. software programmable and can be generate system reset

Display

Display Port	Resolution up to 4096 x 2304
Chipset	Intel® UHD Graphics 630
Video Memory	Shared Memory
LVDS	1* Dual Channel 24bit LVDS (w/auto-dimming support)

Audio

Codec	ALC887
-------	--------

Expansion Slot

M.2	1 x M.2 (M-key, type:2280, SATA/PCIe 3.0x4 NVMe)
miniPCIe	2 x Full size (PCIe x1,USB 2.0 and micro SIM Card)
PCIe/104	TYPE 2
FPE	1 x FPE slot.

Ethernet

Chipset	Intel® I210 & I219LM GbE LAN (10/100/1000 Mbps supported)
---------	--

Disable LAN through BIOS	Yes
--------------------------	-----

WOL	Yes
-----	-----

Boot from LAN	Yes for PXE
---------------	-------------

Rear I/O

Display Port	2*DIP Display Port Female 20P 90D UPRIGHT
--------------	---

USB3.0	2*DIP Double USB3.0 A Type
--------	----------------------------

LAN	CONN DIP RJ45 1x2 Tab up w/Transformer 10/100/1000 Base-T w/LED Female
-----	--

FRONT I/O

USB3.0(2.0)	1*DIP Double USB3.0(2.0), A Type
-------------	----------------------------------

LED (Red/Green)	6 (HDD, 2 x LAN ACT+LINK) RED/GREEN LED
-----------------	---

Power Button	1 (with LED)
--------------	--------------

Internal I/O header (No Edge I/O Needed)

SATA	4x SATAIII (RAID 0,1,5) , from 2 up to 4 ports
------	--

SATA power	4
------------	---

LVDS	1 (1 x 30pin) or equal ---> W/Auto-dimming supports), Brightlight control
------	---

Inverter connector	1 (1 x 10pin)
--------------------	---------------

VGA	N/A
-----	-----

DVI-I	N/A
-------	-----

DisplayPort	1 x DP from CPU
-------------	-----------------

8 bit GPIO	1 (1 x 10pin)
------------	---------------

COM	2 x RS232/422/485 (2 x 10pin)
-----	-------------------------------

SIM card holder	1 (Micro SIM) in mPCI slot
-----------------	----------------------------

USB 2.0	2 x (2x5Pin) box header
---------	-------------------------

USB 3.0	N/A
---------	-----

LAN	N/A
LAN LED	N/A
LPC	1
Front Panel	1 (2 x 5pin) Power BTN/HDD LED/Reset BTN/PWR LED
Smart Fan	1 x CPU Fan --->1 x 4-pin for CPU(PWM mode)
Audio (Line-out, MIC)	1 (1 x 10pin)
Battery	1---> 1 x RTC battery holder
Power Connector	1 (4 x 2pin) horizontal type

Mechanical and Environmental

Form Factor	EBX
Power Type	DC-12V
Power Consumption	250W
Dimension	146 mmX 243mm
Operating Temperature	-20°C ~ 60°C
Storage Temperature	-40°C ~ 85°C
Relative humidity	10% to 90%, non-condensing

Standard Compliance

Standard Compliance	CE/FCC
---------------------	--------

Ordering Information

Model	Description
OXY5741A-01	Intel® Core i7-9850HE processor, EBX SBC, W/PCIe/104 expansion module
OXY5741A-02	Intel® Core i7-9850HL processor, EBX SBC, W/PCIe/104 expansion module
OXY5741A-03	Intel® XEON E-2276ME processor, EBX SBC, W/PCIe/104 expansion module
OXY5741A-04	Intel® XEON E-2276ML processor, EBX SBC, W/PCIe/104 expansion module
OXY5741A-05	Intel® Core i5-8400H processor, EBX SBC, W/PCIe/104 expansion module

Block Diagram

