

т	۵	<b>п</b>	m	0



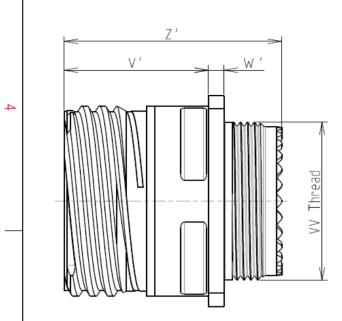

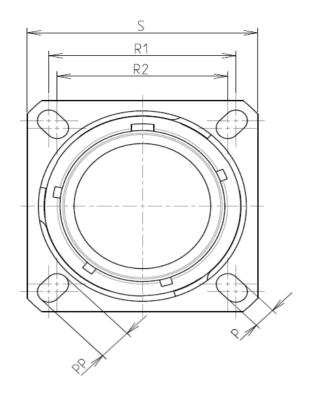

LAYOUT SHOWN AS

Keying Shown as example

## CHARACTERISTICS

ယ

 $\sim$ 

-Mass

BASIC SERIES:

SHELL SIZE : 11

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : J = Olive drab Cadmium

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Composite			
-Shell Plating	: Olive drab Cadmium			
-Insulator	: Thermoplastic			
-Contacts	: Copper Alloy			
-Seals & Grommet	: Silicon Elastomer			
-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum			
-Durability	: 500 Mating cycles			
-Delivered with Souriau contacts and Accessories				
-Temperature Range	<sub>∶</sub> -65°C to +175°C			
-Salt Spray	: 2000 hours			

: 13.3 g ± 10%

8D 0

G

11

J

04

S


F

D

Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
PP	4.93±0.2		
R1	20.62		
R2	18.26		
S	26.2±0.3		
۷'	19.5+1.4/-0		
W'	2.1/3.65		
Ζ'	32 Max		
VV THREAD	M15x1-6g		

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recommend

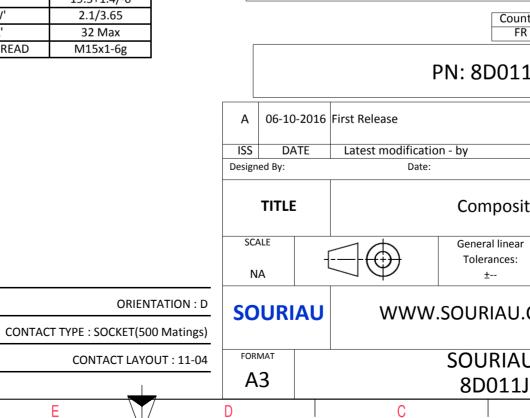

σ	1	A			
				4	
S EXAMPLE	3			3	
any non-conformin which does not co or of the Parties or I dation, technical n	mply with by a third party otice.)				
Intry Jurisc	liction & Contr Not Listed	ol List		2	
LJO4SD					
			MOD N°		
	CUSTOMER	DRAWING			
ite Receptac	e Receptacle 8D series				
ar	NPRDS / PROJECT 859				
.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission				1	
U DRG N°	1		SHEET		
JO4SD-C		A	1/2	J	
5		/ \			

_	Ŧ	۵	п –	m	D	0	
		Contact Layout				ł	Panel Cutou
4	-×_	$ \begin{array}{c}                                     $			ħ	SQUARE FLANGE RECEPTACLE (TYPE 0)	
	Shell Arrangement Numt size no. cont size 4	X-axis (mm)         Y-axis (mm)           + 0.65 (1.65)         .065 (1.65)           + 0.65 (1.65)         - 0.65 (1.65)           - 0.65 (1.65)         - 0.65 (1.65)           - 0.65 (1.65)         - 0.65 (1.65)           - 0.65 (1.65)         - 0.65 (1.65)           - 0.65 (1.65)         - 0.65 (1.65)           - 0.65 (1.65)         - 0.65 (1.65)           - 0.65 (1.65)         - 0.65 (1.65)           - 0.65 (1.65)         - 0.65 (1.65)           - 0.65 (1.65)         - 0.65 (1.65)           - 0.65 (1.65)         - 0.65 (1.65)	]			ØA	<u>Ø</u> T
co						Dim ØA ØAA R1 ØT	A
	F					SOURIAU shall not be li due to a use of the F the Specifications issued (professional rec	Products wh by either of
N							Countr FR
					A 06-10-20 ISS DATE	116 First Release	3D011J
					Designed By: TITLE SCALE	Date:	omposite
					NA SOURIA		eral linear lerances: ±
		-	_		FORMAT A3	81	URIAU D011J0
	Н	l G	l F	E \	D	C	

