

BG-MFVS61-G2

6-input 3G-SDI and HDMI Video Mixer and Production Switcher w/ Integrated Capture (Available in black)

The compact yet powerful BG-MFVS61-G2 production switcher is the ideal device for mobile events or situations where space might be limited. Lightweight and portable, this unit is designed for multi-camera live streaming.

Whether placed in a small studio, large house of worship, or mobile video production, the advanced features and intuitive controls of the BG-MFVS61-G2 allow anyone from volunteers to seasoned pros to consistently deliver high-quality production.



Instant Control at Your Fingertips


- T-bar slider, auto, and cut buttons create slick transitions from preview to program utilizing the built-in wipe, mix, and fade effects.
- Multiview outputs (1x SDI, 1x HDMI): simultaneously monitor all six inputs and your preview/program sources on a single display
- Output to multiple devices with simultaneous HDMI, SDI, and USB program outputs
- PIP Mode Adjustable size and position.

Synergetic Technologies & Connections

- 4x SDI and 2x HDMI inputs connect virtually any HD video device
- Integrated scaler outputs a 1080p60 image regardless of input resolution
- Integrated USB capture function streams directly to social media platforms
- Integrated Audio Mixer: 3.5 mm, RCA, HDMI audio

Quality Construction and Detail

- Solid, durable case ensures reliability for mobile production and permanently installed environments
- Lightweight and portable
- Enhanced buttons & LCD backlights

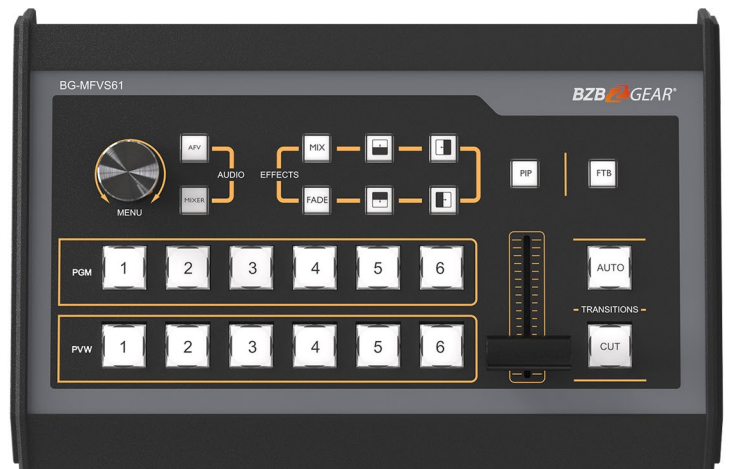

Specifications

Inputs:	
Video Inputs	P4×3G/HD/SD-SDI, 2×HDMI 1080p 60/59.94/50/30/29.97/25/24/23.98 1080psF 30/29.97/25/24/23.98
SDI Input Format	1080i 60/59.94/50 720p 60/59.94/50/30/29.97/25/24/23.98
HDMI Input Format	1080p 60/59.94/50/30/29.97/25/24/23.98/23.976 1080i 50/59.94/60 720p 60/59.94/50/30/29.97/25/24/23.98 576i 50, 576p 50
SDI Video Rate	Auto detection, SD/HD/3G-SDI
SDI Compliance	SMPTE 259M/ SMPTE 292M/ SMPTE 424M SDI: YUV 4:2:2, 10-bit;
Color Space and Precision	HDMI: RGB 444 8/10/12bit; YUV 444 8/10/12bit; YUV 422 8/10/12bit
Outputs:	
PGM Outputs	PGM Outputs
PGM Output Format	1080p 60/50/30/25/24; 1080i 50/60
Multiview Output	1×3G-SDI; 1×HDMI Type A
Multiview Output Format	1080p 60
Audio:	
Audio Input	1×3.5mm Stereo audio; 1×RCA(L/R)
Audio Output	1×3.5mm Stereo audio; 1×RCA(L/R)
Others:	
GPIO	Tally
LAN	RJ45
Power	DC 12V, 1.8A
Consumption	≤ 22W
Operation Temperature	-20°C~60°C
Storage Temperature	-30°C~70°C
Operation Humidity	20%~70%RH
Dimension	330×243.5×67mm
Weight	2.2 lbs

Industry-Leading Warranty & Support

BZBGear Pro AV products and Cameras come with a three-year warranty. An extended two-year warranty is available for our Cameras upon registration for a total of five years.

We pride ourselves in our Customer Service and seven-days-a-week Tech Support.

Pro AV 3 Year Warranty	Cameras 5 Year Warranty	Lifetime Product Support
-------------------------------------	--------------------------------------	------------------------------------