

Ratings

Voltage: 300 V
 Temperature: -80~200 °C
 Flammability: VW-1
 Oil resistant: 60°C
 ≥50% elongation and tensile strength after aging

Conductor

Conductor count: 1
 Gauge: 24AWG 0.22 mm²
 Material: tinned copper strands
 Strand size: $\varnothing 0.2\text{mm} \times 7$
 Resistance at 20 °C: 94.2 Ω /km max


Insulator

Material: Fluorinated ethylene propylene (FEP)
 Color: brown
 Diameter: $\varnothing 1.26 \pm 0.1$
 Nominal thickness: 0.33 mm
 Resistance at 20 °C: 2.5 M Ω /kft min

Wire marking: E339579 UL AWM STYLE 1332 24AWG 200°C 300V
 VW-1 --- cUL AWM I A/B 200°C 300V FT1 TENSILITY

Mechanical Tests

After aging at 232±1°C for 7 days
 Minimum tensile strength 1.76 kgf/mm²
 Minimum elongation 200% original

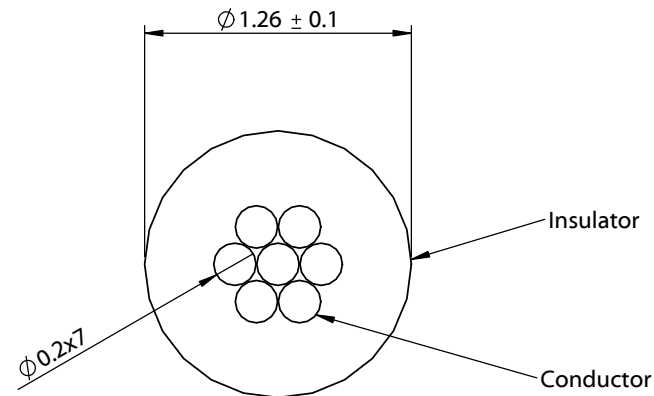

Revision:	Date:	Description:	Prepared:	Notes:	TENSILITY tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com
A	5/20/2022	Initial release	Verified:	RoHS compliant Function test: no open, no short circuit, no intermittent	
			Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Description:	Size: Part number:
				Wire, hook-up, TS, 24 AWG, UL 1332, 300V, 200C, 1.26 mm, FEP, brown	A 30-02580
				Scale: 28:1	Sheet 1 of 1

5

4

3

2

1