


- 1 THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
- 2 POINT OF MEASUREMENT FOR PLATING THICKNESS.
- 3 ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
- 4 BREAKAWAY NOTCH ANGLE CAN BE ORIENTED TO THE RIGHT (AS SHOWN) OR TO THE LEFT
- 5 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

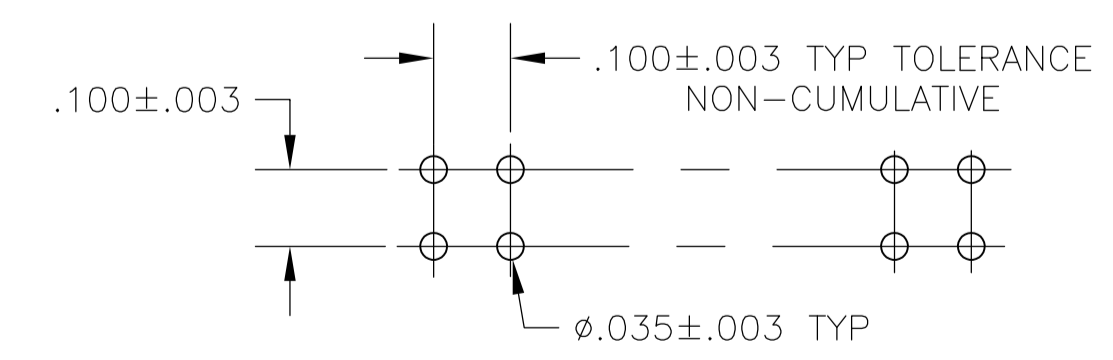

RECOMMENDED HOLE LAYOUT

	3.984	3.900	39	80	4-103149-0
	3.884	3.800	38	78	-3-103149-9
	3.784	3.700	37	76	-3-103149-8
	3.684	3.600	36	74	-3-103149-7
5 SUPERSEDED BY 8-146308-6	3.584	3.500	35	72	-3-103149-6
	3.484	3.400	34	70	-3-103149-5
	3.384	3.300	33	68	-3-103149-4
	3.284	3.200	32	66	-3-103149-3
	3.184	3.100	31	64	-3-103149-2
	3.084	3.000	30	62	-3-103149-1
	2.984	2.900	29	60	-3-103149-0
	2.884	2.800	28	58	-2-103149-9
	2.784	2.700	27	56	-2-103149-8
	2.684	2.600	26	54	-2-103149-7
	2.584	2.500	25	52	-2-103149-6
	2.484	2.400	24	50	-2-103149-5
	2.384	2.300	23	48	-2-103149-4
	2.284	2.200	22	46	-2-103149-3
	2.184	2.100	21	44	-2-103149-2
	2.084	2.000	20	42	-2-103149-1
	1.984	1.900	19	40	2-103149-0
	1.884	1.800	18	38	-1-103149-9
	1.784	1.700	17	36	-1-103149-8
	1.684	1.600	16	34	-1-103149-7
5 OBSOLETE	1.584	1.500	15	32	-1-103149-6
	1.484	1.400	14	30	-1-103149-5
5 OBSOLETE	1.384	1.300	13	28	-1-103149-4
	1.284	1.200	12	26	-1-103149-3
	1.184	1.100	11	24	-1-103149-2
	1.084	1.000	10	22	-1-103149-1
	.984	.900	9	20	1-103149-0
5 OBSOLETE	.884	.800	8	18	103149-9
	.784	.700	7	16	103149-8
	.684	.600	6	14	103149-7
	.584	.500	5	12	103149-6
	.484	.400	4	10	103149-5
5 OBSOLETE	.384	.300	3	8	103149-4
	.284	.200	2	6	103149-3
5 SUPERSEDED BY 5-146308-2	.184	.100	1	4	103149-2
5 OBSOLETE	.084	—	—	2	103149-1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DIN	H. MOLL	23OCT87
DIMENSIONS: INCHES		CHK	T. CLARK	23OCT87
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	T. CLARK	29OCT87
0 PLC	± -	NAME		
1 PLC	± -	HEADER ASSY, MOD II, BREAKAWAY, DOUBLE ROW, .100X.100 C, RIGHT ANGLE, WITH .025 SQ POSTS		
2 PLC	± -	SIZE	A1	SCALE
3 PLC	± .005	WEIGHT	—	4:1
4 PLC	± -	CAGE CODE	—	103149
ANGLES	± -	DRAWING NO	—	1
MATERIAL: HOUSING: FLAME RETARDANT THERMOPLASTIC; COLOR:BLACK; POST: COPPER ALLOY		RESTRICTED TO	—	
FINISH: POST: .00050 GOLD IN THE CONTACT AREA; .00100 TO .00200 WHITE IN LAD ON THE SOLDER TAIL; ALL OVER .00050 NICKEL		CUSTOMER DRAWING	SHEET	1 OF 1