


OPERATING TEMPERATURE: -55°C TO +85°C


CURRENT RATING: CONTACT RESISTANCE: **INSULATOR RESISTANCE:** DIELECTRIC WITHSTANDING VOLTAGE: 1000V AC rms

CONTACT:

3A PER CONTACT 25mΩ MAX. $5000M\Omega$ min.

COPPER ALLOY, 30µ GOLD PLATING

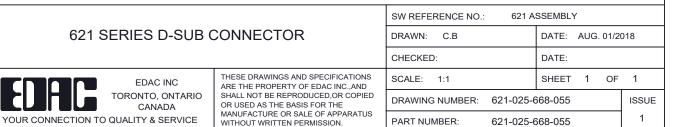

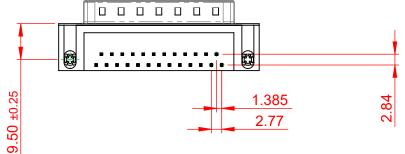

COMPLIANT

THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

