


Actuator Options



FEATURES:

- Durable, Robust and Economical
- Easily Customized Actuator
- High Power Ratings
- Engineered For Use as a Foot Switch
- Popular Industry Design

SPECIFICATIONS:

RATING: *RATING OPTION C:*
16A 125/250VAC [UL, cUL]

RATING OPTION J:
16A 125/250VAC [UL, cUL]

TEMPERATURE: -20°C to 125°C


ELECTRICAL LIFE: 10,000 Cycles

CONTACT RESISTANCE: 20mΩ Max. at 1A 5VDC


INSULATION RESISTANCE: 100MΩ Min. at 500VDC

Dielectric Strength: 1,000VAC for 1 Minute


Terminal Options




4.8mm Tab




Solder



PCB Pins
(8.0mm Spacing)








PCB Pins
(6.3mm Spacing)



Horizontal
4.8mm Tab

Mounting Options

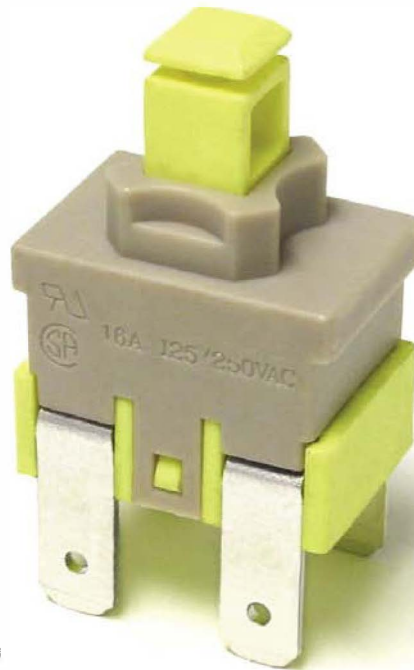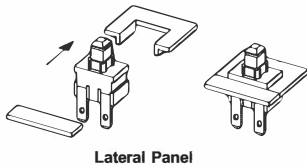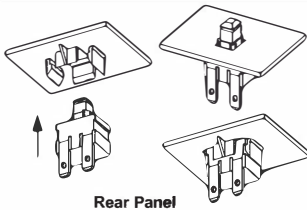


PA512C



PA524C

Series



PA5 - Snap-in Actuator
PA5F - Flat Actuator

Terminal



- 1 - 4.8mm Tab
- 2 - Solder
- 3 - PCB Pins (8.0mm Spacing)
- 4 - PCB Pins (6.3mm Spacing)
- 5 - Horizontal 4.8mm Tab

Function



- 1 Pole:
1 - Off/On
4 - Off-(On)
- 2 Pole:
2 - Off-On
E - Off(On)

Rating



- C - 16A 125/250VAC [UL, CSA]
16(4)A 250V- 1E4 [ENEC]
- J - 16A 125/250VAC [UL, CSA]
16(8)A 250V- 1E4 [ENEC]

EXAMPLE PART NUMBERS:

- PA511C 1P Off-On
4.8mm Tab Terminals, Snap-In Actuator
- PA512C 2P Off-On
4.8mm Tab Terminals, Snap-In Actuator
- PA514C 1P Off-(On)
4.8mm Tab Terminals, Snap-In Actuator
- PA51EC 2P Off-(On)
4.8mm Tab Terminals, Snap-In Actuator

