

# ACTIVE 3X FREQUENCY MULTIPLIER (CONT.)

## MODEL: SYS3X3738

### FEATURES


- High fundamental rejection..... -70 dBc
- Output power..... +16 dBm
- Packaging ..... Hermetically sealed

### ELECTRICAL SPECIFICATIONS

INPUT PARAMETERS	CONDITION	UNITS	MIN.	TYP.	MAX.
RF frequency range		GHz	12.5		12.9
RF VSWR	50 ohm reference	Ratio		2.1:1	
RF power range		dBm		+13	
V+ bias voltage	@ 200 mA max.	VDC	9		16
V- bias voltage	@ 20 mA max.	VDC	-9		-16
TRANSFER CHARACTERISTICS	CONDITION	UNITS	MIN.	TYP.	MAX.
Output power		dBm	+12	+16	
Fundamental leakage	Input	dBc		-70	-50
Second-harmonic leakage	Input	dBc		-75	
OUTPUT PARAMETERS	CONDITION	UNITS	MIN.	TYP.	MAX.
RF frequency range		GHz	37		38
RF VSWR	50 ohm reference	Ratio		2.1:1	

NOTE: Test data supplied at 25°C; fundamental rejection, output power and second-harmonic leakage.

### OUTLINE DRAWING

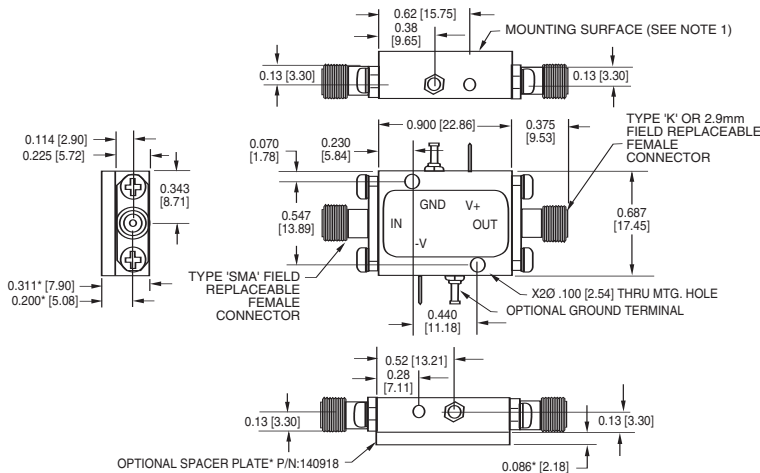

- NOTES: 1. Unit's mounting surface shall be attached to a heatsink capable of dissipating the devices power consumption without exceeding the operating temperature limits.  
 2. All dimensions shown in brackets [ ] are in millimeters.

### MAXIMUM RATINGS

Specification temperature..... +25°C  
 Operating temperature ..... -40 to +65°C  
 Storage temperature..... -65 to +95°C

### ADD SUFFIX TO MODEL NO.

WG (WR28)  
 S

### OPTIONS

WR28 output waveguide  
 Single positive supply

