


product type designation

product description

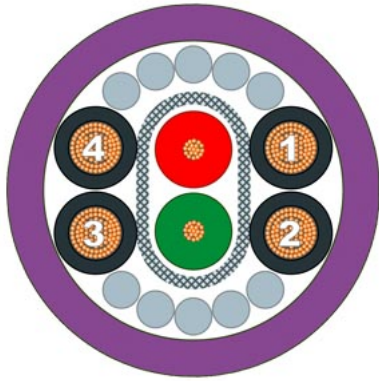

PROFIBUS ECOFAST Hybrid Cable GP

ECOFAST Hybrid cable (data and energy wires), preferred length, assembled with ECOFAST connector and socket

PROFIBUS ECOFAST Hybrid Cable GP, 2xCu 0.64 mm, 4x Cu 1.5 mm², Cable pre-assembled with ECOFAST plug and socket, trailable, length 0.5 m.

suitability for use	Hybrid cable for connection of ECOFAST stations, UL approval
cable designation	02Y (ST)C 1x2x0.65/2.56 -150 LI IY-Z Y 4x1x1.5 VI
wire length	0.5 m
electrical data	
attenuation factor per length	
• at 9.6 kHz / maximum	0.003 dB/m
• at 38.4 kHz / maximum	0.004 dB/m
• at 4 MHz / maximum	0.025 dB/m
• at 16 MHz / maximum	0.049 dB/m
impedance	
• rated value	150 Ω
• at 9.6 kHz	270 Ω
• at 38.4 kHz	185 Ω
• at 3 MHz ... 20 MHz	150 Ω
relative symmetrical tolerance	
• of the characteristic impedance at 9.6 kHz	10 %
• of the characteristic impedance at 38.4 kHz	10 %
• of the characteristic impedance at 3 MHz ... 20 MHz	10 %
loop resistance per length / maximum	138 Ω/km
shield resistance per length / maximum	15 Ω/km
insulation resistance coefficient	20 GΩ·m
operating voltage / maximum	80 V
capacity per length / at 1 kHz	30 pF/m
operating voltage / RMS value	600 V
conductor cross section / of the power line	1.5 mm ²
continuous current / of the power lines	12 A
mechanical data	
design of the shield	Overlapped aluminum-clad foil, sheathed in a braided screen of tin-plated copper wires
number of electrical cores	6
type of electrical connection / FastConnect	No
outer diameter	
• of inner conductor	0.67 mm
• of the wire insulation	2.56 mm
• of cable sheath	11 mm
symmetrical tolerance of the outer diameter / of cable sheath	0.3 mm

material	
<ul style="list-style-type: none"> of the wire insulation of cable sheath 	polyethylene (PE) PVC
color	
<ul style="list-style-type: none"> of the insulation of data wires of the power line insulation of cable sheath 	red / green Black Violet
bending radius	
<ul style="list-style-type: none"> with multiple bends / minimum permissible 	110 mm
number of bending cycles	1000000; For use in cable carriers, for 1 million bending cycles with a bending radius of 166 mm (15x D) and an acceleration of 4.0 m/s ²
tensile load / maximum	300 N
weight per length	154 kg/km
ambient conditions	
ambient temperature	
<ul style="list-style-type: none"> during operation during storage during transport during installation note 	-30 ... +80 °C -30 ... +80 °C -30 ... +80 °C -30 ... +80 °C Electrical properties measured at 20 Cel, verification according to DIN 47250 part 4 respectively DIN VDE 0490
fire behavior	flame-retardant according to IEC 60332-3-24 (Category C)
chemical resistance	
<ul style="list-style-type: none"> to mineral oil to grease 	Conditional resistance Conditional resistance
radiological resistance / to UV radiation	resistant
protection class IP	IP65
product features, product functions, product components / general	
product feature	
<ul style="list-style-type: none"> halogen-free silicon-free 	Yes Yes
standards, specifications, approvals	
UL/ETL listing / 300 V Rating	No
UL/ETL style / 600 V Rating	Yes; CM / CL3 / SunRes / OilRes
certificate of suitability	
<ul style="list-style-type: none"> EAC approval RoHS conformity 	Yes Yes
further information / internet-Links	
Internet-Link	
<ul style="list-style-type: none"> to web page: selection aid TIA Selection Tool to website: Industrial communication to website: Industry Mall to website: Information and Download Center to website: Selection guide for cables and connectors to website: Image database to website: CAX-Download-Manager to website: Industry Online Support 	http://www.siemens.com/tia-selection-tool http://www.siemens.com/simatic-net https://mall.industry.siemens.com http://www.siemens.com/industry/infocenter https://sie.ag/2QdlxcP http://automation.siemens.com/bilddb http://www.siemens.com/cax https://support.industry.siemens.com
last modified:	5/21/2021 