

SUMMARY



Image is for illustrative purpose only

Wires

Low voltage 36

Series 1R
Termination type Female crimp
IP rating 50
AWG wire size 26.00 - 22.00
Cable Ø 2.00 - 9.20 mm
Status active
Matching parts [FGG.1R.336.GLC92](#)

Download

[Request a quote](#)
[Catalog](#)

TECHNICAL DETAILS

Mechanics

Shell Style/Model EGG*: Fixed receptacle, key (G) or key (A)
Keying 3 keys (alpha=50,beta=30, plug: male contacts, receptacle: female contacts)
Housing Material Crastin® PBT (Polybutylene terephthalate), gray
Weight 15.12 g

Performance

Configuration 1R.336 : 36 low voltage
Insulator L: PEEK (UL 94 / V-0/1.5)
Rated Current 2.5 Amps


Specifications

Contact Type: Crimp
Test voltage (kV rms) Contact-contact: 1.5

Others

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

DRAWINGS

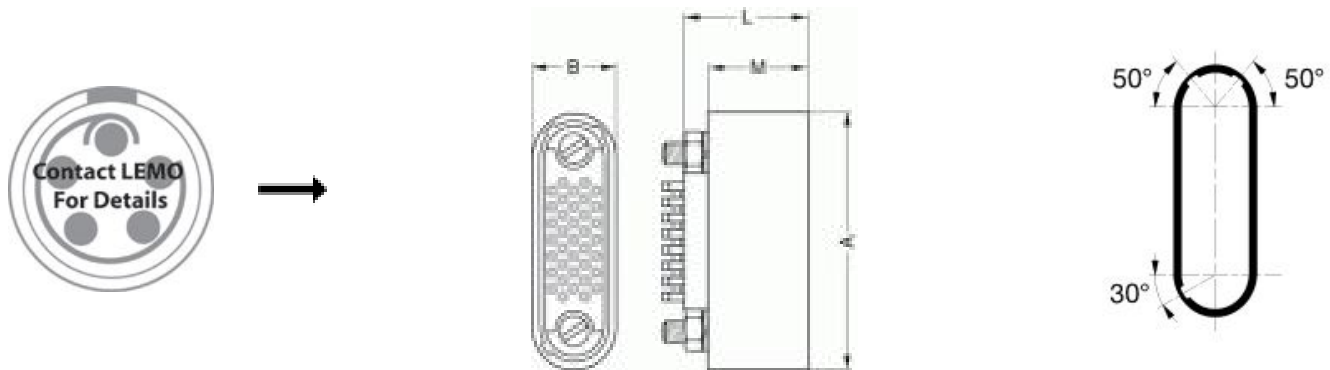

Dimensions

	A	B	C	E	G	L
mm.	24.5	10.5	34.5	3.2	2.2	31.5
in.	0,96	0,41	1,36	0,13	0,09	1,24

RECOMMENDED BY LEMO

Tools

- Crimp Tool: [DPC.91.701.V](#)
Crimp settings: AWG/Selector = 22-24-26/6-5-5
Positionner: [DCE.91.070.BVM](#)
Extractor: [DCF.91.070.2LT](#)
Replacement contact: EGG.0B.655.ZZM

Cables

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.