


**D-SUBMINIATURE CONNECTORS:**  
**K61X Series**  
 High Density Right Angle PCB Mount Compact Footprint

**Product Features**  
 15 Pin High Density D-Subminiature Receptacle, Right Angle PCB Termination, Compact Footprint  
 Available in Reflow Compatible, High Temperature Plastic

**VESA Features**  
 Contact #9 Recessed 0.050" (1.27mm) to Allow Last Mate/First Break on 5V Supply Voltage  
 Blue PBT Insulator Signifies 5V Capability and Full Feature AccessBus Capability in Accordance with Video Electronics Standard Association (VESA)  
 Meets Display Data Channel (DDC) Standard

**K61X Series Dimensions**  
 Dimensions in mm

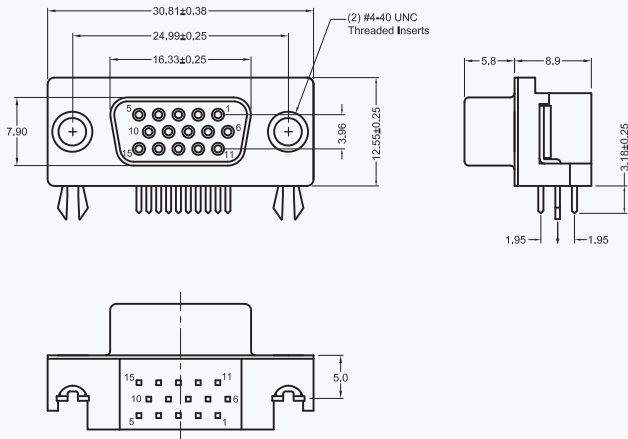

2D Drawing	IGES	STEP	3D PDF
Solder Profile	CofC RoHS Compliant	CofC REACH Compliant	UL Plastic File
Certificate of Origin	Check Stock	Request a Sample	Send Us An Email

Generated Part Number



Part Number Builder

<input type="text"/>	-	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
Series		Shell Size Contact	Contact Type	Mounting Option	Plating Option	VESA Option

**Series**  
**K61X** - High Density D-Subminiature Connector, Right Angle PCB Termination

**Contact Shell Option**  
**E** - 15 Contacts

**Contact Type**  
**S** - Socket Contact (Receptacle)

**Mounting Option**  
**N** - With Boardlocks and #4-40 UNC Threaded Inserts  
**NJ** - With Boardlocks and #4-40 Jackscrews Installed

**Plating Option**  
**Blank** - Gold Flash  
**30** - 30µ" Gold

**VESA Option**  
**Blank** - Standard  
**VESA** - VESA Compliant Version

Contact Kycon for Other Options