

## Passive module - VIP-PT/FLK16/DS/FU/LED/AN/DV - 2903599

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)

VARIOFACE interface module for 8 channels




### Your advantages

- ✓ These system-specific interface modules for DeltaV modules are used in combination with the relevant system cables
- ✓ Knife disconnect for each channel
- ✓ Pluggable fuse for each channel



### Key Commercial Data

Packing unit	1 pc
GTIN	 4 046356 948135
GTIN	4046356948135

### Technical data

#### Dimensions

Width	57.1 mm
Height	109.8 mm
Depth	63 mm

#### Ambient conditions

Ambient temperature (operation)	-20 °C ... 60 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C

#### General

Nominal voltage $U_N$	24 V DC
Max. perm. current (per branch)	63 mA (in as supplied state, with one 63 mA fuse)
Number of positions	16
Mounting position	any

#### Connection data

## Passive module - VIP-PT/FLK16/DS/FU/LED/AN/DV - 2903599

### Technical data

#### Connection data

Connection name	Field level
Connection method	Push-in connection
Stripping length	8 mm
Conductor cross section solid	0.14 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
Conductor cross section flexible	0.14 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
Conductor cross section AWG	26 ... 14

#### Connection data 2

Connection name	Controller level
Connection method	IDC/FLK pin strip
Number of connections	1
Number of positions	16
Pitch	2.54 mm

#### Supported controller

Controller	Emerson DeltaV
- suitable I/O card	VE4003S2B4
	VE4005S2B3
	VE4003S3B5
	SE4003S2B4

#### Standards and Regulations

Connection in acc. with standard	CSA
Standards/regulations	DIN EN 50178


#### Environmental Product Compliance

	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"

### Drawings

# Passive module - VIP-PT/FLK16/DS/FU/LED/AN/DV - 2903599

Circuit diagram

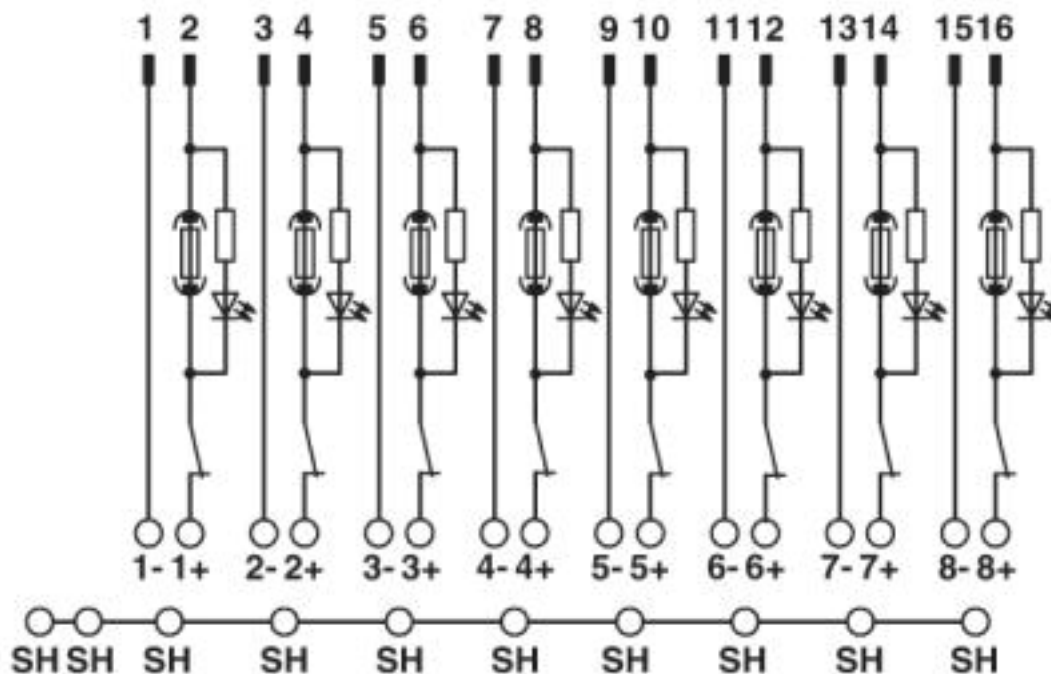

Connection scheme VIP-PT/FLK16/DS/FU/LED/AN/DV

## Approvals

Approvals

Approvals

CSA / UL Recognized / cUL Recognized / EAC / cULus Recognized

Ex Approvals

## Approval details

CSA		<a href="http://www.csagroup.org/services-industries/product-listing/">http://www.csagroup.org/services-industries/product-listing/</a>	2122203
Nominal voltage UN	24 V		
Nominal current IN	0.063 A		
mm <sup>2</sup> /AWG/kcmil	26-14		

# Passive module - VIP-PT/FLK16/DS/FU/LED/AN/DV - 2903599

## Approvals

UL Recognized		<a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a>	FILE E 238705
Nominal voltage UN	24 V		
Nominal current IN	0.063 A		
mm <sup>2</sup> /AWG/kcmil	26-14		

cUL Recognized		<a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a>	FILE E 238705
Nominal voltage UN	24 V		
Nominal current IN	0.063 A		
mm <sup>2</sup> /AWG/kcmil	26-14		

EAC		RU C- DE.A*30.B.01742
-----	--	--------------------------

cULus Recognized	
------------------	--

Phoenix Contact 2019 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>