

ITEM	PART#	DESCRIPTION	QTY	UOM
A	334710206	MX150 ASSY 1.5 RCPT 1X2 CPA BLK A/2	1	PC
C	330123001	MX150 RCPT 0.3 TIN 14/16AWG D WIND SLD	2	PC
D	884260070	PAPER PRINTED PAPER WHITE (S100X150YAJ)	1	PC

FROM	TO	CABLE PART#	DESCRIPTION	COLOR
A1	--	100027101	14AWG DISC PVC BK OD 2.4 TXL BALAJI	BLACK
A2	--	100027101	14AWG DISC PVC BK OD 2.4 TXL BALAJI	BLACK

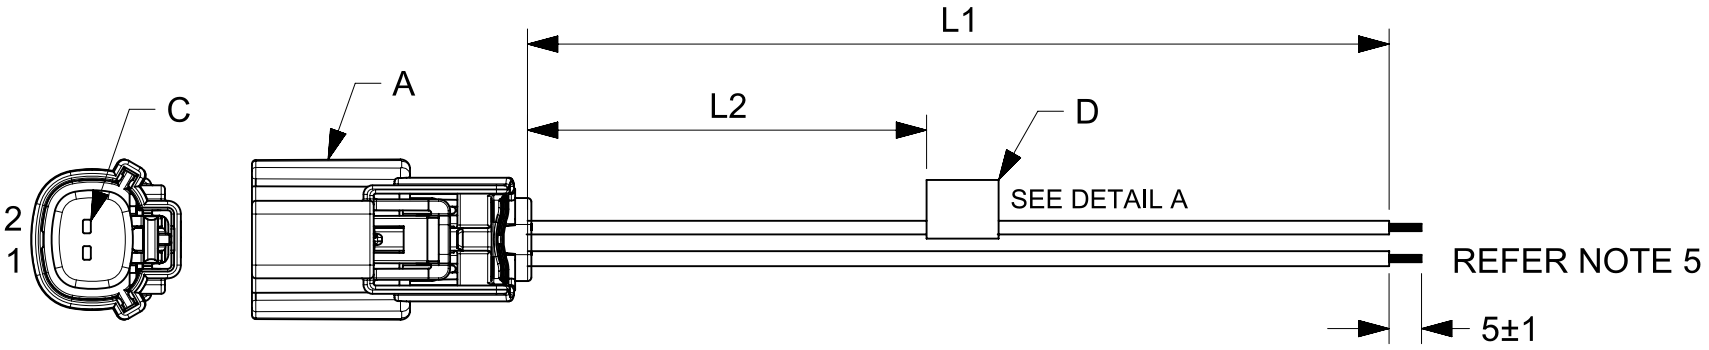


TABLE			
PART NUMBER	L1	L2	TITLE
2162811021	150±8	63 REF	MX150 R-S SR 2ckt 150mm Sn sealed cable
2162811022	300±10	138 REF	MX150 R-S SR 2ckt 300mm Sn sealed cable
2162811023	600±10	288 REF	MX150 R-S SR 2ckt 600mm Sn sealed cable

**NOTES**

- Sealing should pass the IP67 rating as defined by product spec.
- Connector view shown is from mating side.
- Label text must be 2mm max. in height with Arial font.
- Label must be wrapped in flag type on a single cable.
- The free ends to be stripped twisted and tinned to the length of 5±1. the tinning dia must be ....mm max

MOLEX P/N  
MOLEX  
BATCH WK/YR  
DETAIL A

FUNCTIONAL SYMBOLS $\frac{F}{A} = 0$ $\frac{F}{E} = 0$ $\frac{F}{P} = 0$ DIVISIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		CURRENT REV DESC:				
	DIMENSION UNITS	SCALE	GENERAL TOLERANCES (UNLESS SPECIFIED)			EC NO: 643544 DRWN: NNANKOLA 2020/06/30 CHK'D: SD 2020/08/31 APPR: SD 2020/08/31	
	mm	NTS	ANGULAR TOL ± °				
	4 PLACES ±	3 PLACES ±	INITIAL REVISION:			DOCUMENT NUMBER <b>2162811021</b>	
3 PLACES ±	2 PLACES ±	DRWN: NNANKOLA 2020/06/30		DOC TYPE PSD			
2 PLACES ±	1 PLACE ±	APPR: SD 2020/08/31		DOC PART 000			
1 PLACE ±	0 PLACES ±	APPR: SD 2020/08/31		REVISION A			
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION	DRAWING	SERIES	MATERIAL NUMBER	CUSTOMER	SHEET NUMBER
			A4-SIZE	216281	SEE TABLE	GENERAL MARKET	1 OF 1