



(1)

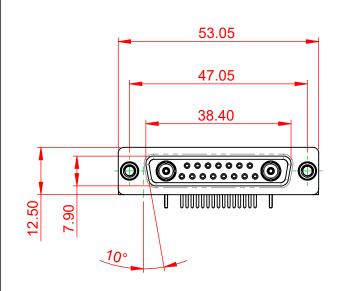



## NOTES:


MATERIAL:<br/>HOUSING:<br/>SHELL:<br/>CONTACT:THERMOPLASTIC POLYESTER, UL94V-0<br/>STEEL, NICKEL PLATED<br/>COPPER ALLOY, GOLD FLASH PLATEDOPERATING TEMPERATURE:-55°C ~ 125°CPOWER/CO-AX CONTACT RATING:<br/>SIGNAL CONTACT CURRENT RATING:<br/>SIGNAL CONTACT RESISTANCE:50Ω (IMPEDANCE)<br/>5A PER CONTACT<br/>10mΩ MAX.

INSULATOR RESISTANCE: DIELECTRIC WITHSTANDING VOLTAGE:


.XX ±0.13

.XXX ±0.05





			SW REFERENCE NO.: 630 COMBO ASSEMBLY		
COMBINATION D-SUB		DRAWN: C.B	DATE: JAN. 01/20	19	
		CHECKED:	DATE:		
EDAC INC TORONTO, ONTARIO CANADA YOUR CONNECTION TO QUALITY & SERVICE	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2	
		DRAWING NUMBER: 630-17W2240-5N6		ISSUE	
		PART NUMBER: 630-17W2	2240-5N6	1	





THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

