
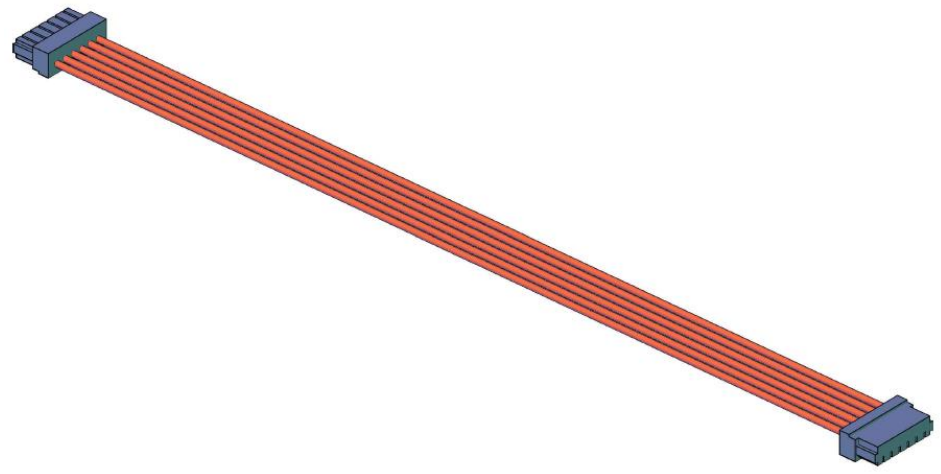


THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J.S.T. AND SHALL NOT BE USED OR SHOWN WITHOUT WRITTEN PERMISSION.

4			3		2		1				
ITEM	CONNECTOR PART NO.	DESCRIPTION	IPI CHECK	EOR CHECK	Applicable Tooling						
1	See Table 1	XSR CONNECTOR			BCD						
2	UL11136, 36 AWG	RED			TABLE 1						

ITEM	NUMBER OF CIRCUITS	CONNECTOR PART NO.	ASSEMBLY PART NUMBER	TOTAL WIRE REQUIRED
1	2	02XSR-36S	A02XSR02XSR36R51A	101.6 mm
1	4	04XSR-36S	A04XSR04XSR36R51A	203.2 mm
1	6	06XSR-36S	A06XSR06XSR36R51A	304.8 mm
1	10	10XSR-36S	A10XSR10XSR36R51A	508 mm
1	16	16XSR-36S	A16XSR16XSR36R51A	812.8 mm
1	20	20XSR-36S	A20XSR20XSR36R51A	1,016 mm
1	22	22XSR-36S	A22XSR22XSR36R51A	1,117.6 mm

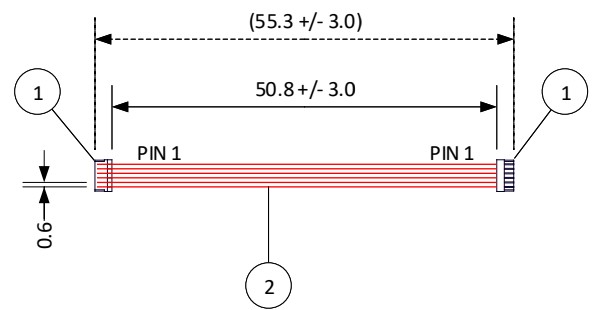

Electrical Specifications
Current: 0.2A AC/DC
Voltage: 30V AC/DC



SCALE	1:1	
DIMENSIONS All dimensions are in MM with a tolerance of +/- 3.0 unless otherwise specified.	CUSTOMER NAME	CUSTOMER PART NO.
	DESCRIPTION 0.6 mm Pitch XSR Standard Catalog Assembly - 2" Overall Length - Pin out: 1 to 1	
DRAWN BY	STEVEN PILKINGTON	
CHECKED BY	JUSTIN BAKER	
ASSEMBLY PART NO.	SEE TABLE 1	
DRAWING NO. & REVISION	GAM-001	REVISED
		2/24/2016

REV.	DESCRIPTION	DATE	BY
1	Add electrical specifications	6/27/2018	SP

4    3    2    1