

Molded Inductors, Axial Leads, High Frequency and Noise Suppression Applications




FEATURES

- Accurate dimensions
- Superior moisture protection
- Material categorization: for definitions of compliance please see www.vishay.com/doc?99912


RoHS
COMPLIANT

The inductors have copper winding on magnetic core structure.

DIMENSIONS in millimeters (± 0.5)

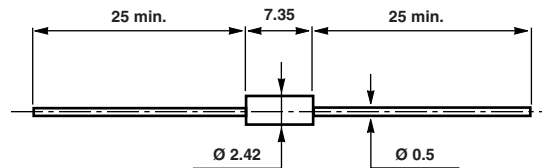

STANDARD ELECTRICAL SPECIFICATIONS

MODEL	INDUCTANCE RANGE μH	RATED POWER $P_{70^\circ\text{C}}$ W	LIMITING ELEMENT VOLTAGE V_{RMS}	TOLERANCE ⁽¹⁾ $\pm \%$	Q RANGE	I RANGE mA
TR021	0.022 to 1500	0.180	500	10	15 to 40	45 to 2530

Note

⁽¹⁾ $\pm 10 \%$ for $0.022 \mu\text{H} < L \leq 1500 \mu\text{H}$. On request: $\pm 5 \%$ and $\pm 2 \%$ for $1 \mu\text{H} < L \leq 1000 \mu\text{H}$

MECHANICAL SPECIFICATIONS

Coating	Molded epoxy
Weight	0.5 g

PACKAGING

Standard: in tape and reel of 1000 pieces, code R15 (R)
On request: 250 pieces tape in box "ammopack", code A15 (B)

ENVIRONMENTAL SPECIFICATIONS

Operating temperature range	0°C to $+70^\circ\text{C}$
Temperature limits	-55°C to $+125^\circ\text{C}$

MARKING

Standard:
print marked-manufacturer, inductance value, tolerance

ORDERING INFORMATION (part number)

T	R	0	2	1	6	R	8	K	R	1	5					
MODEL TR		STYLE 021			VALUE From 0.022 μH to 1500 μH 6R8 = 6.8 μH			TOLERANCE K : $\pm 10 \%$ On request: G : $\pm 2 \%$ J : $\pm 5 \%$		PACKAGING R15 = reel 1000 pieces On request: A15 = ammopack 250 pieces			SPECIAL Special code given by Vishay			

PART NUMBER DESCRIPTION (for information only)

TR	021	6 μH 8	10 %	R		e1
MODEL	STYLE	VALUE	TOLERANCE	PACKAGING	SPECIAL	LEAD (Pb)-FREE



STANDARD VALUES						
INDUCTANCE VALUE μH	TOLERANCE %	Q MIN.	TEST FREQUENCY MHZ	RESISTANCE MAX. Ω	SRF MIN. MHZ	I MAX. mA
0.022	± 10	35	50	0.028	650	2530
0.027	± 10	35	50	0.030	650	2450
0.033	± 10	35	50	0.035	650	2270
0.039	± 10	35	50	0.035	650	2270
0.047	± 10	35	50	0.04	650	2120
0.056	± 10	35	50	0.05	650	1900
0.068	± 10	35	50	0.06	650	1730
0.082	± 10	35	50	0.07	650	1620
0.10	± 10	30	25	0.08	650	1500
0.12	± 10	30	25	0.09	620	1410
0.15	± 10	30	25	0.10	600	1340
0.18	± 10	30	25	0.12	550	1225
0.22	± 10	30	25	0.14	510	1130
0.27	± 10	30	25	0.16	430	1060
0.33	± 10	30	25	0.20	410	945
0.39	± 10	30	25	0.30	380	775
0.47	± 10	30	25	0.38	340	690
0.56	± 10	30	25	0.50	300	600
0.68	± 10	30	25	0.60	275	550
0.82	± 10	30	25	0.75	250	490
1	± 10	30	25	0.90	230	445
1.2	± 10	25	7.9	0.18	150	1000
1.5	± 10	25	7.9	0.22	140	905
1.8	± 10	25	7.9	0.30	125	775
2.2	± 10	25	7.9	0.40	115	670
2.7	± 10	30	7.9	0.50	100	600
3.3	± 10	35	7.9	0.80	90	475
3.9	± 10	35	7.9	1	82	425
4.7	± 10	35	7.9	1.2	75	385
5.6	± 10	35	7.9	1.8	68	330
6.8	± 10	40	7.9	1.8	60	330
8.2	± 10	40	7.9	2.55	55	265
10	± 10	40	7.9	2.9	50	245
12	± 10	35	2.5	1.9	45	305
15	± 10	40	2.5	2.8	45	250
18	± 10	40	2.5	3.1	40	240
22	± 10	40	2.5	3.3	40	230
27	± 10	40	2.5	3.9	30	215
33	± 10	40	2.5	4	24	210
39	± 10	40	2.5	4.4	22	200
47	± 10	40	2.5	5	20	190
56	± 10	40	2.5	5.3	18	180
68	± 10	40	2.5	6.1	15	170
82	± 10	40	2.5	6.9	14	160
100	± 10	40	2.5	7.7	11.5	150
120	± 10	35	0.79	9.9	9.5	135
150	± 10	35	0.79	11	8.5	120
180	± 10	25	0.79	18	8	100
220	± 10	25	0.79	21	7.2	90
270	± 10	25	0.79	25	6.4	85
330	± 10	25	0.79	34	5.6	70
390	± 10	25	0.79	42	4.5	65
470	± 10	25	0.79	46	4.2	60
560	± 10	25	0.79	52	3.5	55
680	± 10	25	0.79	55	3.3	55
820	± 10	25	0.79	62	3	50
1000	± 10	25	0.79	67	2.5	50
1200	± 10	15	0.25	74	1.6	45
1500	± 10	15	0.25	80	1.2	45



Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Hyperlinks included in this datasheet may direct users to third-party websites. These links are provided as a convenience and for informational purposes only. Inclusion of these hyperlinks does not constitute an endorsement or an approval by Vishay of any of the products, services or opinions of the corporation, organization or individual associated with the third-party website. Vishay disclaims any and all liability and bears no responsibility for the accuracy, legality or content of the third-party website or for that of subsequent links.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.