





ISSUE NUMBER	
ORIGINAL	1

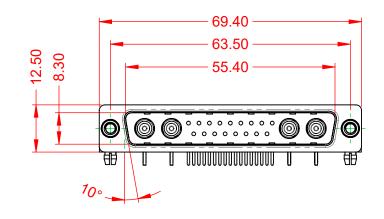




NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, NICKEL PLATED COPPER ALLOY, GOLD FLASH PLATED



POWER/CO-AX CONTACT RATING:	50Ω (IMPE
SIGNAL CONTACT CURRENT RATING: SIGNAL CONTACT RESISTANCE:	5A PER CO 10mΩ MAX
	5000140
INSULATOR RESISTANCE:	5000MΩ mi

.XX ±0.13 .XXX ±0.05

DIELECTRIC WITHSTANDING VOLTAGE:

OPERATING TEMPERATURE:


DANCE)

-55°C ~ 125°C

ONTACT

0MΩ min.

1000V AC rms



COMBINATION D-SUB		SW REFERENCE NO.: 629 COMBO ASSEMBLY			
		DRAWN: C.B	DATE: JAN. 01/20	19	
		CHECKED:	DATE:		
EDAG INC TORONTO, ONTARIO CANADA YOUR CONNECTION TO QUALITY & SERVICE	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2	
		DRAWING NUMBER: 629-21W4	4240-5ND	ISSUE	
		PART NUMBER: 629-21W4	4240-5ND	1	



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

