

	T	D D	н <b>п</b>	m	0
_					



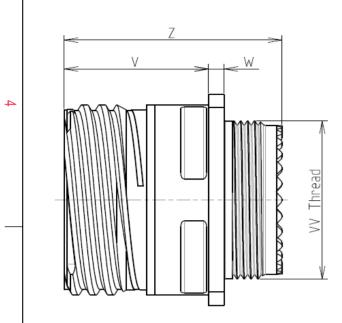

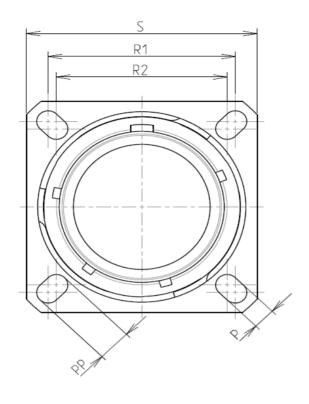

LAYOUT SHOWN AS

Keying Shown as example

## CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 13

SHELL TYPE : Square Flange Receptacle

PLATING : Z = Black Zinc Nickel

Н

CONTACT TYPE : Standard Crimp Contact

ယ

 $\sim$ 

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Aluminium	
-Shell Plating	: Black Zinc Nickel	
-Insulator	: Thermoplastic	
-Contacts	: Copper Alloy	
-Seals & Grommet	: Silicon Elastomer	
-Contact Plating	: Gold over copper Alloy 0.8µm minimum	
-Durability	: 500 Mating cycles	
-Delivered without Souriau contacts		
-Temperature Range	: -65°C to +175°C	
-Salt Spray	: 500 hours	

8D 0

G

13

Ζ

03

S

F

N L

Dim	Nominal
Р	3.25±0.2
PP	4.93±0.2
R1	23.01
R2	20.62
S	28.6±0.3
V	20.83+0/-1.25
W	2.1/2.5
Z	31.5 Max
VV THREAD	M18x1-6g


Delivered W/O Contacts


CONTACT LAYOUT : 13-03

CONTACT TYPE : SOCKET(500 Matings)

Е

**ORIENTATION : N** 



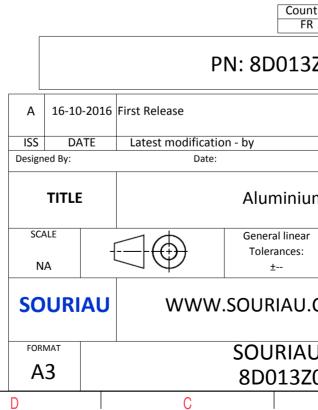

	ω		A			
AS EX4	AMPLE				3	
any non-conformity or damage which does not comply with of the Parties or by a third party adation, technical notice.)						
untry FR	Jurisd	liction & Con Not Listed			2	
3Z03SNL						
				MOD N°		
		CUSTOME	R DRAWING			
um Receptacle 8D series						
ar :	NPRDS / PROJECT 859					
This document is the property of SOURIAU						
it must not be reproduced communicated without perm						
	DRG N°			SHEET		
Z03	SNL-C			1/2	J	
	В		А			

$ \begin{array}{c} c \\ 0 \\ \hline \\ \hline \\ 0 \\ \hline \hline \\ 0 \\ \hline \\ 0 \\ \hline \hline \hline \hline$		<u>_</u>	۵	гт —	m	D	0		
3+16         10     <									
Image: Source of the product of the	4					Σ.	R1		
Co     BA BA BI BT       SOURIAU shall not be liable for at due to a use of the Products the Specifications issued by either of (professional recommendation) RN       No       Image: Control of the Specification State of the Products (professional recommendation) RN       A     16-10-2016 First Release ISS       Image: Control of the Specification - by Designed Ry       Image: Control of the Specification - by Designe		AB	X         Y           2.39         1.47           0         -2.79			4		<u>.</u>	
No No No No No No No No No No	ယ						Ø Ø/ R	бА АА R1	
No No No No No No No No No No		-							
A       16-10-2016       First Release         ISS       DATE       Latest modification - by         Designed By:       Date:         TITLE       Aluminiur         SCALE       General linear         NA       Tolerances:         ±       SOURIAU         SOURIAU       WWW.SOURIAU.O         FORMAT       SOURIAU         A3       SOURIAU							due to a use of the Products w the Specifications issued by either o		
A 16-10-2016 First Release ISS DATE Latest modification - by Designed By: Date: TITLE Aluminium SCALE General linear Tolerances: 1 SOURIAU WWW.SOURIAU.CO FORMAT SOURIAU.CO FORMAT SOURIAU.CO F	N						Count FR		
ISS       DATE       Latest modification - by         Designed By:       Date:         TITLE       Aluminium         SCALE       Image: SCALE         NA       Image: Scale         SOURIAU       WWW.SOURIAU.C         FORMAT       SOURIAU         A3       SOURIAU							PN:	8D0132	
Designed By:     Date:       TITLE     Aluminiur       SCALE     General linear       NA     Tolerances:       ±     SOURIAU       FORMAT     SOURIAU       A3     SOURIAU									
SCALE NA SOURIAU SOURIAU FORMAT A3 SOURIAU A3 SOURIAU A3 SOURIAU A3 SOURIAU								У	
NA Tolerances: ± SOURIAU WWW.SOURIAU.C						TITLE	A	Aluminiur	
FORMAT SOURIAL A3 8D013Z0	<b>→</b>							Tolerances:	
A3 8D013Z0						SOURIA	WWW.SO	URIAU.(	
	l	Н	G	F	E	1			

