
т р С	n m		0		>
Z D D D D D D D D D D D D D D D D D D D					
	eying Shown as example		LAYOUT SHOWN AS EXA	AMPLE	
CHARACTERISTICS	Connector dimension				
 -Standard : Based on MIL-DTL-38999 Series III -Shell Material : Aluminium -Shell Plating : Black Zinc Nickel -Insulator : Thermoplastic -Contacts : Copper Alloy -Seals & Grommet : Silicon Elastomer -Contact Plating : Gold over copper Alloy 0.8µm minimum 	DimNominalØS41.7 MaxZ31 MaxVV THREADM31x1-6g		SOURIAU shall not be liable for any r due to a use of the Products whic the Specifications issued by either of tl (professional recommendatio Country FR	h does not comply with he Parties or by a third party n, technical notice.)	
-Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories			PN: 8D521Z42SC		
-Temperature Range : -65°C to +175°C -Salt Spray : 500 hours		A 12-10-2010	5 First Release		
_		ISS DATE Designed By:	Latest modification - by Date:	CUSTOMER DRAWIN	MOD N°
		TITLE	TITLE Aluminium Plug 8D series		
BASIC SERIES: 8D 5 - 21 Z 42 SHELL TYPE : Plug with RFI Shielding - - 21 Z 42	s C	SCALE	General linear Tolerances:	NPRDS / PROJECT 859	
CONTACT TYPE : Standard Crimp Contact SHELL SIZE : 21	ORIENTATIO CONTACT TYPE : SOCKET(500 Mat	- SOURIAU	C SOURIAU This document is the property of SOURIAU. WWW.SOURIAU.COM it must not be reproduced or		J roduced or
PLATING : Z = Black Zinc Nickel	CONTACT LAYOUT : 2		SOURIAU [DRG N°	SHEET 1/2
			8D521Z42		

_	Ŧ	۵	רד	m		0
4		Contact Layout 42				
	Ctc A B	2#4 Power 21-42 X Y 0 6.19 0 -6.19				
ω						
	_					SOURIAU shall not be liable for an due to a use of the Products wi the Specifications issued by either o (professional recommenda
N						Count FR PN: 8D521
_					ISS DATE Designed By:	Date:
_					SCALE NA	Alumir General linear Tolerances: ±
					FORMAT A3	U WWW.SOURIAU.C SOURIAU 8D521Z
L	Н	G	F	E	D	C

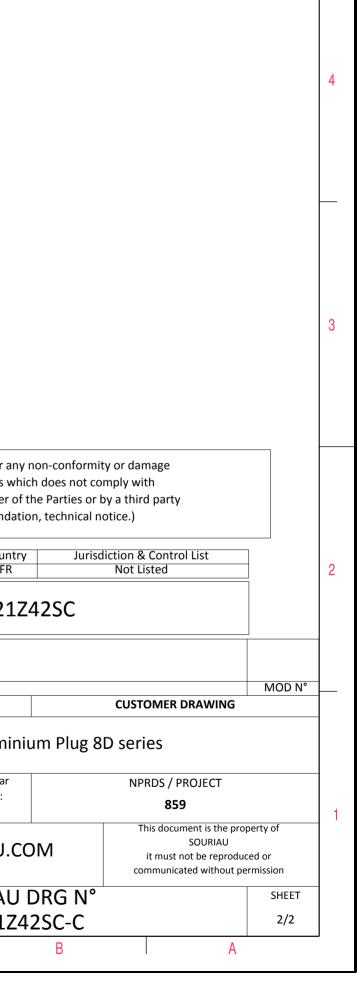

 \triangleright

σ