

Mini / EvoSIGNAL

Mini TwinLIGHT Combi 24VAC/DC CL

| | |
|-----------|------------|
| Part No.: | 460.410.75 |
| Series: | EvoSIGNAL |

**MECHANICAL DATA**

| | |
|------------------------------|-----------------------------|
| Height | 85 mm |
| Diameter | 62 mm |
| Materials | PC PC/ABS |
| Dome colour | Clear |
| Housing colour | Grey |
| Protection category | IP66 |
| Connection | Push-in terminal |
| cross-sectional area minimum | 0,25mm ² / 24AWG |
| cross-sectional area maximum | 1,50mm ² / 16AWG |
| Type of fixing | Adapter required |
| Working temperature minimum | -30°C |
| Working temperature maximum | +60°C |
| Weight with packaging | 100 g |
| Product weight | 78 g |

ELECTRICAL DATA

| | |
|-----------------------------|--------------------|
| Operating voltage | 24V |
| Operating voltage type | AC/DC |
| Operating voltage frequency | 50Hz |
| Operating voltage tolerance | +/- 10% |
| Rated operational voltage | 24 VDC |
| Rated operational current | 98 mA |
| Rated inrush current | 3000 mA |
| Protection class | Protection class 2 |
| Pollution degree | 3 |
| Overtoltage category | I |

OPTICAL DATA

| | |
|------------------------------|---------------------------------|
| Light source | LED |
| Light colour | White |
| Optical signal image | Blink Permanent TwinLight |
| Blink frequency | 1 Hz |
| Service life optical | 50,000 h minimum |
| Pulse- & pause Duration [ms] | 471ON, 489OFF |

ACOUSTIC DATA

| | |
|-----------------------------|-------------|
| Volume (max) at 1m distance | 95,0 dB (A) |
|-----------------------------|-------------|



For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

Mini / EvoSIGNAL

Mini TwinLIGHT Combi 24VAC/DC CL

| | |
|-----------------------|-------------------------------|
| Acoustic signal image | Continuous tone Pulse tone |
| Number of tones | 2 tone |
| Audio frequency | 4000 Hz |
| Acoustic service life | 5,000 h minimum |

| APPROVAL DATA | |
|-------------------------------|-----------------------|
| Conforms with CE | Yes |
| WEEE | Yes |
| Conforms with ATEX-directive | No |
| Conforms with CCC | No |
| Conforms with UL | cULus |
| UL Type Rating | Type 12 |
| Conforms with FCC | No |
| Conforms with IC | No |
| EAC certificate available | Yes |
| Conforms with UKCA (Importer) | Yes (WERMA (UK) Ltd.) |
| Conforms with AS-I | No |
| ICAO Certification | No |
| Conforms with DNV | No |
| Conforms with RoHS CN | No |
| Conforms with VdS | No |
| MTTF-value [years] | 502 |




For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

Mini / EvoSIGNAL

Mini TwinLIGHT Combi 24VAC/DC CL

DRAWING

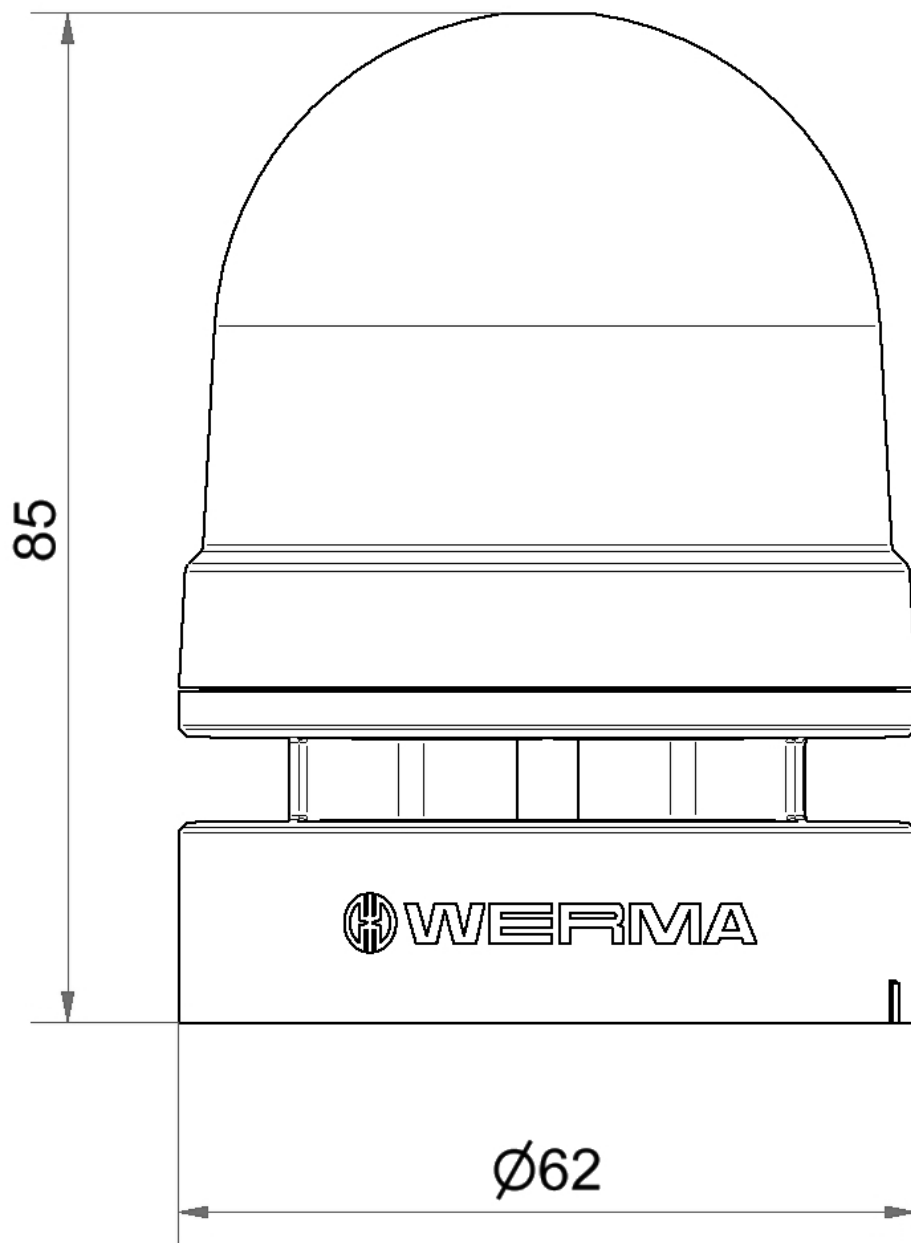

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.