




**INSULATION DISPLACEMENT CABLE**  
**.050" PITCH, 26 AWG, 7/34 STRANDED EXTRUDED FEP**

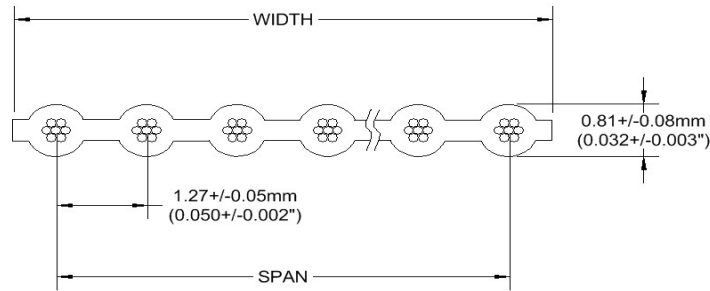

Cond. No.	Part Number	Span	Width
2	1000570382	0.050 ± .002	0.100 ± .005
3	1000570384	0.100 ± .005	0.150 ± .007
4	1000570113	0.150 ± .005	0.200 ± .007
4	1000570114	0.150 ± .005	0.200 ± .007
5	1000570116	0.200 ± .005	0.250 ± .007
6	1000570120	0.250 ± .005	0.300 ± .007
6	1000570444	0.250 ± .005	0.300 ± .007
8	1000570122	0.350 ± .005	0.400 ± .007
8	1000570123	0.350 ± .005	0.400 ± .007
9	1000570457	0.400 ± .007	0.450 ± .007
10	1000570094	0.450 ± .007	0.500 ± .007
10	1000570095	0.450 ± .007	0.500 ± .007
12	1000570096	0.550 ± .007	0.600 ± .007
14	1000570097	0.650 ± .007	0.700 ± .007
15	1000570439	0.700 ± .007	0.750 ± .007
16	1000570098	0.750 ± .007	0.800 ± .007
16	1000570099	0.750 ± .007	0.800 ± .007
20	1000570101	0.950 ± .010	1.000 ± .010
20	1000570102	0.950 ± .010	1.000 ± .010
24	1000570105	1.150 ± .010	1.200 ± .010
24	1000570519	1.150 ± .010	1.200 ± .010
25	1000570106	1.200 ± .010	1.250 ± .010
26	1000570107	1.250 ± .010	1.300 ± .010
26	1000570108	1.250 ± .010	1.300 ± .010
30	1000570110	1.450 ± .010	1.500 ± .010
34	1000570111	1.650 ± .010	1.700 ± .010
37	1000570441	1.800 ± .010	1.850 ± .010
40	1000570112	1.950 ± .010	2.000 ± .010
50	1000570115	2.450 ± .010	2.500 ± .010
60	1000570118	2.950 ± .015	3.000 ± .015
64	1000570121	3.150 ± .015	3.200 ± .015

CHARACTERISTICS	
Conductor	26 AWG, 7/34 Stranded, Silver Plated Copper
Insulation	FEP
Color	Green, (Optional: Rainbow, 0.035+/-0.003")
Impedance (ohms)	100 Unbalanced
Capacitance (pF/ft)	12.0 Unbalanced
Inductance (uH/ft)	0.12 Unbalanced
Insulation Resistance (Mohm)	>500
Voltage Rating	300V
Temperature Rating	-55°C to 200°C

**PACKAGING**  
 100 ft./Spool, 10 Ft. minimum length

**UL Style 20424**