

THIS IS A C.A.D. GENERATED DRAWING TOLERANCE UNLESS OTHERWISE SPECIFIED DO NOT MAKE MANUAL REVISIONS TO MASTER.


$\land \Box$	l
XID	l
	ł
	l
	l

**ISSUE NUMBER** 



ORIGINAL

(1)

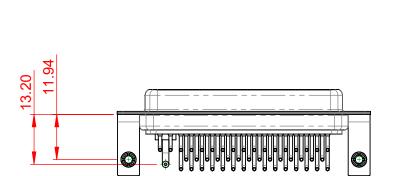

## NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, TIN PLATED COPPER ALLOY, 30µ GOLD PLATED

**OPERATING TEMPERATURE:** -55°C ~ 125°C

.X ±0.25 .XX ±0.13

.XXX ±0.05

10.70

5.80


11.94

2.54

POWER/CO-AX CONTACT RATING: 10A (CURRENT) (IF PRESENT)

SIGNAL CONTACT CURRENT RATING: 5A PER CONTACT SIGNAL CONTACT RESISTANCE:  $10m\Omega$  MAX.

**INSULATOR RESISTANCE:** DIELECTRIC WITHSTANDING VOLTAGE: 5000MΩ min. 1000V AC rms



	COMBINATION D-SUB		SW REFERENCE NO.: 630 COMBO ASSEMBLY			
			COMBINATION D-SUB DRAWN: C.B		DATE: JAN. 01/2019	
			CHECKED:	DATE:		
	EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INCAND	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2	
	EDAC INC TORONTO, ONTARIO CANADA YOUR CONNECTION TO QUALITY & SERVICE	SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWING NUMBER: 630-47W1640-1T3		ISSUE	
			PART NUMBER: 630-47W	1640-1T3	1	



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

