


PIN ASSIGNMENT	
P1	P2
1	1
2	2
3	3
4	4
SHEEL	SHEEL

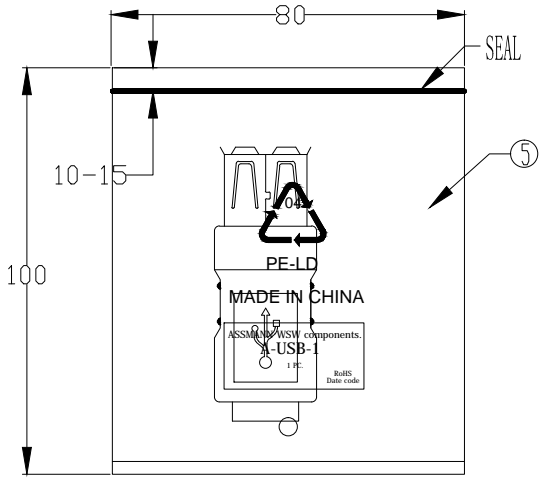

- ① Electronic Test:
- 1.100% Test,(Open,Short,Miss Wire)
  - 2.Contact Resistance:3 ohm max.
  - 3.Insulation Resistance:20M ohm min.
  - 4.Hi-Pot:300V DC/10ms
  - 5.Voltage Rating: 30V
- ① Current Rating: 1.5A
- ① Mechanical:
- 1.Mating force: 3.57Kgf max
  - 2.Unmating force: 1.02Kgf min
  - 3.Operating temperature: -5°C~60°C

Packaging: PE bag

⑥	PE BAG	1/10	CLEAR SIZE:170*250*0.05mm PRINT BLACK"MADE IN CHINA" +"10PCS".
⑤	PE BAG	1	CLEAR SIZE:80*100*0.05mm PRINT BLACK"MADE IN CHINA"+"1PC".
④	OUT JACKET	6g	BEIGE(IV-29) 40P PVC
	IN JACKET	4g	CLEAR LDPE
③	CABLE	5	UL1007 28AWG wire, L=30MM
②	CONN	1	USB A FEMALE,SHELL NICKEL PLATING MATERIAL STEEL, PIN GOLD FLASH PLATING MATERIAL BRASS SHORT BODY
①	CONN	1	USB B FEMALE,SHELL NICKEL PLATING MATERIAL STEEL, PIN GOLD FLASH PLATING MATERIAL BRASS SHORT BODY
NO.	NAME	Q'TY	SPECIFICATION

1PC/PE BAG

**RoHS compliant**  
Unit: mm

Scale	Free				Date	Name	Customer-No.
TOLERANCE					Drawn	20.02.2017	Amy
					Approved	28.11.2019	Carson
DIM	TOL	①	Update	28.11.2019	Carson	ASSMANN WSW-No. A-USB-1	
		②	Drawn	20.02.2017	Amy	Drawing-No. ASS 7875 CA rev01	
Angle	TOL	Id.	Modification	Date	Name	Replace	Sheet

