

6

5




4

3


2

1

PART NUMBER	ENGINEERING NO.	LENGTH ± TOLERANCE
1300500150	ENP2335M010	3' 3" +2.19"/-0" [ 1M +55.6/-0 mm ]

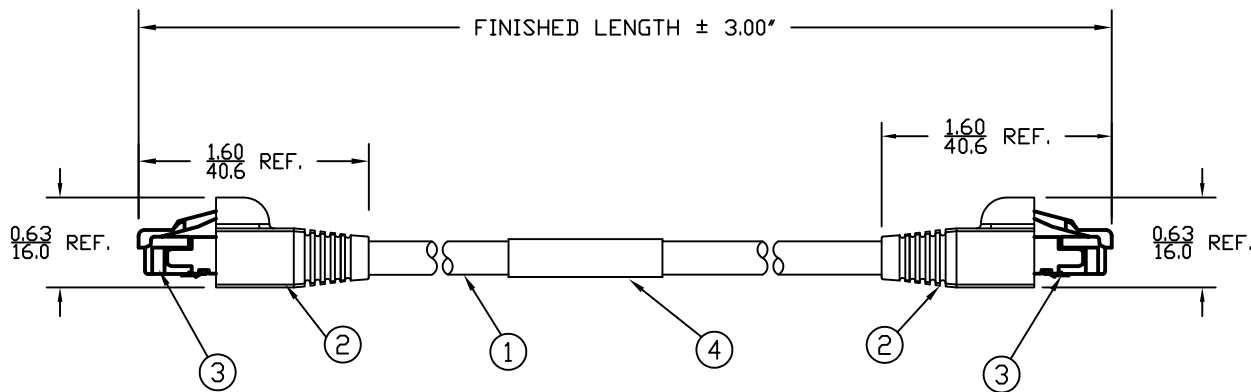

MALE - FACE VIEW



MALE - FACE VIEW

NOTES:

- 1) MATERIAL: SEE TABLE
- 2) FINISHES: SEE TABLE
- 3) CABLE: #26/8 SHIELDED TWISTED PAIR, PUR
- 4) ELECTRICAL DATA:  
ACCORDING TO CAT5e ETHERNET STANDARD  
MAX. VOLTAGE: 30V  
MAX. CURRENT 1.5A
- 5) ENVIRONMENTAL:  
PROTECTION IP67  
TEMPERATURE RANGE: -20°C TO +80°C
- 6) WRAP LABEL IS MARKED WITH P/N & DATE CODE.
- 7) ASSEMBLY IS RoHS COMPLIANT.

WIRE LIST	
PIN	COLOR
1	WHITE/GREEN
2	GREEN
3	WHITE/ORANGE
4	BLUE
5	WHITE/BLUE
6	ORANGE
7	WHITE/BROWN
8	BROWN
GND	DRAIN WIRE

ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH
4	1	LABEL	PLASTIC FILM	BLACK/YELLOW
3	2	RJ45 PLUG	POLYCARBONATE	CLEAR
2	2	BOOT	PVC	BLACK
1	1	ETHERNET CABLE-CAT5E	PUR JACKET	BLACK

SD RELEASE EC NO: WNA2010-0432 DRWN: TVICKERS 2010/01/14 CHKD: BWOODMA APPR: DTTITUS 2010/01/15	QUALITY SYMBOLS ▽=0 ▽C=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION	
				IN/MM	1:1	INCH		ETHERNET MMJ RJ45/RJ45 568-A SHIELD ASSEMBLY PROPLEX STRANDED CABLE
				mm	INCH			
				4 PLACES ±---	±---	DRAWN BY		DATE
		3 PLACES ±---	±0.05	CHECKED BY	DATE			
		2 PLACES ±0.13	±0.10	BWOODMAN 2010/01/13				
		1 PLACE ±0.25	±0.20	APPROVED BY		DATE		
		ANGULAR ±1/2°		DTITUS 2010/01/15				
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		MATERIAL NO.		DOCUMENT NO.		
				SEE CHART		SD-130050-016		SHEET NO.
				SIZE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
				A	1 OF 1			

6

5

4

3

2

1