REV.	ECN NO.	DESCRIPTION	SIGN	DATE
C1	N/A	INITIAL DRAWING	Liu	2020/05/17



Recommended Panel Cut-Out



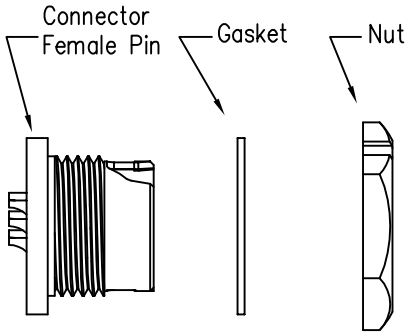

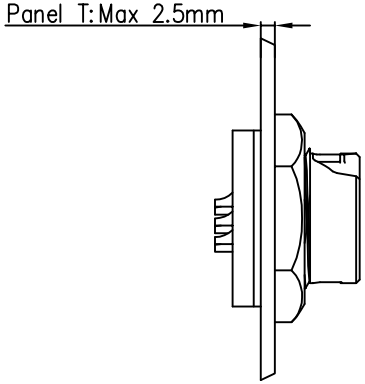



23XXX635-01

Pin Number



7 Pin

P/N: 23007635-01



8 Pin

P/N: 23008635-01



9 Pin

P/N: 23009635-01

Pin Assignments Front View



Specification:
1.Operation Temperature: -45°C~105°C.
2.Insulation Resistance: 100MΩ at DC500V.
3.Contact Resistance: <10mΩ.
4.Withstand Voltage: 1300V AC
5.Operating Current: 5A
6.Operating Voltage: DC 60V
7.Waterproof Rate: IP67 (Mated)
8.Housing: Nylon, Black
9.Female Pin: Copper Alloy, Gold Plated
10.Gasket: Silicon Gray
11.Panel Nut: Nylon, Blue
12.Torque Rate: 0.8~1.0N • m
13.RoHS Compliant.
14.UL Compliant.(Only 7Pin & 8Pin)
15.Mating Cap P/N: 806-00047-00

UNIT: mm	DESCRIPTION: Middle Series Push Lock Front Mount With Female Pin	CHOGORI	PART NO: 23XXX635-01	DRAWN BY: Liu	DATE: 2020/05/17
TOLERANCE: .X ±0.25, .XX ±0.15, .XXX ±0.05, ANGLES ±1°	SCALE: 1:1 SHEET: 1 OF 1		DWG NO	CHECKED BY: Mo	DATE: 2020/05/17
	REV: C1 SIZE: A4 * : Inspection Item		CUSTOMER	APPROVED BY: Adley	DATE: 2020/05/17

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN CHOGORI PERSONNEL WITHOUT AUTHORIZATION FROM CHOGORI CORP.