


REV.	DATE	DESCRIPTION
01	Nov. 21, '17	1st RELEASE

NOTES:

1. UNSPECIFIED TOLERANCE: .XXX ±0.05
 .XX ±0.10
 .X ±0.25

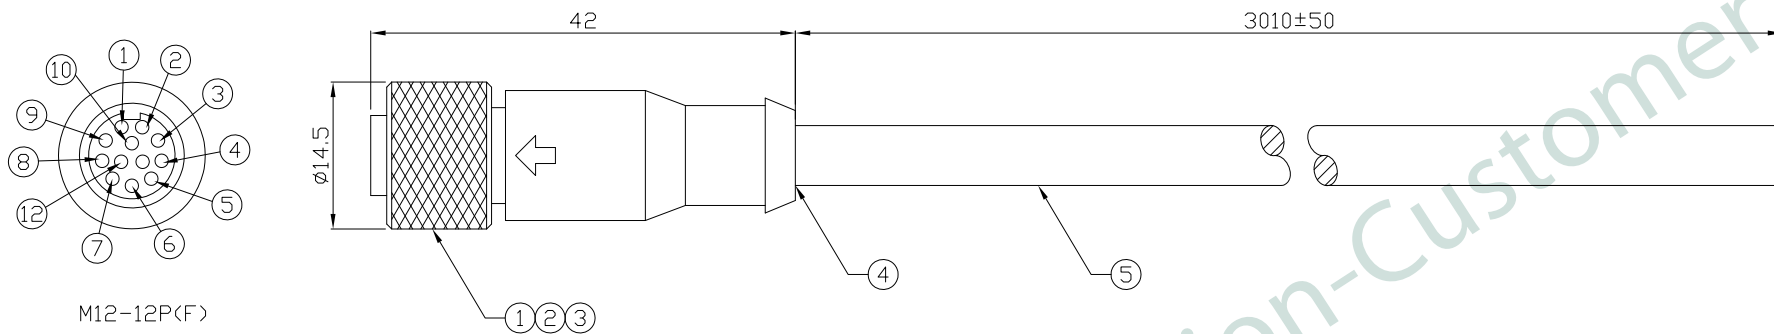

PIN ASSIGNMENT

- 1 ——— BLUE
- 2 ——— YELLOW
- 3 ——— BROWN
- 4 ——— RED
- 5 ——— BLACK
- 6 ORANGE
- 7 WHITE
- 8 GREEN
- 9 WHITE
- 10 ——— GRAY
- 11 ——— WHITE
- 12 ——— PURPLE
- SHELL ——— DRAIN

KWPA-2FM-C301-001

SERIAL NO. 2: M12
 LEFT CONNECTOR F: FEMALE
 SEPC CODE M: MOLDING CABLE(180°)
 SERIAL NUMBER
 CABLE LENGTH 301: 301cm
 SPEC C: 12 PIN

NO	NAME	DESCRIPTION	COLOR	Q'TY
5	CABLE	UL2464(#26AWG*2P+AL/MY)+#26*8C OD=7.0mm	BLACK	1
4	MODING	PVC	BLACK	1
3	RING-NUT	BRASS, NICKEL PLATING		1
2	CONTACT	BRASS, FEMALE PIN, GOLD FLASH		12
1	CONNECTOR	M12-12P FEMALE CONNECTOR INSERT	BLACK	1

PART NO		KWPA-2FM-C301-001			
TITLE		WATERPROOF CONNECTOR, 12M(F), 12 PIN MOLDED CABLE ASS'Y			
REV : 01					
UNIT	DRAWN	CHKD	DATE	SHEET	
mm[inch]	CINDY	DANIEL	Nov. 21, '17	1 of 1	