

6

5

4






3

2

1

APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	12/10/04	
A		REDRAWN	2/6/15	AV/LL

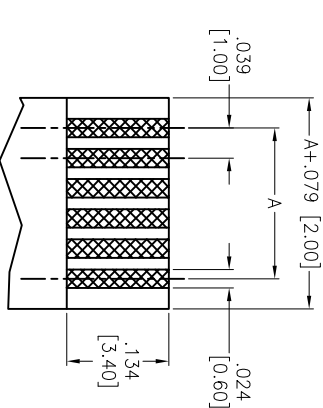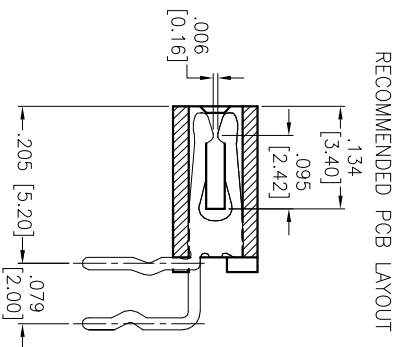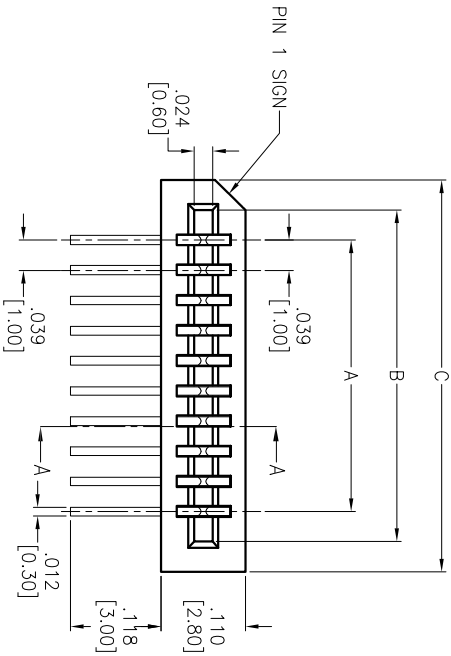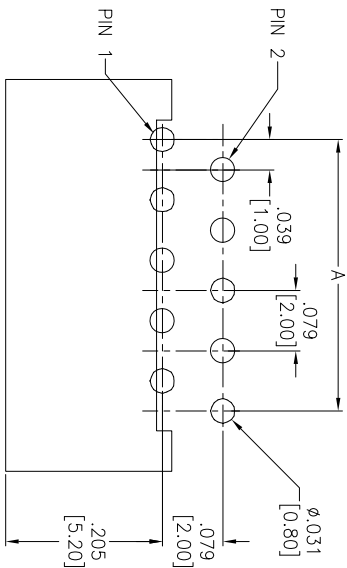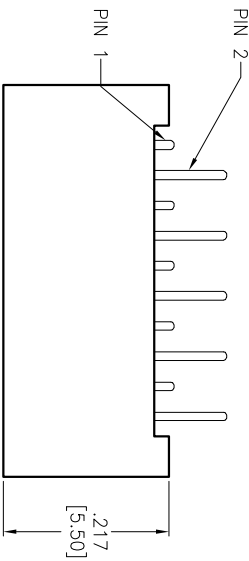

FPC/FPC T: .012±.002 [0.30±0.05]

SPECIFICATIONS:

Material: HI-Temp Thermoplastic, rated UL 94V-0
 Insulator color: Black
 Contacts: Phosphor Bronze

Plating: Tin over Nickel underplate overall

Operating voltage: 50 VAC max
 Current rating: 0.5 Amps max

Contact resistance: 30 mohms max initial

Insulation resistance: 500 Mohms min

Dielectric withstanding voltage: 500 VAC for 1 minute

Temperature Rating:

Operating temperature: -20°C to +85°C

Environmental:

Lead free, RoHS compliant

Positions: 3 thru 30
 A = .039 [1.00] x No. of Spaces
 B = A + .083 [2.10]
 C = A + .157 [4.00]

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED
 INCHES HOLE SIZES

.X	± .10	ØXX	± .10
.XX	± .020	ØXXX	± .015
.XXX	± .015	ØXXXX	± .010

APPROVALS

DRAWN	SS	10/4/04
CHECKED	AY	7/28/10
APPROVED		

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

LIF FLEX CIRCUIT CONNECTOR
 SIDE ENTRY, 2.00 MM PCB ROW SPACING

TITLE	SIZE	PART NO.	REV.
LIF FLEX CIRCUIT CONNECTOR	X	PCB-C-XX-SA-20	A
REF:	SCALE:	SHEET 1 OF 1	
S00045T	NIS		



6

5

4

3

2

1