


MALE

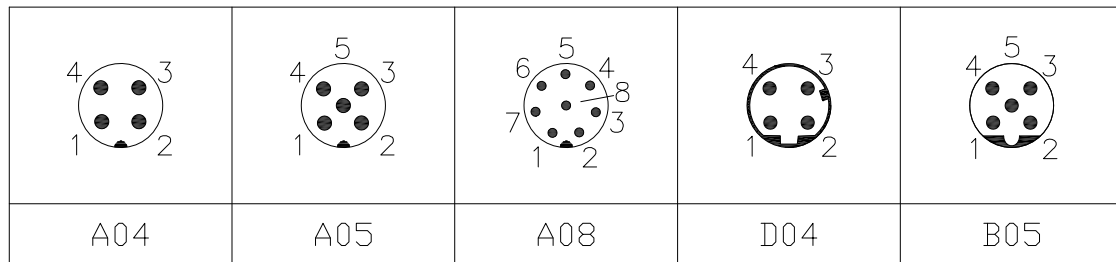

NOTE:

MATERIAL

M12 INSULATOR	PA66, UL94V-0, BLACK
SHELL	NICKEL PLATED BRASS
CONTACT	GOLD FLASH PLATED BRASS
NUT	NICKEL PLATED BRASS
O-RING	FKM, GREEN

ELECTRICAL

RATED CURRENT	2A(8P) / 4A(4/5P)
VOLTAGE	30V(8P) / 60V(5P) / 250V(4P)
INSULATOR RESISTANCE	100 MOhms MIN.
CONTACT RESISTANCE	10 mOhms MAX.
MATING CYCLES	100 CYCLES MIN

ENVIRONMENT

OPERATION TEMPERATURE	-40°C TO +85°C
IP RATING	IP67 (UNCOUPLED & COUPLED)

RECOMMENDED TORQUE

0.4Nm TO 0.8Nm

S58-YYY-MMR001

SERIES

S58 = M12 STRAIGHT ADAPTER

CONTACT ARRANGEMENT

A04 = (2X) 4P A-CODE
 A05 = (2X) 5P A-CODE
 A08 = (2X) 8P A-CODE
 D04 = (2X) 4P D-CODE
 B05 = (2X) 5P B-CODE

GENDER

MM = MALE / MALE

CONTACT PLATING

1 = GOLD FLASH

RoHS COMPLIANT



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:

J. KADEL

DATE:

12/20/2021

TOLERANCES
 .x ±0.5
 .xx ±0.2
 ANGULAR ±1°

UNITS = mm

DO NOT SCALE FROM DRAWING

NorComp

SCALE: NTS

SHEET 1 OF 1

REV 1

DWG NO.

S58-YYY-MMR001